Panasonic[®] **INSTRUCTION MANUAL**

Digital Fiber Sensor Amplifier FX-301B(P) FX-301G(P) FX-301H(P)

Thank you very much for using Panasonic products. Please read this Instruction Manual carefully and thoroughly for the correct and optimum use of this product. Kindly keep this manual in a convenient place for quick reference.

<u>∕!\</u> WARNING

Never use this product as a sensing device for personnel protection.

In case of using sensing devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country

For further details on the fiber sensor amplifier, please refer to 'Panasonic Industrial Devices SUNX website (http://panasonic.net/id/pidsx/global)' or contact our office.

1 SPECIFICATIONS

			Green LED type				
	Туре	Blue LED type	Infrared LED type				
Model	NPN output	FX-301B	FX-301G	FX-301H			
Item No.	PNP output	FX-301BP	FX-301GP	FX-301HP			
Supply voltag	е	12 to 24V	DC±10% Ripple P-P 10)% or less			
Power consur	mption	Normal operation: 720mW or less (current consumption 30mA or less at 24V supply voltage) ECO mode: 430mW or less (current consumption 18mA or less at 24V supply voltage) ECO mode: 600mW or less (current consumption 18mA or less at 24V supply voltage) (current consumption 25mA or less at 24V supply voltage)					
Output		NPN output type> NPN open-collector transistor NPN open-collector transistor Maximum sink current: 100mA (Note 1) Applied voltage: 30V DC or less (between output and 0V) Residual voltage: 1.5V or less [at 100mA (Note 1) sink current] [at 100mA (Note 1) sink current] [at 100mA (Note 1) source current]					
Output or	peration	Light-ON or Dark-ON, selectable with jog switch					
Short-circu	it protection	Incorporated					
Response tim	ie	150μ s or less, 250μ s or less, 2.0 ms or less selectable with jog switch					
Display		4 digit red LED display					
Sensitivity set	tting	2-level teaching / Limit teaching / Full-auto teaching / Manual adjustment					
Fine sensitivit adjustment fu		Incorporated					
Timer function		Incorporated with variable ON-delay / OFF-delay / ONE-SHOT timer, switchable either effective or ineffective					
Interference prevention function		Incorporated (up to four fibers can be mounted adjacently) (Note 2)					
Ambient temperature		-10 to +55°C (If 4 to 7 units are connected in cascade: -10 to +50°C, if 8 to 16 units are connected in cascade: -10 to +45°C) (No dew condensation or icing allowed), Storage: -20 to +70°C					
Ambient humidity		35 to 85% RH, Storage: 35 to 85% RH					
Emitting element		Blue LED (modulated) Green LED (modulated) Infrared LED (modulated)					
Material		Enclosure: Heat-resistant ABS, Transparent cover: Polycarbonate Press switches: Acrylic					
Weight		20g approx.					

Notes: 1) 50mA, when five, or more, amplifiers are connected in cascade.

- 2) When the power supply is switched on, the light emission timing is automatically set for interference prevention.
- 3) The cable for amplifier connection is not supplied as an accessory. Be sure to use the optional quick-connection cables given below.

Main cable (3-core): CN-73-C1 (cable length 1m), CN-73-C2 (cable length 2m) CN-73-C5 (cable length 5m)

Sub cable (1-core): CN-71-C1 (cable length 1m), CN-71-C2 (cable length 2m) CN-71-C5 (cable length 5m)

2 MOUNTING


How to mount the amplifier

- 1) Fit the rear part of the mounting section of the amplifier on a 35mm width DIN rail.
- 2 Press down the rear part of the mounting section of the unit on the 35mm width DIN rail and fit the front part of the mounting section to the DIN rail.

How to remove the amplifier

- 1) Push the amplifier forward.
- 2 Lift up the front part of the amplifier to remove it.


Note: Take care that if the front part is lifted without pushing the



How to connect the fiber cables

Be sure to fit the attachment to the fibers first before inserting the fibers to the amplifier. For details, refer to the instruction manual enclosed with the fibers.

- 1 Snap the fiber lock lever down
- 2 Insert the fiber cables slowly into the inlets until they stop. (Note 1) 3 Return the fiber lock lever to the original position, till it stops.
- Notes: 1) In case the fiber cables are not inserted to a position where they stop, the sensing range reduces. In case of a flexible fiber, take care that it may bend inside the amplifier, during insertion
 - 2) With the coaxial reflective type fiber, such as, FD-G4 or FD-FM2, insert the single-core fiber cable into the beam-emitting inlet and the multi-core fiber cable into the beam-receiving inlet. If they are inserted in reverse, the sensing accuracy will dete



n width DIN rail


3 CONNECTION

Make sure that the power supply is off while connecting or disconnecting the quick-connection cable

- 1 Holding the connector of the quick-connection cable, align its projection with the groove at the top portion of the amplifier connector.
- 2 Insert the connector till a click is felt

Disconnection method

- ① Pressing the projection at the top of the quick-connection cable, pull out the connector.
- Note: Take care that if the connector is pulled out without pressing the projection, the projection may break. Do not use a quick-connection cable whose projection has broken. Further, do not pull by holding the cable, as this can cause a cable-break.



4 CAUTIONS

- This product has been developed / produced for industrial use only.
- Make sure that the power supply is off while wiring.
- Verify that the supply voltage variation is within the rating.
- Take care that if a voltage exceeding the rated range is applied, or if an AC power supply is directly connected, the sensor may get burnt or damaged.
- In case noise generating equipment (switching regulator, inverter motor, etc.) is used in the vicinity of this product, connect the frame ground (F.G.) terminal of the equipment to an actual ground. • If power is supplied from a commercial switching regulator, ensure that the frame
- ground (F.G.) terminal of the power supply is connected to an actual ground. • Do not use during the initial transient time (0.5 sec.) after the power supply is switched on.
- Take care that short-circuit of the load or wrong wiring may burn or damage the sensor. • Do not run the wires together with high-voltage lines or power lines or put them in
- the same raceway. This can cause malfunction due to induction
- Be sure to use the optional guick-connection cable.
- Extension up to total 100m (if 5 to 8 units are connected in cascade: 50m, if 9 to 16 units are connected in cascade: 20m) is possible with 0.3mm², or more, cable. However, in order to reduce noise, make the wiring as short as possible.
- Take care that cable extension increases the residual voltage
- This sensor is suitable for indoor use only.
- Avoid dust, dirt, and steam
- Take care that the product does not come in contact with water, oil, grease. organic solvents, such as, thinner, etc., strong acid or alkaline.
- This sensor cannot be used in an environment containing inflammable or explosive gases.
- Never disassemble or modify the sensor.

5 CASCADING

- Make sure that the power supply is off while adding or removing the amplifiers. • Make sure to check the allowable ambient temperature, as it depends on the number of amplifiers connected in cascade.
- In case two, or more, amplifiers are connected in cascade, make sure to moun them on a DIN rail.
- When the amplifiers move on the DIN rail depending on the attaching condition or the amplifiers are mounted close to each other in cascade, fit them between the optional end plates (MS-DIN-E) mounted at the two ends.
- Up to maximum 15 amplifiers can be added (total 16 amplifiers connected in
- When connecting more than two amplifiers in cascade, use the sub cable (CN-71-C□) as the quick-connection cable for the second amplifier onwards.
- When connecting amplifiers not close to each other in parallel, be sure to mount the optional end plate (MS-DIN-E) at both sides of each amplifier or affix the communication window seal of the accessory amplifier protection seal (FX-MB1) to the communication windows.
- The settings other than the interference prevention function cannot be transmitted between this product and other digital fiber amplifiers. Therefore, in case both models of amplifiers are mounted in cascade, be sure to mount identical models together. However, the interference prevention function is not incorporated into the FX-301(P)-HS. Take care when the sensors are mounted in cascade
- Since the communication function of this product and that of the FX-301(P)-F is different, if these models are mounted in cascade, affix the accessory amplifier protection seal (FX-MB1) to the communication windows of the amplifiers.


For mounting and removing the amplifier, refer to ' MOUNTING'

Cascading method


- 1 Mount the amplifiers, one by one on the 35mm width DIN rail.
- 2 Slide the amplifiers next to each other, and connect the quick-connection cables.
- 3 Mount the optional end plates (MS-DIN-E) at both the ends to hold the amplifiers between their flat sides
- 4) Tighten the screws to fix the end plates

Dismantling

- 1 Loosen the screws of the end plates.
- 2 Remove the end plates.
- 3 Slide the amplifiers and remove them one by one.



6 I/O CIRCUIT DIAGRAMS

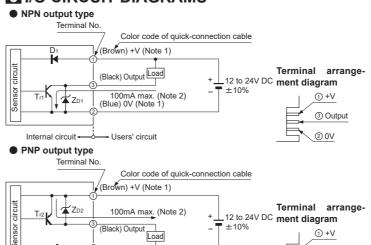


Internal circuit -Notes: 1) The guick-connection sub cable does not have +V (brown) and 0V (blue). The power is supplied from the connector of the main cable.

2) 50mA max., if five, or more, the amplifiers are connected in cascade.

(Blue) 0V (Note 1)

Symbols...D1, D2: Reverse supply polarity protection diode 7p1 7p2: Surge absorption zener diode Tr1: NPN output transistor Tr2: PNP output transistor

7 PART DESCRIPTION



8 OPERATION PROCEDURE


 When the power supply is switched on, communication self-check is carried out and normal condition is ADJ DIGITAL PROPERTY.


**THERM TO THE PROPERTY OF T displayed [MODE indicator / RUN (green)] lights up and the digital display shows the incident light intensity.

MODE key	Jog switch					
Press	Press	Turn				
Fiess	riess	'+' side	'-' side			

- *1: When Jog switch is pressed, the setting is confirmed.
- *2: When MODE key is pressed for 2 sec., or more, the sensor returns to the 'RUN' mode.
- *3: Cancellation is possible by pressing MODE key during setting.
- *4: When Jog switch is turned in the 'RUN' mode, the current threshold value is displayed And then, the current incident light intensity display appears again automatically.

NAVI mode

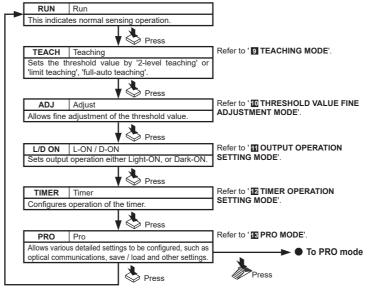

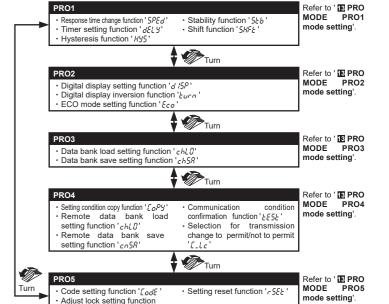

The 0-ADJ setting function in this product was removed from production starting May, 2005.

9 TEACHING MODE

In case of 2-level teaching

■ PRO mode

① +V

② 0V

③ Output

• This is the method of setting the threshold value by teaching two levels, corresponding to the object present and object absent conditions. Normally, setting is done by this method.

Step	Display	Description
1	1234	Set the fiber within the sensing range. Press MODE key to light up MODE indicator / TEACH (yellow). Press Pres
2	587	Press Jog switch in the object present condition. If the teaching is accepted, the read incident light intensity blinks in the digital display.
3	1234	The MODE indicator / TEACH (yellow) blinks. Press Jog switch in the object absent condition. Press
4	9000	 If the teaching is accepted, the read incident light intensity blinks in the digital display and the threshold value is set at the mid-value between the incident light intensities in the object present and the object absent
	HArd	conditions. After this, the judgment on the stability of sensing is displayed. In case stable sensing is possible: '\$ood' is displayed. In case stable sensing is not possible: 'HRrd' is displayed.
(5)	900	The threshold value is displayed.
6		' ' ' blinks in the digital display.
7	1234	The incident light intensity appears in the digital display and the setting is complete.

In case of limit teaching

• This is the method of setting the threshold value by teaching only the object absent condition (stable incident light condition). This is used for detection in the presence of a background body or for detection of small objects.

Step	Display	Description
1	1234	Set the fiber within the sensing range. Press MODE key to light up MODE indicator / TEACH (yellow). Press Press ADJ HUMBER ADJ H
2	1234	Press Jog switch in the object absent condition. If the teaching is accepted, the read incident light intensity blinks in the display.
3	1234	The MODE indicator / TEACH (yellow) blinks. Turn Jog switch to the '+' side or the '-' side. Turn
4		If Jog switch is turned to the '+' side, ' , ' scrolls (twice) the display from right to left, and the threshold level is shifted to a value approx. 15% higher (lower sensitivity) than that set at ②. (Note) This is used in case of reflective type fibers. If Jog switch is turned to the '-' side, ', 'scrolls (twice) the display from left to right, and the threshold level is shifted to a value approx. 15% lower (higher sensitivity) than that set at ②. Turn to '-' side (Note) This is used in case of thru-beam type fibers. OFF Sensitivity level Sensitivity
will be displayed.		When the shift is possible: ' 9000' is displayed.
	KArd	When the is not possible: '##rd' is displayed.
6	1420	The threshold value is displayed.
7		' ' ' blinks in the digital display.
8	1234	The incident light intensity appears in the digital display and the setting is complete.

Note: The approx. 15% amount of shift is the initial value. The amount of shift can be changed in the PRO mode from approx. 0 to 80% (5% step). Refer to ' TPRO MODE / PRO1 mode setting for the setting method.

In case of full-auto teaching

• Full-auto teaching is used when it is desired to set the threshold value without stopping the assembly line, with the object in the moving condition.

topping the describly line, with the object in the moving condition.							
Step	Display	Description					
1	1234	Set the fiber within the sensing range. Press MODE key to light up MODE indicator / TEACH (yellow). Press Pres					
2	567	Press Jog switch continuously for 0.5 sec. or more with the object moving on the assembly line. (The incident light intensity is displayed during sampling.) Press					
3	Ruto	• ' \$uŁo' is displayed on the digital display. Release the jog switch when the object has passed.					
4	900d	 If the teaching is accepted, the read incident light intensity blinks in the digital display and the threshold value is set at the mid-value between the incident light intensities in the object present and the object absent 					
	HRrd	conditions. After this, the judgment on the stability of sensing is displayed. In case stable sensing is possible: '9ood' is displayed. In case stable sensing is not possible: '48rd' is displayed.					
5	900	The threshold value is displayed.					
6		' ' ' blinks in the digital display.					
7	1234	The incident light intensity appears in the digital display and the setting is complete.					

10 THRESHOLD VALUE FINE ADJUSTMENT MODE


- Fine adjustment of the threshold value can be done when MODE indicator / ADJ (yellow) lights up.
- · When Jog switch is turned to the '+' side, the threshold
- value increases (sensitivity decreases).

When Jog switch is pressed, the threshold value is confirmed



· When Jog switch is turned to the '-' side, the threshold value decreases (sensitivity

When Jog switch is pressed, the threshold value is confirmed.




Note: Set the threshold value at least a bit higher than the minimum threshold value. (The minimum threshold value is where the value cannot be lowered any further even if the jog switch is

11 OUTPUT OPERATION SETTING MODE

- The output operation setting can be done when MODE indicator / L/D ON (yellow) lights up.
- · The output operation is changed when Jog switch is turned to the '+' side or the '-' side.


When Jog switch is pressed, the threshold value is confirmed



12 TIMER OPERATION SETTING MODE

- The setting for whether the timer is used or not can be done when MODE indicator / TIMER (yellow) lights up.

 **RUN | RUN | ADJ | A
- 10ms OFF-delay (initial value) timer is automatically set
- when the timer is set to be used.
- Refer to
 PRO MODE / PRO1 mode setting' for the setting method of the OFF-delay timer, ON-delay timer and ONE-SHOT timer intervals.





Notes: 1) The timer interval set in the PRO mode is displayed 2) The factory setting is without timer 'non'

18 PRO MODE


For details of the settings and the setting procedure of the PRO mode, refer to 'Panasonic Industrial Devices SUNX website (http://panasonic.net/id/pidsx/global)' or contact our office.

(yellow) lights up.




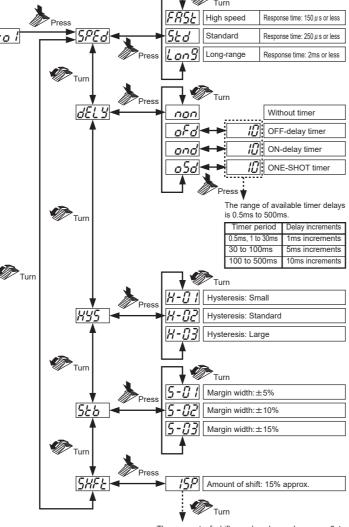


The amount of shift can be changed approx. 0 to 80% (5% step).

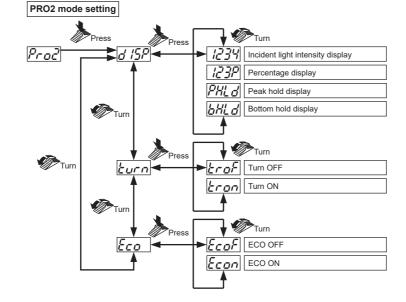

PRO3 mode setting

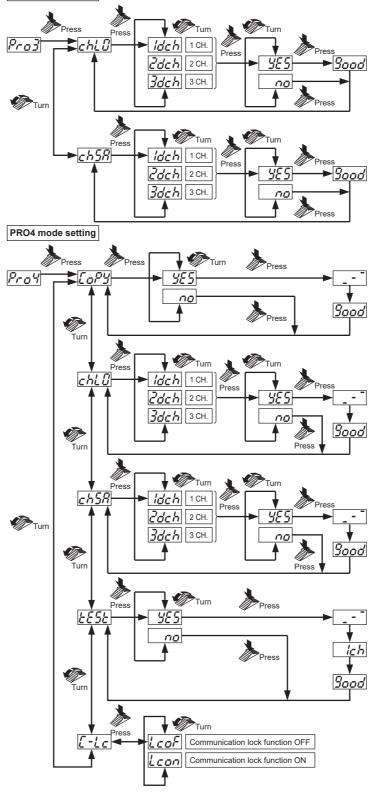

The 0-ADJ setting function in this product was removed from production starting May, 2005.

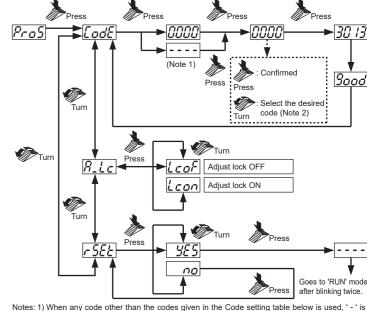

Notes: 1) When any code other than the codes given in the Code setting table below is used, ' - ' is displayed. The factory setting is 'ពូវជាម '. 2) When the code setting function is used, refer to the 'Code setting table' given below.

Code setting table



1st figure			2nd figure			3rd figure			4th figure	
Direct code	Response time	Hyster- esis	Direct code	L-ON/ D-ON	Display	Direct code	Adjust lock	Timer operation	Direct code	Timer
-	STD	H-02 (standard)	- C	L-ON	digit	G G	ON	NON	- C	OFF
1	STD	H-03 (large)	/	L-ON	Percent	1	ON	OFF-delay	/	1ms
2	STD	H-01 (small)	2	L-ON	Peak hold	2	ON	ON-delay	2	3ms
3	LONG	H-02 (standard)	3	L-ON	Bottom hold	3	ON	ONE-SHOT	3	5ms
4	LONG	H-03 (large)	4	D-ON	digit	4	OFF	NON	4	10ms
5	LONG	H-01 (small)	5	D-ON	Percent	5	OFF	OFF-delay	5	30ms
8	FAST	H-02 (standard)	8	D-ON	Peak hold	Б	OFF	ON-delay	8	50ms
7	FAST	H-03 (large)	7	D-ON	Bottom hold	7	OFF	ONE-SHOT	7	100ms
8	FAST	H-01 (small)	-	_	_	-	_	_	8	300ms
_	_	_	-	_	_	-	_	_	9	500ms

3) In order to change PRO mode setting to 'RUN' mode, press MODE key for 2 sec. or more.

14 KEY LOCK FUNCTION

• If the jog switch and MODE key are pressed for more than 2 sec. at the same time in 'RUN' mode condition, the key operations are locked, and only the threshold value confirmation function or the adjust function (valid only when the adjust lock function is canceled) is valid. To cancel the lock function, press both the keys for more than 2 sec. once again.

15 ERROR INDICATION

In case of errors, attempt the following measures.

•	, attompt the ron			
Display	Error description	Measures		
The load has short-circuited and excess current is flowing.		Turn off the power, then check the load.		
£r-5	Communication error has occurred at the time of connection in cascade.	Check that the mounted amplifiers are in close contact with each other.		

Panasonic Industry Co., Ltd. Panasonic Industrial Dévices SUNX Co., Ltd.

https://panasonic.net/id/pidsx/globa

Please visit our website for inquiries and about our sales network.

Panasonic Industrial Devices SUNX Co., Ltd. 2022 September, 2022

PRINTED IN JAPAN