

Panasonic INSTRUCTION MANUAL

Compact Laser Displacement Sensor

Standard type **High-function type**

HL-G1□-A-C5 **HL-G1□-S-J**

0815170 MJE-HLG1 No.0084-26V

Thank you very much for purchasing Panasonic products. Read this Instruction Manual carefully and thoroughly for the correct and optimum use of this product. Kindly keep this manual in a convenient place for quick reference.

Download the **HL-G1** Series User's Manual (PDF) from our Website. (<http://panasonic.net/id/pidsx/global>). Be sure to refer to the User's Manual for information in detail before making settings in the control panel of the sensor head.

- WARNING**
- This product is intended to detect the objects and does not have the control function to ensure safety such as accident prevention.
 - Do not use the product as a sensing device to protect human body.
 - Please use the products that comply with local laws and standards for human body protection specified by e.g., OSHA, ANSI and IEC.
 - Install a fail-safe device when the product is used for the purpose that has a possibility of physical injury or serious extended damage.
 - Do not use the product in the atmosphere of flammable gas, to prevent explosion.

BEFORE USE

- Before using the product, check the sensor head model and contents of packing.
- Sensor head model**
Check the model name of product at the top of sensor head.
- Packing**
Check that all of the following components are included in the package.
- 1 sensor head unit
 - 2 Instruction manual (Japanese / English: 1, Chinese / Korean: 1)
 - Laser warning labels (one set)

1 OVERVIEW

- This product is a compact laser displacement sensor incorporating a digital display and controller functions.
- The standard type has three outputs plus analog outputs (current and voltage outputs), thus supporting multi input signals.
- The high-function type incorporates serial communications functions in addition to the specifications of the standard type, and can be easily controlled by host devices.

2 CAUTIONS ON HANDLING LASER LIGHT

- In order to prevent the accidents by laser product and protect the users, IEC, JIS, GB, KS and FDA establish the following standards respectively.
 - IEC : IEC 60825-1:2014 (EN 60825-1:2014)
 - JIS : JIS C 6802:2014
 - GB : GB 7247.1-2012
 - KS : KS C IEC 60825-1:2013
 - FDA : PART 1040(PERFORMANCE STANDARDS FOR LIGHT-EMITTING PRODUCTS)
- These standards classifies laser products according to the level of hazard and provide the safety measures for respective classes.


Laser hazardous class

Classification according to IEC 60825-1:2014(JIS C 6802:2014)

Class	Model	Description of hazardous evaluation
Class 2	HL-G1□-A-C5 HL-G1□-S-J	Visible beam, low power. Blink response of eye affords protection.

WARNING label

<English>




<Japanese>




<Chinese>



<Korean>




<Label position>

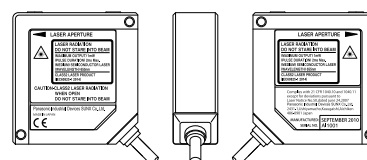

- Install the product so the laser beam comes higher or lower than eye level in order not to watch the beam directly during operation. Laser safety distance (Nominal Ocular Hazard Distance: NOHD) is approx. 0.4 m. The laser beam must be terminated at the end of its path by a diffuse reflector or an absorber.
- Please contact Panasonic Industrial Devices SUNX if the system breaks down. It is not equipped with a function that stops laser radiation automatically during disassembling the sensor head. The users therefore may be exposed to laser beam in disassembling the sensor head.
- Do not use the system in the manner other than specified in this Instruction Manual.

3 I/O BLOCK AND NOMENCLATURE

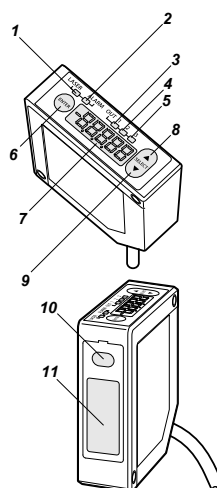

Name	Function	Wiring color
A(V)	Analog voltage output	Shield single conductor
AGND	Analog ground	White
A(I)	Analog current output	Shield single conductor
AGND	Analog ground	Gray
OUT1	Judgment output 1	Black
OUT2	Judgment output 2	White
OUT3	Judgment output 3 or alarm output	Gray
TM	Timing input	Pink
MI	Zero-set, Reset, Memory change, Teaching, Save, and Laser control inputs	Violet
NP	NPN / PNP type switching input	Pink / Violet
+SD	Transmission data	Twisted -pair wire
-SD	Transmission data	Green
+RD	Reception data	Sky Blue
-RD	Reception data	Orange
SG	Signal ground	Twisted -pair wire
+V	24 VDC input for power supply	Yellow
0V	Power supply ground	Shield
		Brown
		Blue

* No SD/RD terminals are prepared for HL-G1□-A-C5 standard types.

- 1 Laser Indicator (LASER)
- 2 Alarm Indicator (ALARM)
- 3 OUT1 Indicator (OUT1)
- 4 OUT2 Indicator (OUT2)
- 5 OUT13 Indicator (OUT3)
- 6 [ENTER] Key
- 7 Digital Display
- 8 [UP] Key
- 9 [DOWN] Key
- 10 Emitter
- 11 Receiver

4 SPECIFICATIONS

Model	Standard type	HL-G103-A-C5	HL-G105-A-C5	HL-G108-A-C5	HL-G112-A-C5	HL-G125-A-C5
No.	High-function type	HL-G103-S-J	HL-G105-S-J	HL-G108-S-J	HL-G112-S-J	HL-G125-S-J
Measurement method		Diffuse reflection				
Measurement center distance		30mm	50mm	85mm	120mm	250mm
Measurement method		±4mm	±10mm	±20mm	±60mm	±150mm
Beam source		Red semiconductor laser Class 2 (JIS / IEC / GB / KS / FDA laser notice No. 50) Max output: 1mW, Emission peak wavelength: 655nm				
Beam diameter (Note 2)		0.1 × 0.1mm	0.5 × 1mm	0.75 × 1.25mm	1.0 × 1.5mm	1.75 × 3.5mm
Beam receiving element		CMOS image sensor				
Resolution		0.5μm	1.5μm	2.5μm	8μm	20μm
Linearity		±0.1%F.S.				
Temperature characteristics		±0.08%F.S./°C				
Supply voltage		24V DC ±10% including ripple 0.5V (P - P)				
Current consumption		100 mA max.				
Sampling cycle		200μs, 500μs, 1ms, 2ms				
Output operation		Output range: 0 to 10.5 V (normal), 11 V (at alarm) Output impedance: 100Ω				
Short-circuit protection		Output range: 3.2 to 20.8 mA (normal), 21.6 mA (at alarm) Load impedance: 300Ω max.				
OUT1 OUT2 OUT3		Judgment output or alarm output (switchable) NPN open-collector transistor / PNP open-collector transistor (switchable) <Settings for NPN> <ul style="list-style-type: none">• Peak in-flow current: 50mA• Applied voltage: 3 to 24V DC (between output and 0V)• Residual voltage: 2V max. (at in-flow current of 50mA)• Leakage current: 0.1mA or less <Settings for PNP> <ul style="list-style-type: none">• Peak in-flow current: 50mA• Residual voltage: 2.8V max. (at in-flow current of 50mA)• Leakage current: 0.1mA or less				
NP switching input		At 0V: NPN open-collector output At supply voltage of 24V DC: PNP open-collector output				
Timing input		NPN operation: ON when connecting or connected to 0V (depending on settings) PNP operation: ON when connecting or connected to positive terminal of external power supply (depending on settings)				
Multiple input		Zero set, reset, Memory change, Teaching, Save, or Laser control depending on input time. NPN operation: Depending on time to connect 0 V PNP operation: Depending on time to connect positive terminal of external power supply				
Communications interface (high-function type)		RS-422 or RS-485 Baud rate: 9,600 / 19,200 / 38,400 / 115,200 / 230,400 / 460,800 / 921,600 bps Data length: 8 bits, stop bit length: 1 bit, parity check: none, BCC: yes, end code: CR				
Laser radiation indicator		Green LED ON at laser radiation				
Alarm indicator		Orange LED ON when measurement is disabled due to insufficient amount of light				
Output indicator		Yellow LED (No. of indicators: 3) ON at output				
Digital display		Red LED for sign and 5-digit display				
Protective structure		IP67 (except connector)				
Pollution degree		2				
Insulation resistance		20MΩ min. at 250V DC megger (between charged parts and casing)				
Dielectric Withstand		1,000V AC for 1 min. (between charged parts and casing)				
Vibration resistance		Endurance: 10 to 55 Hz (at 1-minute cycle), 1.5 mm double-amplitude				
Vibration resistance		500ms ² three times each in X, Y, and Z directions				
Ambient illumination (Note 3)		3,000lx max. (illumination level of light receiving surface under incandescent light)				

Notes: 1) The following measurement conditions are applied unless otherwise specified: power voltage: 24V DC, ambient temperature: 20°C, sampling cycle: 500µs, average number of sampling times: 1.024 times, measurement center distance, and measurement object: white ceramic.

2) The diameter is the size of the object at the measurement center distance and determined by $1/e^2$ (approximately 13.5%) of the center beam intensity. The reflectance around the detecting point may be higher than at the point due to leak light outside the specified area, and this may affect the measurement value.

3) The distance is ± 0.1 mm, or less, depending on the ambient light intensity.

4) Do not use or store in an environment that has been pressurized to an air pressure higher than the atmospheric pressure at 0 m.

Connections

- Be sure to turn OFF the power supply before connecting or disconnecting any connectors.
- When connecting or disconnecting the connectors, be sure to hold the connector area not to apply extra force to the cable.
- Be careful not to touch terminals or to let foreign objects get in the connector after disconnecting connectors.
- Be careful not to apply force to around the connector of sensor head cable and extension cable. Do not bend the cables near connectors, which causes disconnection of the cable.

Wiring

- Do not roll up the sensor cable (bundle in parallel) with other wirings. Keep it at least 100mm away from other wires. Cables should be separated from high voltage and power circuit lines. If it is unavoidable, shield it by running through a conductive material such as grounded electrical conduit.
 - Install the product as far away as possible from noise source such as high-voltage lines, high-voltage device, power lines, power device, machines which generate a large starting and stopping surge, welding machines and inverter motor.
 - Make sure that the length of signal and power lines connected to the product is less than 30m in order to meet CE marking / UKCA marking requirements.
Attach a ferrite core to the head cable as shown.
- Recommended ferrite core:
SEIWA ELECTRIC MFG. Co., Ltd.
E04SR200935AB or equivalent one
- Do not pull the cable with a force of 29.4 N or greater.
 - When bending the cable, bend it at least 20 mm away from the cable lead-out part with the minimum bending radius of 30 mm or more.
 - When wiring the cable, do not apply undue stress to the base of the cable connection and unwind the cable from the roll.
 - When moving the sensor head during operation, be careful not to apply excessive bending stress to the cable. The cable in the moving part may be damaged. Therefore, use an extension cable for the moving part and, when the extension cable is damaged, immediately replace it. Otherwise, it may result in failure.
-
- 30mm max.
- 20mm min.
- R30mm min.
- When wiring the cable, unwind the cable from the roll.


Warming Up

- Allow at least 30 minutes of warming up after turning on the power to ensure the performance of the product.


Environment

- Mount the sensor head to an aluminum or steel plate with a minimum surface area of 200cm^2 if the ambient temperature is 40°C or higher. In the case of installing two or more sensor heads in parallel, mount each sensor head to an aluminum or steel plate with a minimum surface area of 200cm^2 and make sure that the ambient temperature does not exceed 40°C .
- The life of the semiconductor laser depends on the ambient temperature during use. When using the product near a heat source, take measures to keep the ambient temperature of the sensor head as lower as possible. Mount the sensor on a device having good heat radiation because the sensor itself also generates heat.
- Keep the emitter surface and the receiver surface clean, not to attach light refractors such as water, oil and fingerprints, or light blockers such as dust and dirt. When cleaning these parts, wipe them off using a soft lint-free cloth or lens cleaning paper.
- Install the sensor head at where extraneous light (such as sunlight or light which has the same wavelength as laser beam) does not enter the receiver. If high accuracy is required, install a light shield plate or the like on the sensor head.
- The sensor head has protection against immersion, while the connectors are not structurally dustproof, waterproof, or corrosion-resistant. Do not use the product underwater or in the rain.
- Do not use the product in dusty places or that exposed to flammable or corrosive gases, droplet, direct sunlight, severe vibration or impact.

- **NPN Type**

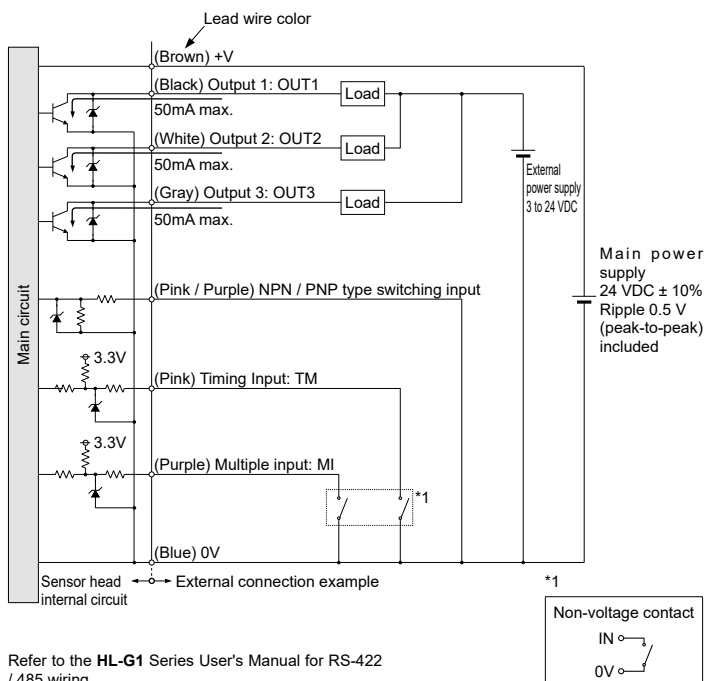

- PNP Type

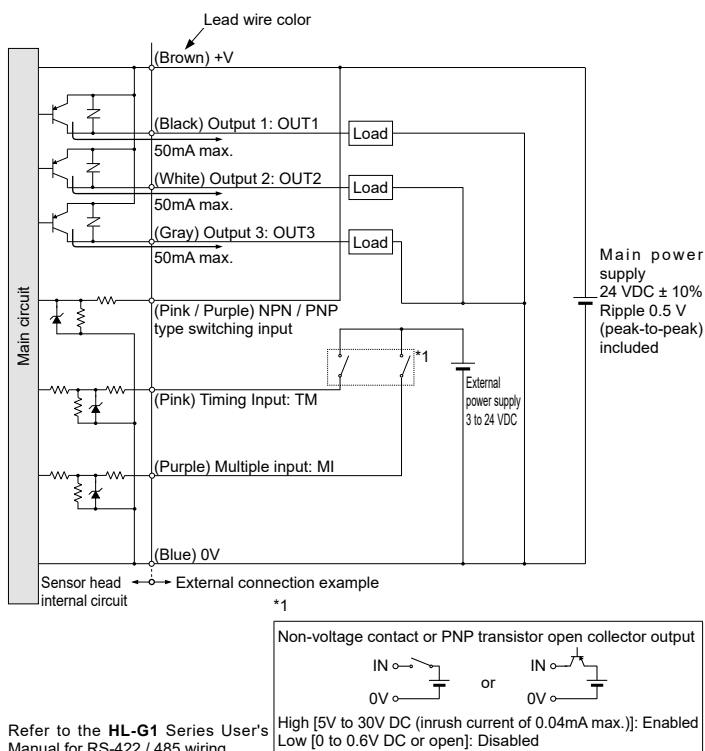

- This product conforms to the regulations and standards below.

<Conformity Directives / Conforming Regulations>

EU Law: EMC Directives 2014/30/EU

British Legislation : EMC Regulations 2016/1091

- **Applicable Standards**

EN 61000-6-4:2007 +A1:2011, EN 61000-6-2:2005

Panasonic Industry Co., Ltd.
Panasonic Industrial Devices SUNX Co., Ltd.

<https://panasonic.net/id/pidsx/global>

Please visit our website for inquiries and about our sales network.

Panasonic Industrial Devices SUNX Co., Ltd. 2022

September, 2022

PRINTED IN JAPAN