

Document No.: SX-DSV03025

---

Revision No.: 12.0

---

Date of Issue: July 16, 2024

---

Classification: ☐ New ☒ Change

---

# SPECIFICATIONS

Product Name: AC Servo Driver

Product Series Name: MINAS A6S Series for Rotary motor

Product Model Number: Position control type/General-purpose communication type/Multifunction type

Motion Control Business Unit, Industrial Device Business Division  
Panasonic Industry Co., Ltd.  
7-1-1 Morofuku, Daito City, Osaka, 574-0044, Japan

If you have any questions, please contact the sales office or distributor of the product.

**Panasonic**

# REVISIONS

| Date          | Rev. | Page             | Description                                                                    | Signed |
|---------------|------|------------------|--------------------------------------------------------------------------------|--------|
| Sep. 1, 2015  | 0.0  | —                | NEWLY ISSUED                                                                   | —      |
| Nov. 1, 2015  | 1.0  | —                | Updated default parameters                                                     | —      |
| Sep. 14, 2016 | 2.0  | P1               | Updated model symbols                                                          | —      |
|               |      | P1               | Changed company name                                                           |        |
|               |      | P1, P3, P63, P75 | Added MEDLT93SF model                                                          |        |
|               |      | P4 to 6          | Added features                                                                 |        |
|               |      | P16              | Corrected the connector pin No. of RS485 signal                                |        |
|               |      | P66              | Added description of harmonic suppression factor                               |        |
|               |      | P73 to 75        | Corrected inrush current value for control power supply                        |        |
| Mar. 20, 2019 | 3.0  | —                | Added sizes G and H                                                            | —      |
|               |      | —                | Updated other contents according to the latest Japanese version                |        |
| Apr. 7, 2020  | 4.0  | —                | Added 400 V model                                                              | —      |
|               |      | —                | Updated other contents according to the latest Japanese version                |        |
|               |      | —                | Corrected typographical errors                                                 |        |
| Sep. 25, 2020 | 5.0  | —                | Added information regarding the attached table, corrected typographical errors | —      |
|               |      | —                | Changed the title of this specification to “Standard Specifications”           |        |
| Mar. 1, 2021  | 6.0  | —                | Added Size D 400 V specification, corrected typographical errors               | —      |
| July 5, 2021  | 7.0  | —                | Changed name of business unit                                                  | —      |
|               |      | —                | Changed cover format                                                           |        |
|               |      | —                | Corrected typographical errors                                                 |        |
|               |      | —                | Updated default parameters                                                     |        |
| Sep. 3, 2021  | 8.0  | —                | Corrected typographical errors                                                 | —      |
| Nov. 1, 2021  | 9.0  | —                | Changed company name                                                           | —      |
|               |      | P78, 79          | Updated the description of global standards                                    |        |
|               |      | P92              | Added a note about network security                                            |        |
|               |      | P93              | Added a note about reverse engineering                                         |        |
|               |      | —                | Updated the default value of parameters                                        |        |
| Apr. 1, 2022  | 10.0 | —                | Changed to our updated format and revised to standardize expressions           | —      |
|               |      | —                | Changed company name                                                           |        |

| Date          | Rev. | Page     | Description                                                                                                      | Signed |
|---------------|------|----------|------------------------------------------------------------------------------------------------------------------|--------|
| Oct. 31, 2022 | 11.0 | —        | Changed Compliance with the international standards<br>Corrected typographical errors                            | —      |
| Jul. 16, 2024 | 12.0 | P1       | Added a note about OSS note to Precautions                                                                       | —      |
|               |      | P47      | I/O Signal Interface Di-1 (2)<br>Corrected typographical errors                                                  |        |
|               |      | P79      | Added Compliance with EN61800-5-1:2007/A11:2021                                                                  |        |
|               |      | P86      | Added text to “Load protection and overheating protection”<br>column                                             |        |
|               |      | P100~102 | Product number, corrected typographical errors<br>Corrected typo regarding maximum output current<br>(MGDLTC3SF) |        |
|               |      | —        | Updated the default value of parameters                                                                          |        |

## Table of Contents

|                                                               |    |
|---------------------------------------------------------------|----|
| 1 Scope of Application .....                                  | 1  |
| 2 How to Read Product Numbers .....                           | 2  |
| 3 Product Line-up .....                                       | 3  |
| 3.1 Position control type .....                               | 3  |
| 3.2 General-purpose communication type .....                  | 4  |
| 3.3 Multifunction type .....                                  | 5  |
| 4 Specifications .....                                        | 6  |
| 5 Appearance and Part Names .....                             | 8  |
| 5.1 Size A, B 100 V/200 V .....                               | 8  |
| 5.2 Size C, D 100 V/200 V .....                               | 9  |
| 5.3 Size E 200 V .....                                        | 10 |
| 5.4 Size F 200 V .....                                        | 11 |
| 5.5 Size G 200 V .....                                        | 12 |
| 5.6 Size H 200 V .....                                        | 13 |
| 5.7 Size D 400 V .....                                        | 14 |
| 5.8 Size E 400 V .....                                        | 15 |
| 5.9 Size F 400 V .....                                        | 16 |
| 5.10 Example nameplate .....                                  | 17 |
| 5.11 Front panel .....                                        | 18 |
| 6 Dimensions .....                                            | 19 |
| 6.1 Size A 100 V/200 V .....                                  | 19 |
| 6.2 Size B 100 V/200 V .....                                  | 21 |
| 6.3 Size C 100 V/200 V .....                                  | 23 |
| 6.4 Size D 200 V/400 V .....                                  | 25 |
| 6.5 Size E 200 V/400 V .....                                  | 27 |
| 6.6 Size F 200 V/400 V .....                                  | 29 |
| 6.7 Size G 200 V/400 V .....                                  | 31 |
| 6.8 Size H 200 V/400 V .....                                  | 33 |
| 7 Configuration of Connectors and Terminal Blocks .....       | 34 |
| 7.1 Power Connectors XA, XB, XC, XD and Terminal Blocks ..... | 34 |
| 7.1.1 Size A, B 100 V/200 V .....                             | 34 |
| 7.1.2 Size C, D 100 V/200 V .....                             | 35 |
| 7.1.3 Size E 200 V .....                                      | 35 |
| 7.1.4 Size F 200 V .....                                      | 36 |
| 7.1.5 Size G 200 V .....                                      | 37 |
| 7.1.6 Size H 200 V .....                                      | 38 |
| 7.1.7 Size D, E 400 V .....                                   | 39 |
| 7.1.8 Size F 400 V .....                                      | 40 |
| 7.2 USB Connector X1 .....                                    | 41 |
| 7.3 Serial bus connector X2 .....                             | 41 |

|          |                                                                |    |
|----------|----------------------------------------------------------------|----|
| 7.4      | Safety Function Connector X3 .....                             | 41 |
| 7.5      | Parallel I/O connector X4 .....                                | 42 |
| 7.5.1    | Input signals (common) and their functions .....               | 42 |
| 7.5.2    | Input signals (pulse train commands) and their functions ..... | 42 |
| 7.5.3    | Input signals (analog commands) and their functions .....      | 43 |
| 7.5.4    | Functions that can be allocated to analog inputs .....         | 43 |
| 7.5.5    | Output signals (common) and their functions .....              | 43 |
| 7.5.6    | Encoder Output Signal/Position Compare Output Signal .....     | 44 |
| 7.5.7    | Analog monitor signals and their functions .....               | 44 |
| 7.5.8    | Other .....                                                    | 44 |
| 7.6      | External Scale Connector X5 .....                              | 45 |
| 7.7      | Encoder Connector X6 .....                                     | 45 |
| 7.8      | I/O Signal Interface .....                                     | 46 |
| 8        | Wiring and System Configuration .....                          | 48 |
| 8.1      | Cables Used and Maximum Cable Lengths .....                    | 48 |
| 8.2      | Cable Side Connectors .....                                    | 48 |
| 8.3      | Precautions for Wiring .....                                   | 49 |
| 8.3.1    | Wiring to Power Connectors and Terminal Blocks .....           | 49 |
| 8.3.1.1  | Size A, B 100 V/200 V .....                                    | 49 |
| 8.3.1.2  | Size C, D 100 V/200 V .....                                    | 50 |
| 8.3.1.3  | Size E 200 V .....                                             | 51 |
| 8.3.1.4  | Size F 200 V .....                                             | 52 |
| 8.3.1.5  | Size G 200 V .....                                             | 53 |
| 8.3.1.6  | Size H 200 V .....                                             | 55 |
| 8.3.1.7  | Size E, D 400 V .....                                          | 57 |
| 8.3.1.8  | Size F 400 V .....                                             | 58 |
| 8.3.1.9  | Precautions .....                                              | 59 |
| 8.3.1.10 | How to wire to the power connector .....                       | 61 |
| 8.3.2    | Wiring to Connector X4 .....                                   | 62 |
| 8.3.2.1  | Control input .....                                            | 62 |
| 8.3.2.2  | Control output .....                                           | 63 |
| 8.3.2.3  | Analog Signal Input .....                                      | 64 |
| 8.3.2.4  | Pulse Train Command .....                                      | 65 |
| 8.3.2.5  | Encoder Output Signal/Position Compare Output Signal .....     | 67 |
| 8.3.3    | Wiring to Connector X5 .....                                   | 68 |
| 8.3.4    | Wiring to Connector X6 .....                                   | 69 |
| 8.3.4.1  | If not using multi-turn data .....                             | 69 |
| 8.3.4.2  | Using multi-turn data .....                                    | 72 |
| 8.3.4.3  | Precautions for absolute encoder battery usage .....           | 75 |
| 8.4      | Dynamic Brake .....                                            | 76 |
| 8.5      | Mounting Direction and Spacing .....                           | 77 |
| 9        | Compliance with International Standards .....                  | 78 |
| 9.1      | List of Compliance Standards for Servo Drivers .....           | 78 |
| 9.2      | EU directives and UK regulations .....                         | 79 |
| 9.2.1    | Compliance with the EU EMC directive/UK EMC regulation .....   | 79 |
| 9.2.2    | Compliance with EN 61800-5-1:2007/A11:2021 .....               | 79 |
| 9.3      | Configuration of Peripheral Devices .....                      | 81 |
| 9.3.1    | Installation Environment .....                                 | 81 |
| 9.3.2    | Power Supply .....                                             | 83 |
| 9.3.3    | Molded Case Circuit Breaker (MCCB) .....                       | 83 |
| 9.3.4    | Noise Filter .....                                             | 83 |
| 9.3.5    | Surge Absorber .....                                           | 83 |
| 9.3.6    | Ferrite Core .....                                             | 83 |
| 9.3.7    | Grounding .....                                                | 83 |

|                                                                     |    |
|---------------------------------------------------------------------|----|
| 9.4 List of Peripheral Devices Applicable to the Servo Driver ..... | 84 |
| 9.5 Compliance with UL Standards.....                               | 86 |
| 9.6 Radio Waves Act (South Korea) .....                             | 86 |
| 9.7 Compliance with the SEMI F47 Standard .....                     | 87 |
| 9.8 Harmonic Suppression Measures.....                              | 87 |
| 10 SAFETY PRECAUTIONS .....                                         | 88 |
| 11 Life span .....                                                  | 92 |
| 11.1 Expected Life span of Servo Driver.....                        | 92 |
| 11.2 Standard Life span .....                                       | 92 |
| 12 Warranty.....                                                    | 93 |
| 12.1 Warranty Period .....                                          | 93 |
| 12.2 Warranty Coverage.....                                         | 93 |
| 12.3 Warranty Service .....                                         | 93 |
| 13 Network Security .....                                           | 94 |
| 14 Additional Precautions .....                                     | 95 |
| 15 Model Specifications .....                                       | 96 |
| Appendix List of Default Parameters                                 |    |

## 1 Scope of Application

This specification relates to the MINAS A6S Series for Rotary motor of AC Servo Drivers manufactured by Motion Control Business Unit, Industrial Device Business Division, Panasonic Industry Co., Ltd.

This product is intended for use as industrial equipment. It must not be used for any other purpose (e.g., for home use).

### ■ Related Materials

Technical Reference Document - Basic Function Specifications - : SX-DSV03031

Modbus Communication and Block Operation Specification : SX-DSV03042

\* Please refer to the Panasonic website for the above documents.

### ■ Precautions


- 1 Reproduction of the contents of this document in whole or in part is strictly prohibited.
- 2 Due to product improvements, this document is subject to change without notice.
- 3 This product makes use of open-source software (OSS).

Please refer to the technical documentation for details.

Your company may also have an obligation to use OSS, so please take appropriate measures at your company.

## 2 How to Read Product Numbers

Product numbers are to be read as follows:

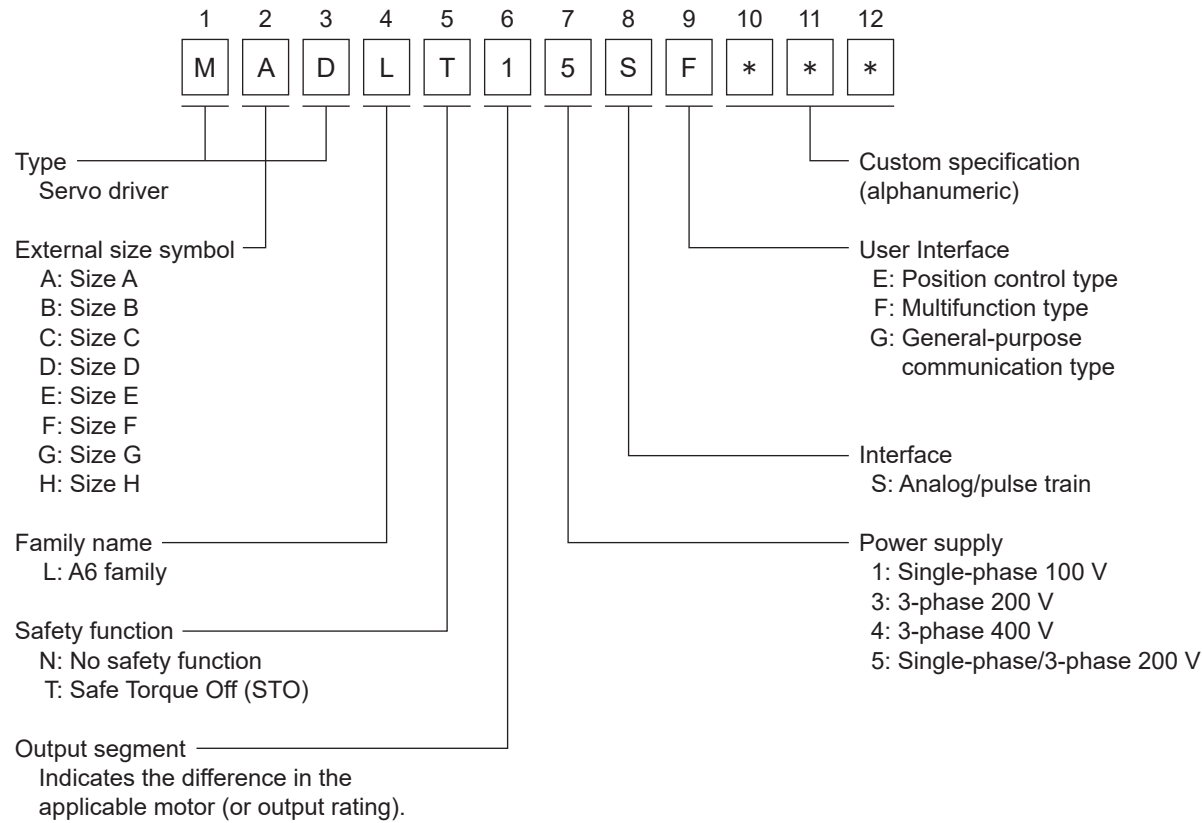

### 3 Product Line-up

#### 3.1 Position control type

| Product number | Size symbol | Power supply input                  | Rated output of applicable motor |
|----------------|-------------|-------------------------------------|----------------------------------|
| MADLN01SE      | A           | Single-phase AC100-120 V            | Max 50 W                         |
| MADLN11SE      |             |                                     | Max 100 W                        |
| MADLN05SE      |             | Single-phase or 3-phase AC200-240 V | Max 100 W                        |
| MADLN15SE      |             |                                     | Max 200 W                        |
| MBDLN21SE      | B           | Single-phase AC100-120 V            | Max 200 W                        |
| MBDLN25SE      |             | Single-phase or 3-phase AC200-240 V | Max 400 W                        |
| MCDLN31SE      | C           | Single-phase AC100-120 V            | Max 400 W                        |
| MCDLN35SE      |             | Single-phase or 3-phase AC200-240 V | Max 750 W                        |
| MDDL45SE       | D           | Single-phase or 3-phase AC200-240 V | Max 1000 W                       |
| MDDL55SE       |             |                                     | Max 1500 W                       |
| MEDLN83SE      | E           | 3-phase AC200-240 V                 | Max 2000 W                       |
| MEDLN93SE      |             |                                     | Max 2400 W                       |
| MFDLNA3SE      | F           | 3-phase AC200-240 V                 | Max 3000 W                       |
| MFDLNB3SE      |             |                                     | Max 5000 W                       |

\* Some motors may not be used with the combinations shown in this table. For details on servo driver and motor combinations, refer to the MINAS A6S Series for Rotary motor catalog.

\* The position control type is not compatible with size G and size H 400 V models.

### 3.2 General-purpose communication type

| Product number | Size symbol | Power supply input                  | Rated output of applicable motor |
|----------------|-------------|-------------------------------------|----------------------------------|
| MADLN01SG      | A           | Single-phase AC100-120 V            | Max 50 W                         |
| MADLN11SG      |             |                                     | Max 100 W                        |
| MADLN05SG      |             | Single-phase or 3-phase AC200-240 V | Max 100 W                        |
| MADLN15SG      |             |                                     | Max 200 W                        |
| MBDLN21SG      | B           | Single-phase AC100-120 V            | Max 200 W                        |
| MBDLN25SG      |             | Single-phase or 3-phase AC200-240 V | Max 400 W                        |
| MCDLN31SG      | C           | Single-phase AC100-120 V            | Max 400 W                        |
| MCDLN35SG      |             | Single-phase or 3-phase AC200-240 V | Max 750 W                        |
| MDDL45SG       | D           | Single-phase or 3-phase AC200-240 V | Max 1000 W                       |
| MDDL55SG       |             |                                     | Max 1500 W                       |
| MEDLN83SG      | E           | 3-phase AC200-240 V                 | Max 2000 W                       |
| MEDLN93SG      |             |                                     | Max 2400 W                       |
| MFDLNA3SG      | F           | 3-phase AC200-240 V                 | Max 3000 W                       |
| MFDLNB3SG      |             |                                     | Max 5000 W                       |

\* Some motors may not be used with the combinations shown in this table. For details on servo driver and motor combinations, refer to the MINAS A6S Series for Rotary motor catalog.

\* The position control type is not compatible with size G and size H 400 V models.

### 3.3 Multifunction type

| Product number | Size symbol | Power supply input                  | Rated output of applicable motor |
|----------------|-------------|-------------------------------------|----------------------------------|
| MADLT01SF      | A           | Single-phase AC100-120 V            | Max 50 W                         |
| MADLT11SF      |             |                                     | Max 100 W                        |
| MADLT05SF      |             | Single-phase or 3-phase AC200-240 V | Max 100 W                        |
| MADLT15SF      |             |                                     | Max 200 W                        |
| MBDLT21SF      | B           | Single-phase AC100-120 V            | Max 200 W                        |
| MBDLT25SF      |             | Single-phase or 3-phase AC200-240 V | Max 400 W                        |
| MCDLT31SF      | C           | Single-phase AC100-120 V            | Max 400 W                        |
| MCDLT35SF      |             | Single-phase or 3-phase AC200-240 V | Max 750 W                        |
| MDDL45SF       | D           | Single-phase or 3-phase AC200-240 V | Max 1000 W                       |
| MDDL55SF       |             |                                     | Max 1500 W                       |
| MEDLT83SF      | E           | 3-phase AC200-240 V                 | Max 2000 W                       |
| MEDLT93SF      |             |                                     | Max 2400 W                       |
| MFDLTA3SF      | F           | 3-phase AC200-240 V                 | Max 3000 W                       |
| MFDLTB3SF      |             |                                     | Max 5000 W                       |
| MGDLTC3SF      | G           | 3-phase AC200-240 V                 | Max 7500 W                       |
| MHDLTE3SF      | H           | 3-phase AC200-240 V                 | Max 15000 W                      |
| MHDLTF3SF      |             |                                     | Max 22000 W                      |
| MDDL44SF       | D           | 3-phase AC380-480 V (*1)            | Max 600 W                        |
| MDDL54SF       |             |                                     | Max 1000 W                       |
| MDDL64SF       |             |                                     | Max 1500 W                       |
| MEDLT84SF      | E           | 3-phase AC380-480 V (*1)            | Max 2000 W                       |
| MFDLTA4SF      | F           | 3-phase AC380-480 V (*1)            | Max 3000 W                       |
| MFDLTB4SF      |             |                                     | Max 5000 W                       |

\*1 TN (ground the neutral point to earth)

- \* Some motors may not be used with the combinations shown in this table. For details on servo driver and motor combinations, refer to the MINAS A6S Series for Rotary motor catalog.
- \* All motors with input power 400 V drivers and some motors with input power 200 V drivers use a Chinese-made rare earth magnet.

The patent licensor has imposed certain restrictions on the regions in which these magnets can be distributed.

To avoid infringement of the licensing terms, do not carry the motor into Japan or into another country via Japan, either by itself or as part of set.

## 4 Specifications

| Item                                    |            |                              |           | Description                                                                                                                                                                     |
|-----------------------------------------|------------|------------------------------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input power supply                      | 100 V type | Main circuit power supply    |           | Single-phase 100–120 V, -15% to +10%, 50/60 Hz                                                                                                                                  |
|                                         |            | Control circuit power supply |           | Single-phase 100–120 V, -15% to +10%, 50/60 Hz                                                                                                                                  |
|                                         | 200 V type | Main circuit power supply    | Sizes A–D | Single-phase or 3-phase 200–240 V, -15% to +10%, 50/60 Hz                                                                                                                       |
|                                         |            |                              | Sizes E–H | 3-phase 200–240 V, -15% to +10%, 50/60 Hz                                                                                                                                       |
|                                         |            | Control circuit power supply | Sizes A–D | Single-phase 200–240 V, -15% to +10%, 50/60 Hz                                                                                                                                  |
|                                         |            |                              | Sizes E–H | Single-phase 200–240 V, -15% to +10%, 50/60 Hz                                                                                                                                  |
|                                         | 400 V type | Main circuit power supply    |           | 3-phase 380Y/220-480Y/277 V, -15% to +10%, 50/60 Hz<br>TN (ground the neutral point to earth)                                                                                   |
|                                         |            | Control circuit power supply |           | DC 24 V, ±15 %                                                                                                                                                                  |
| Ambient operating conditions            |            | Temperature                  |           | Operating temperature: 0–55°C (no freezing)<br>Storage temperature: -20°C to 65°C (Max. temperature guarantee: 80°C, 72 hours, no condensation <sup>(*)</sup> )                 |
|                                         |            | Humidity                     |           | Operating/storage humidity: 20–85% RH or less (no condensation <sup>(*)</sup> )                                                                                                 |
|                                         |            | Elevation                    |           | 1,000 m or less above sea level                                                                                                                                                 |
|                                         |            | Vibration                    |           | 5.88 m/s <sup>2</sup> or less, 10–60 Hz                                                                                                                                         |
|                                         |            | Pollution degree             |           | Pollution degree 2                                                                                                                                                              |
| Insulation voltage resistance           |            |                              |           | Withstanding AC 1,500 V between primary and ground for 1 minute                                                                                                                 |
| Control method                          |            |                              |           | IGBT PWM method, sinusoidal drive                                                                                                                                               |
| Encoder feedback                        |            |                              |           | 23-bit (8388608 resolution), 7-wire serial absolute encoder                                                                                                                     |
| External scale feedback <sup>(*)2</sup> |            |                              |           | A/B phase, homing signal differential input type<br>Panasonic supported serial communication type <sup>(*)3</sup>                                                               |
| Control signal                          |            | Input                        |           | 10 general inputs<br>Select general input function based on parameters                                                                                                          |
|                                         |            | Output                       |           | 6 general outputs<br>Select general input function based on parameters                                                                                                          |
| Analog signal                           |            | Input <sup>(*)2</sup>        |           | Three inputs (one 16-bit A/D input, two 12-bit A/D inputs)                                                                                                                      |
|                                         |            | Output                       |           | 2 outputs (analog monitor 1, analog monitor 2)                                                                                                                                  |
| Pulse signal                            |            | Input                        |           | Two inputs<br>Supports both line driver I/F and open collector I/F via photocoupler input<br>Supports line driver I/F via line receiver input                                   |
|                                         |            | Output                       |           | Four outputs<br>Line driver output for encoder pulses (A/B/Z signal) or external feedback pulses (EXA/EXB/EXZ signal) open collector output also available for Z or EXZ signal. |
| Communication function                  |            | USB                          |           | Connect to a computer for parameter setting or status monitoring, etc.                                                                                                          |
|                                         |            | RS232 <sup>(*)4</sup>        |           | 1:1 communication                                                                                                                                                               |
|                                         |            | RS485 <sup>(*)4</sup>        |           | 1:n communication (up to 31 axes)                                                                                                                                               |
|                                         |            | Modbus-RTU <sup>(*)4</sup>   |           | 1:1 communication with upper controller (with RS232 connection)<br>1:N communication (with RS485 connection) is possible                                                        |

| Item                 | Description                                                                                                                                                                                                                                                                           |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety terminal (*2) | Connector for functional safety                                                                                                                                                                                                                                                       |
| Front panel          | (1) Five buttons (2) 6-digit LED                                                                                                                                                                                                                                                      |
| Regeneration         | Sizes A, B, G, H: No built-in regenerative resistor (external only)<br>Sizes C–F: Built-in regenerative resistor (external also possible)                                                                                                                                             |
| Dynamic brake        | Sizes A–G: Built-in / Size H: External only                                                                                                                                                                                                                                           |
| Control mode         | It is possible to switch between the following seven modes using parameters:<br>(1) Position control<br>(2) Internal velocity control<br>(3) Torque control<br>(4) Position/velocity control<br>(5) Position/torque control<br>(6) Velocity/torque control<br>(7) Full-closed control |

\*1 Please note that condensation tends occur when the temperature drops.

\*2 Cannot be used with general-purpose communication type or position control type.

\*3 Please refer to the collaboration catalog for the corresponding scale manufacturer and part number.

\*4 Cannot be used with general-purpose communication type or position control type.

\* For details of each specification, refer to Technical Reference - Functional Specification -.

\* For details of the Modbus communication function and block operation function, refer to technical documentation (Modbus Communication and Block Operation Specification).


## 5 Appearance and Part Names

For each size, the figure is of a multifunction type.

The position control type does not have X2 (serial bus connector), X3 (connector for safety functions/safety bypass plug), or X5 (external scale connector).

The general-purpose communication type does not have X3 (connector for safety functions/safety bypass plug) or X5 (external scale connector).


### 5.1 Size A, B 100 V/200 V

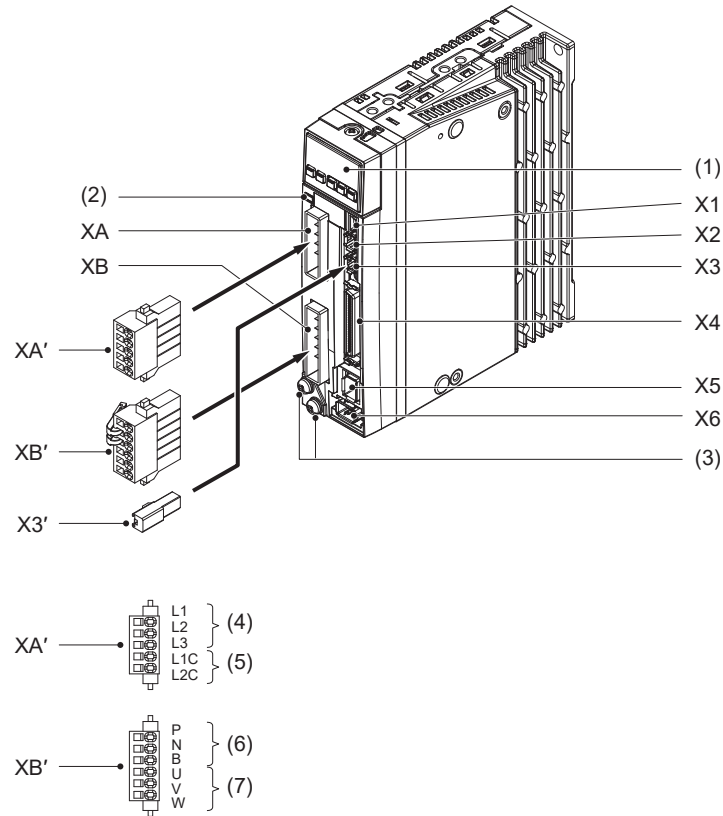

|     |                                                                  |     |                                                                     |
|-----|------------------------------------------------------------------|-----|---------------------------------------------------------------------|
| X1  | USB connector<br>UB-M5BR-S14-4S (LF) (SN) (JST) equivalent       | X2  | Serial bus connector<br>CIF-HS08SS-072-TB (LF) (JST) equivalent     |
| X3  | Safety function connector<br>CIF-HS08SK-071-TB (LF) equivalent   | X3' | Safety bypass plug<br>CIF-PB08AK-GF1R (JST)                         |
| X4  | Parallel I/O connector<br>DF02R050NA2 (JAE) equivalent           | X5  | External scale connector<br>MUF-RS10SK-GKX-TB (LF) (JST) equivalent |
| X6  | Encoder connector<br>3E106-2230KV (3M) equivalent                |     |                                                                     |
| XA  | Power supply input connector<br>S05B-F32SK-GGXR (JST) equivalent | XA' | Power supply input connector<br>05JFAT-SAXGGKK-A (JST) equivalent   |
| XB  | Motor output connector<br>S06B-F32SK-GGXR (JST) equivalent       | XB' | Motor output connector<br>06JFAT-SAXGGKK-A (JST) equivalent         |
| (1) | Front panel                                                      | (2) | Charge lamp                                                         |
| (3) | Ground connection screw                                          | (4) | Main power supply input terminal                                    |
| (5) | Control power supply input terminal                              | (6) | Regenerative resistor connection terminal                           |
| (7) | Motor output terminal                                            |     |                                                                     |

\* Remove the safety bypass plug when wiring to X3.


## 5.2 Size C, D 100 V/200 V

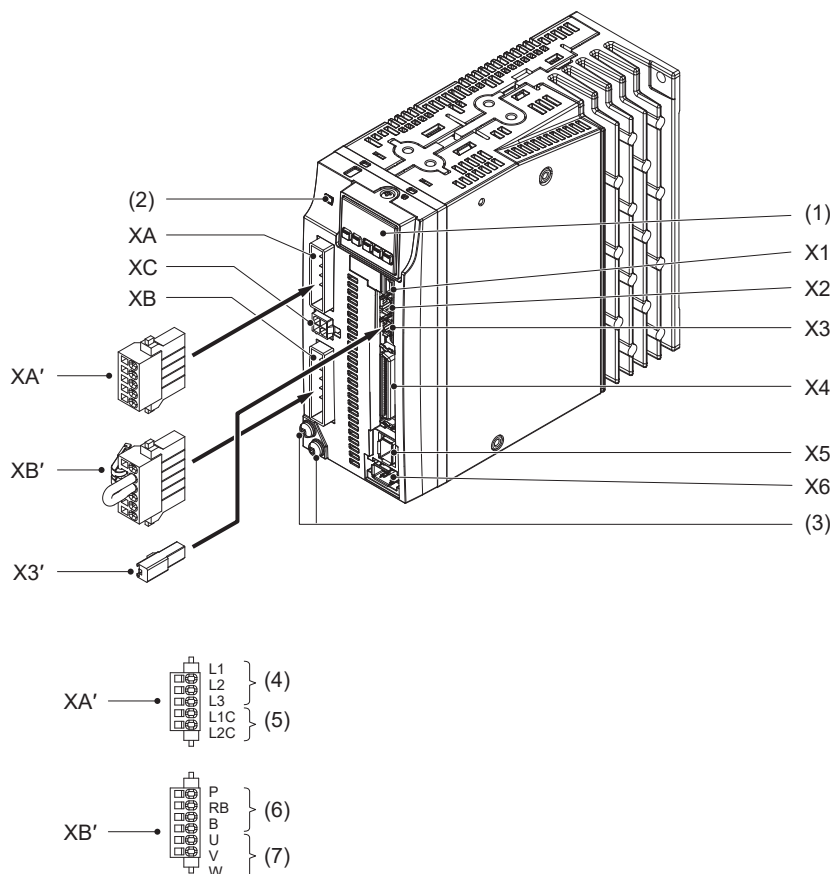

|     |                                                                  |     |                                                                     |
|-----|------------------------------------------------------------------|-----|---------------------------------------------------------------------|
| X1  | USB connector<br>UB-M5BR-S14-4S (LF) (SN) (JST) equivalent       | X2  | Serial bus connector<br>CIF-HS08SS-072-TB (LF) (JST) equivalent     |
| X3  | Safety function connector<br>CIF-HS08SK-071-TB (LF) equivalent   | X3' | Safety bypass plug<br>CIF-PB08AK-GF1R (JST)                         |
| X4  | Parallel I/O connector<br>DF02R050NA2 (JAE) equivalent           | X5  | External scale connector<br>MUF-RS10SK-GKX-TB (LF) (JST) equivalent |
| X6  | Encoder connector<br>3E106-2230KV (3M) equivalent                |     |                                                                     |
| XA  | Power supply input connector<br>S05B-F32SK-GGXR (JST) equivalent | XA' | Power supply input connector<br>05JFAT-SAXGGKK-A (JST) equivalent   |
| XB  | Motor output connector<br>S06B-F32SK-GGXR (JST) equivalent       | XB' | Motor output connector<br>06JFAT-SAXGGKK-A (JST) equivalent         |
| XC  | Manufacturer use<br>(Do not connect anything to this connector)  | (1) | Front panel                                                         |
| (2) | Charge lamp                                                      | (3) | Ground connection screw                                             |
| (4) | Main power supply input terminal                                 | (5) | Control power supply input terminal                                 |
| (6) | Regenerative resistor connection terminal                        | (7) | Motor output terminal                                               |

\* Remove the safety bypass plug when wiring to X3.


### 5.3 Size E 200 V

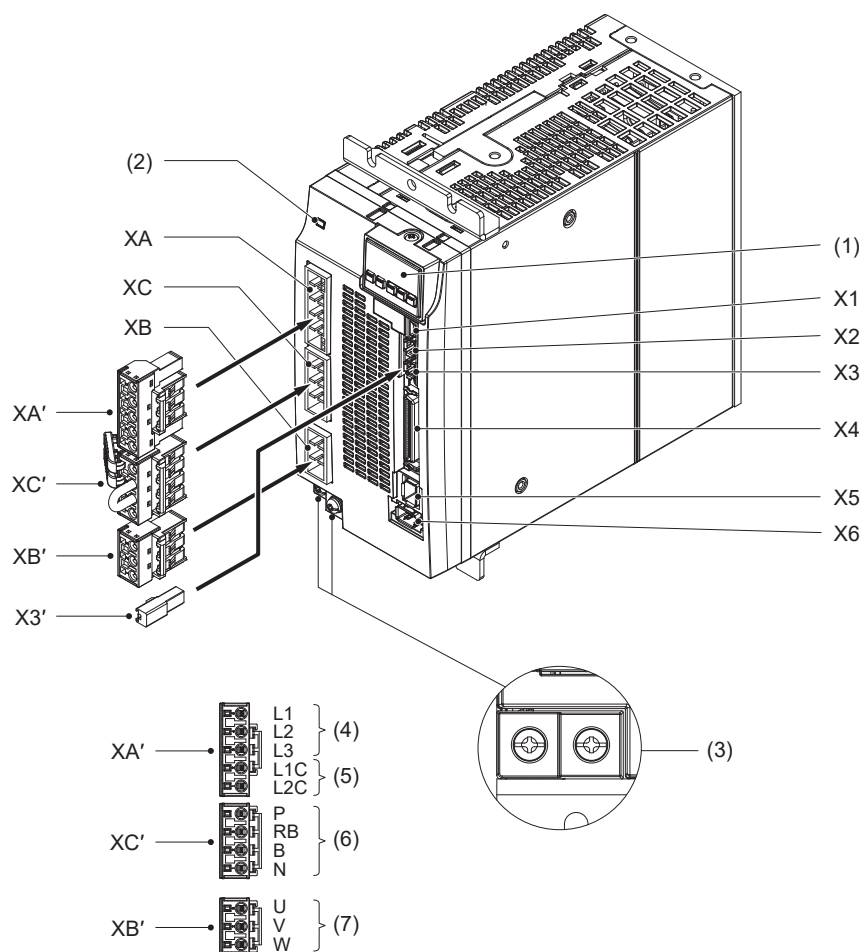

|     |                                                                        |     |                                                                     |
|-----|------------------------------------------------------------------------|-----|---------------------------------------------------------------------|
| X1  | USB connector<br>UB-M5BR-S14-4S (LF) (SN) (JST) equivalent             | X2  | Serial bus connector<br>CIF-HS08SS-072-TB (LF) (JST) equivalent     |
| X3  | Safety function connector<br>CIF-HS08SK-071-TB (LF) equivalent         | X3' | Safety bypass plug<br>CIF-PB08AK-GF1R (JST)                         |
| X4  | Parallel I/O connector<br>DF02R050NA2 (JAE) equivalent                 | X5  | External scale connector<br>MUF-RS10SK-GKX-TB (LF) (JST) equivalent |
| X6  | Encoder connector<br>3E106-2230KV (3M) equivalent                      |     |                                                                     |
| XA  | Power supply input connector<br>S05B-JTSLSK-GSANXR (JST) equivalent    | XA' | Power supply input connector<br>05JFAT-SAXGSA-L (JST) equivalent    |
| XB  | Motor output connector<br>S03B-JTSLSK-GSANXR (JST) equivalent          | XB' | Motor output connector<br>03JFAT-SAXGSA-L (JST) equivalent          |
| XC  | Regenerative resistor connector<br>S04B-JTSLSS-GSANXR (JST) equivalent | XC' | Regenerative resistor connector<br>04JFAT-SAXGSA-L (JST) equivalent |
| (1) | Front panel                                                            | (2) | Charge lamp                                                         |
| (3) | Ground connection screw                                                | (4) | Main power supply input terminal                                    |
| (5) | Control power supply input terminal                                    | (6) | Regenerative resistor connection terminal                           |
| (7) | Motor output terminal                                                  |     |                                                                     |

\* Remove the safety bypass plug when wiring to X3.


## 5.4 Size F 200 V

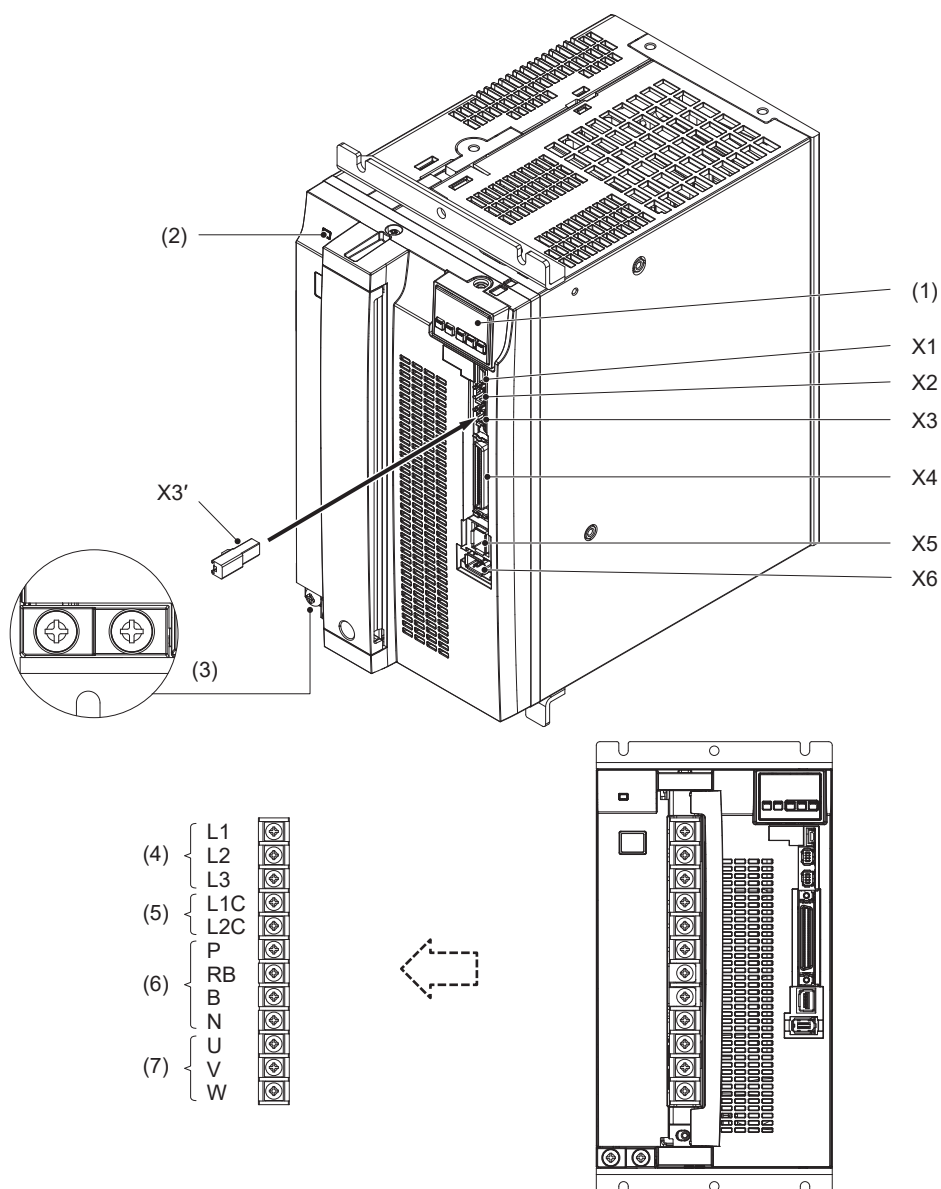

|     |                                                                |     |                                                                                  |
|-----|----------------------------------------------------------------|-----|----------------------------------------------------------------------------------|
| X1  | USB connector<br>UB-M5BR-S14-4S (LF) (SN) (JST) equivalent     | X2  | Serial bus connector<br>CIF-HS08SS-072-TB (LF) (JST) equivalent                  |
| X3  | Safety function connector<br>CIF-HS08SK-071-TB (LF) equivalent | X3' | Safety bypass plug<br>CIF-PB08AK-GF1R (JST)                                      |
| X4  | Parallel I/O connector<br>DF02R050NA2 (JAE) equivalent         | X5  | External scale connector<br>MUF-RS10SK-GKX-TB (LF) (JST) equivalent              |
| X6  | Encoder connector<br>3E106-2230KV (3M) equivalent              |     |                                                                                  |
| (1) | Front panel                                                    | (2) | Charge lamp                                                                      |
| (3) | Ground connection screw                                        | (4) | Main power supply input terminal                                                 |
| (5) | Control power supply input terminal                            | (6) | Regenerative resistor connection terminal (Normally, short circuit between RB-B) |
| (7) | Motor output terminal                                          |     |                                                                                  |

\* Remove the safety bypass plug when wiring to X3.


5.5 Size G 200 V

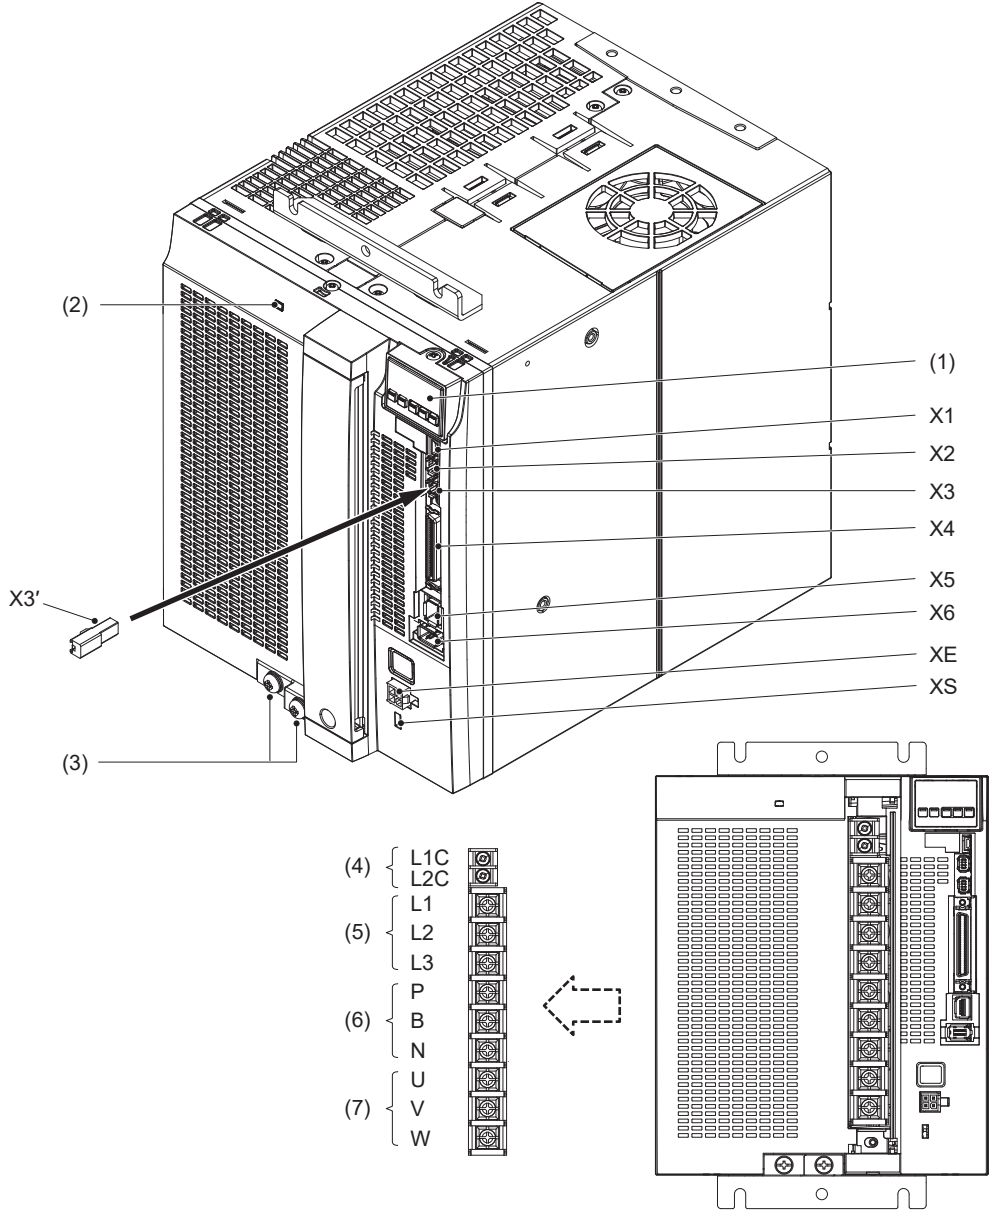

|     |                                                                |     |                                                                     |
|-----|----------------------------------------------------------------|-----|---------------------------------------------------------------------|
| X1  | USB connector<br>UB-M5BR-S14-4S (LF) (SN) (JST) equivalent     | X2  | Serial bus connector<br>CIF-HS08SS-072-TB (LF) (JST) equivalent     |
| X3  | Safety function connector<br>CIF-HS08SK-071-TB (LF) equivalent | X3' | Safety bypass plug<br>CIF-PB08AK-GF1R (JST)                         |
| X4  | Parallel I/O connector<br>DF02R050NA2 (JAE) equivalent         | X5  | External scale connector<br>MUF-RS10SK-GKX-TB (LF) (JST) equivalent |
| X6  | Encoder connector<br>3E106-2230KV (3M) equivalent              | XE  | External DB signal connector<br>5569-04A2-210 (MOLEX) equivalent    |
| XS  | Internal DB switch                                             | (1) | Front panel                                                         |
| (2) | Charge lamp                                                    | (3) | Ground connection screw                                             |
| (4) | Control power supply input terminal                            | (5) | Main power supply input terminal                                    |
| (6) | Regenerative resistor connection terminal                      | (7) | Motor output terminal                                               |

\* Remove the safety bypass plug when wiring to X3.


## 5.6 Size H 200 V

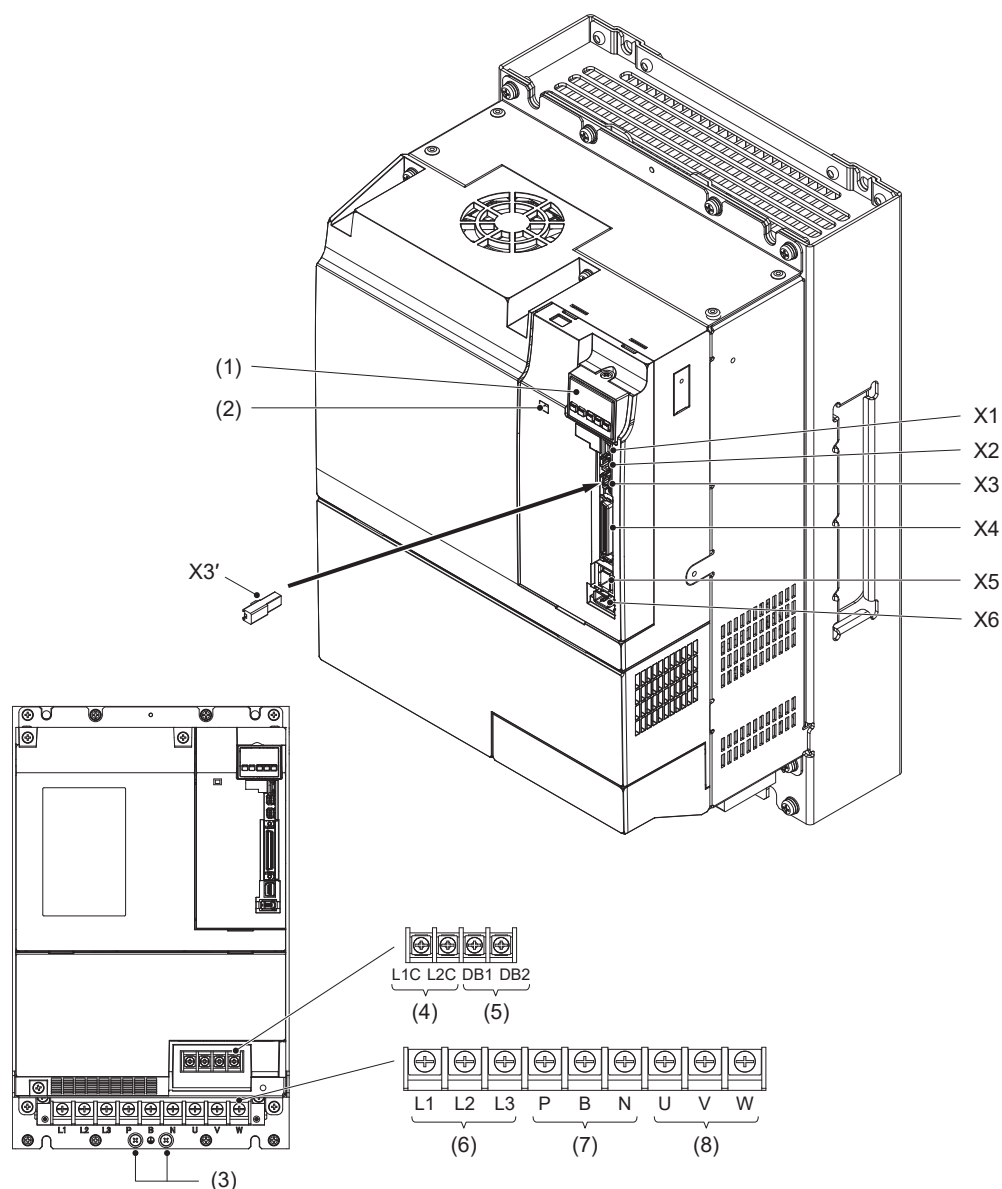

|     |                                                                |     |                                                                     |
|-----|----------------------------------------------------------------|-----|---------------------------------------------------------------------|
| X1  | USB connector<br>UB-M5BR-S14-4S (LF) (SN) (JST) equivalent     | X2  | Serial bus connector<br>CIF-HS08SS-072-TB (LF) (JST) equivalent     |
| X3  | Safety function connector<br>CIF-HS08SK-071-TB (LF) equivalent | X3' | Safety bypass plug<br>CIF-PB08AK-GF1R (JST)                         |
| X4  | Parallel I/O connector<br>DF02R050NA2 (JAE) equivalent         | X5  | External scale connector<br>MUF-RS10SK-GKX-TB (LF) (JST) equivalent |
| X6  | Encoder connector<br>3E106-2230KV (3M) equivalent              |     |                                                                     |
| (1) | Front panel                                                    | (2) | Charge lamp                                                         |
| (3) | Ground connection screw                                        | (4) | Control power supply input terminal                                 |
| (5) | External DB control terminal                                   | (6) | Main power supply input terminal                                    |
| (7) | Regenerative resistor connection terminal                      | (8) | Motor output terminal                                               |

\* Remove the safety bypass plug when wiring to X3.


## 5.7 Size D 400 V

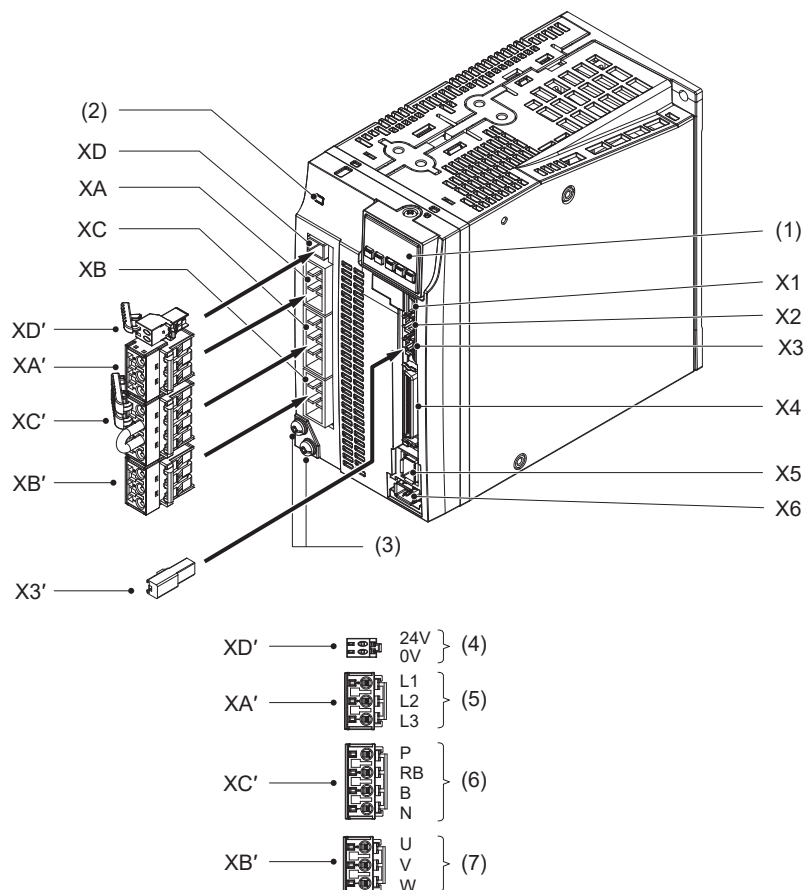

|     |                                                                         |     |                                                                       |
|-----|-------------------------------------------------------------------------|-----|-----------------------------------------------------------------------|
| X1  | USB connector<br>UB-M5BR-S14-4S (LF) (SN) (JST) equivalent              | X2  | Serial bus connector<br>CIF-HS08SS-072-TB (LF) (JST) equivalent       |
| X3  | Safety function connector<br>CIF-HS08SK-071-TB (LF) equivalent          | X3' | Safety bypass plug<br>CIF-PB08AK-GF1R (JST)                           |
| X4  | Parallel I/O connector<br>DF02R050NA2 (JAE) equivalent                  | X5  | External scale connector<br>MUF-RS10SK-GKX-TB (LF) (JST) equivalent   |
| X6  | Encoder connector<br>3E106-2230KV (3M) equivalent                       |     |                                                                       |
| XA  | Power supply input connector<br>S03B-JTSLSS-GSANYR (JST) equivalent     | XA' | Power supply input connector<br>03JFAT-SAYGSA-L (JST) equivalent      |
| XB  | Motor output connector<br>S03B-JTSLSK-GSANXR (JST) equivalent           | XB' | Motor output connector<br>03JFAT-SAXGSA-L (JST) equivalent            |
| XC  | Regenerative resistor connector<br>S04B-JTSLSK-GSANXR (JST) equivalent  | XC' | Regenerative resistor connector<br>04JFAT-SAXGSA-L (JST) equivalent   |
| XD  | Control power supply input connector<br>S02B-J25SK-GGR (JST) equivalent | XD' | Control power supply input connector<br>02MJFAT-SAGF (JST) equivalent |
| (1) | Front panel                                                             | (2) | Charge lamp                                                           |
| (3) | Ground connection screw                                                 | (4) | Control power supply input terminal                                   |
| (5) | Main power supply input terminal                                        | (6) | Regenerative resistor connection terminal                             |
| (7) | Motor output terminal                                                   |     |                                                                       |

\* Remove the safety bypass plug when wiring to X3.


## 5.8 Size E 400 V

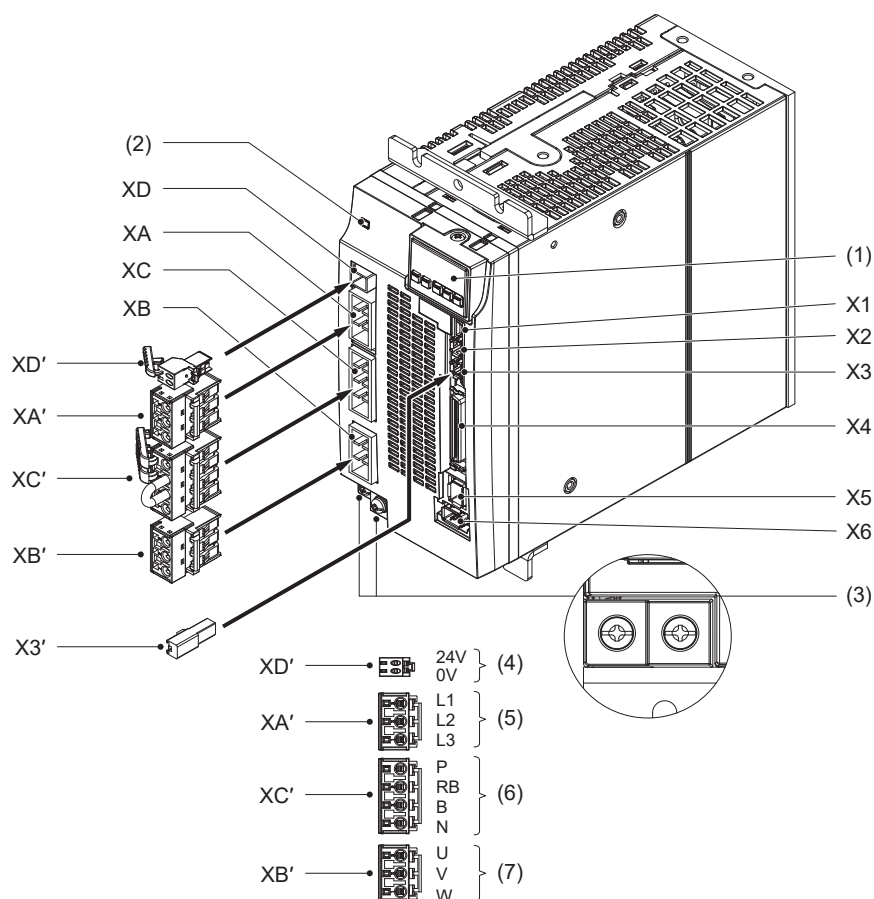

|     |                                                                         |     |                                                                       |
|-----|-------------------------------------------------------------------------|-----|-----------------------------------------------------------------------|
| X1  | USB connector<br>UB-M5BR-S14-4S (LF) (SN) (JST) equivalent              | X2  | Serial bus connector<br>CIF-HS08SS-072-TB (LF) (JST) equivalent       |
| X3  | Safety function connector<br>CIF-HS08SK-071-TB (LF) equivalent          | X3' | Safety bypass plug<br>CIF-PB08AK-GF1R (JST)                           |
| X4  | Parallel I/O connector<br>DF02R050NA2 (JAE) equivalent                  | X5  | External scale connector<br>MUF-RS10SK-GKX-TB (LF) (JST) equivalent   |
| X6  | Encoder connector<br>3E106-2230KV (3M) equivalent                       |     |                                                                       |
| XA  | Power supply input connector<br>S03B-JTSLSS-GSANYR (JST) equivalent     | XA' | Power supply input connector<br>03JFAT-SAYGSA-L (JST) equivalent      |
| XB  | Motor output connector<br>S03B-JTSLSK-GSANXR (JST) equivalent           | XB' | Motor output connector<br>03JFAT-SAXGSA-L (JST) equivalent            |
| XC  | Regenerative resistor connector<br>S04B-JTSLSK-GSANXR (JST) equivalent  | XC' | Regenerative resistor connector<br>04JFAT-SAXGSA-L (JST) equivalent   |
| XD  | Control power supply input connector<br>S02B-J25SK-GGR (JST) equivalent | XD' | Control power supply input connector<br>02MJFAT-SAGF (JST) equivalent |
| (1) | Front panel                                                             | (2) | Charge lamp                                                           |
| (3) | Ground connection screw                                                 | (4) | Control power supply input terminal                                   |
| (5) | Main power supply input terminal                                        | (6) | Regenerative resistor connection terminal                             |
| (7) | Motor output terminal                                                   |     |                                                                       |

\* Remove the safety bypass plug when wiring to X3.


## 5.9 Size F 400 V

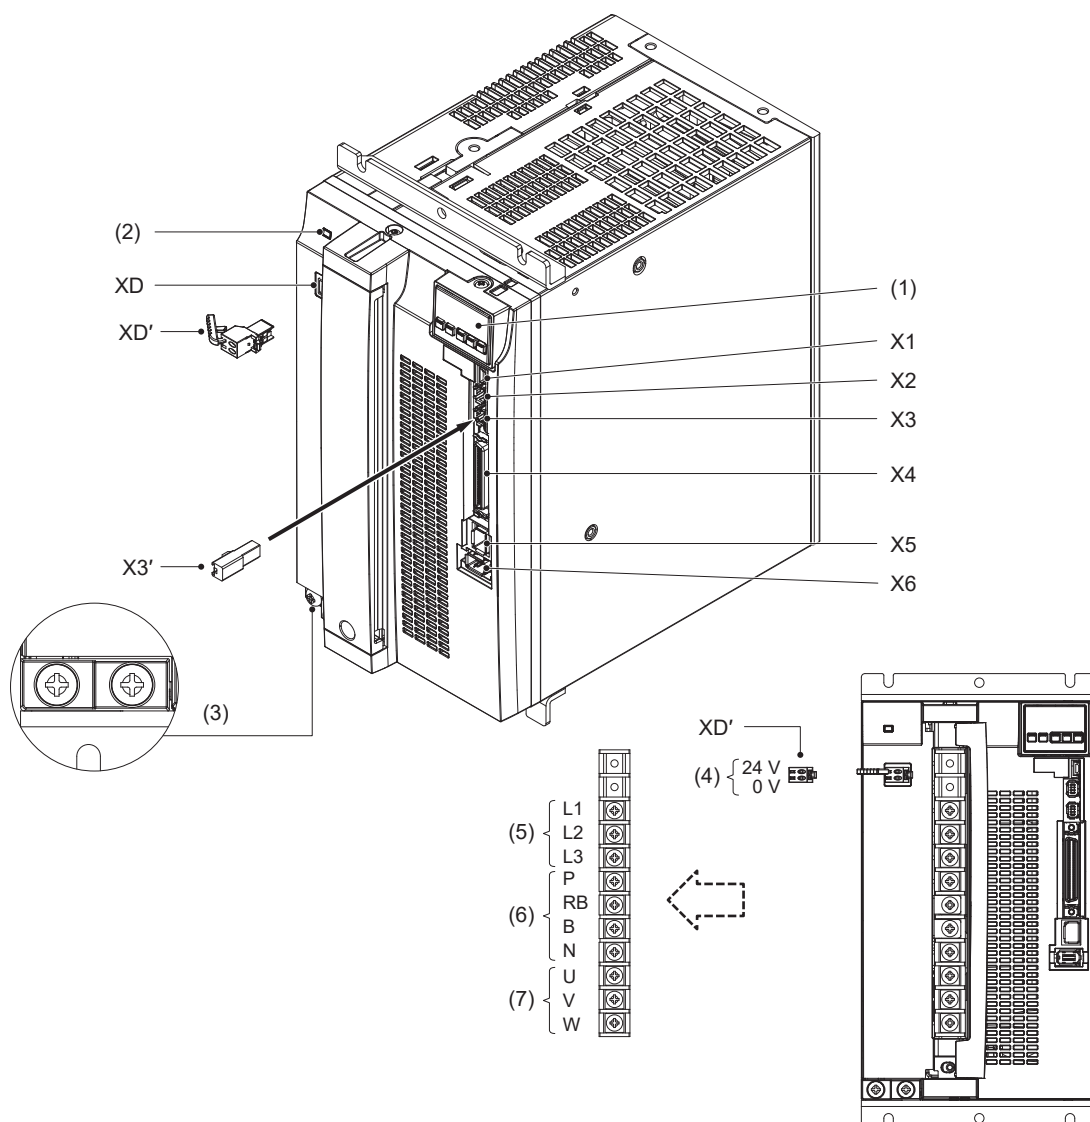

|     |                                                                         |     |                                                                                  |
|-----|-------------------------------------------------------------------------|-----|----------------------------------------------------------------------------------|
| X1  | USB connector<br>UB-M5BR-S14-4S (LF) (SN) (JST) equivalent              | X2  | Serial bus connector<br>CIF-HS08SS-072-TB (LF) (JST) equivalent                  |
| X3  | Safety function connector<br>CIF-HS08SK-071-TB (LF) equivalent          | X3' | Safety bypass plug<br>CIF-PB08AK-GF1R (JST)                                      |
| X4  | Parallel I/O connector<br>DF02R050NA2 (JAE) equivalent                  | X5  | External scale connector<br>MUF-RS10SK-GKX-TB (LF) (JST) equivalent              |
| X6  | Encoder connector<br>3E106-2230KV (3M) equivalent                       |     |                                                                                  |
| XD  | Control power supply input connector<br>S02B-J25SK-GGR (JST) equivalent | XD' | Control power supply input connector<br>02MJFAT-SAGF (JST) equivalent            |
| (1) | Front panel                                                             | (2) | Charge lamp                                                                      |
| (3) | Ground connection screw                                                 | (4) | Control power supply input terminal                                              |
| (5) | Main power supply input terminal                                        | (6) | Regenerative resistor connection terminal (Normally, short circuit between RB-B) |
| (7) | Motor output terminal                                                   |     |                                                                                  |

\* Remove the safety bypass plug when wiring to X3.

5.10 Example nameplate

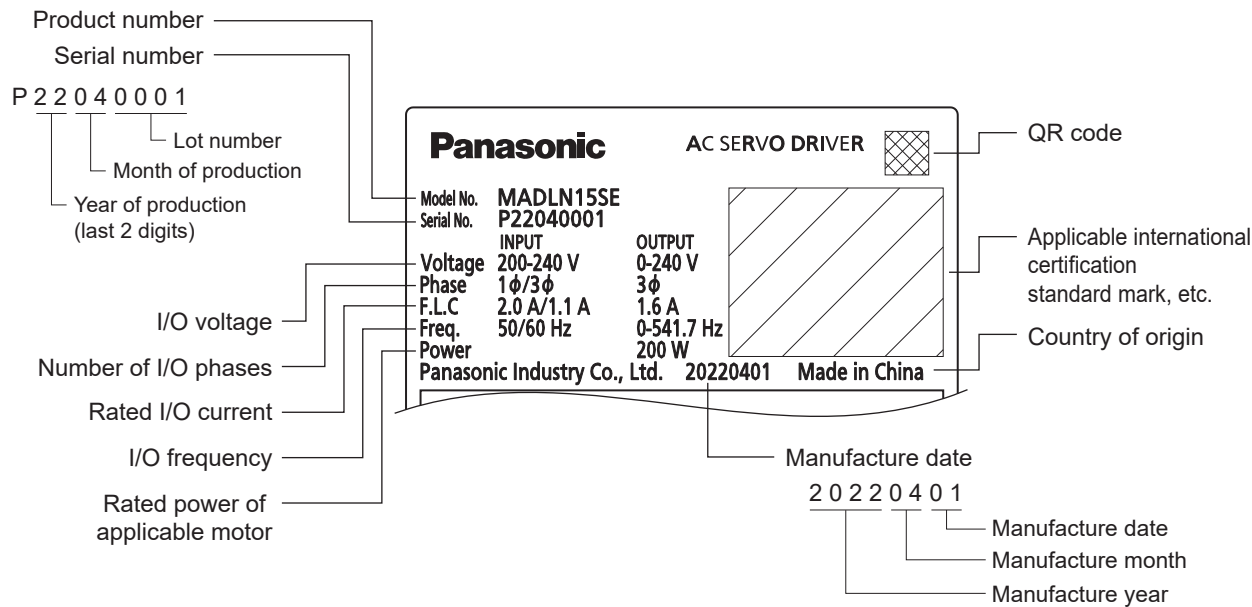


Although serial numbers range from 1 to 33999, they are shown on the name plate in 4-digit format shown as shown below.

The letters “I” and “O” are not used for the fourth digit.

| Value of serial number | Notation on the nameplate |
|------------------------|---------------------------|
| 1 – 9999               | 0001 – 9999               |
| 10000 – 10999          | A000 – A999               |
| 11000 – 11999          | B000 – B999               |
| ⋮                      | ⋮                         |
| 17000 – 17999          | H000 – H999               |
| 18000 – 18999          | J000 – J999               |
| ⋮                      | ⋮                         |
| 22000 – 22999          | N000 – N999               |
| 23000 – 23999          | P000 – P999               |
| ⋮                      | ⋮                         |
| 33000 – 33999          | Z000 – Z999               |

5.11 Front panel

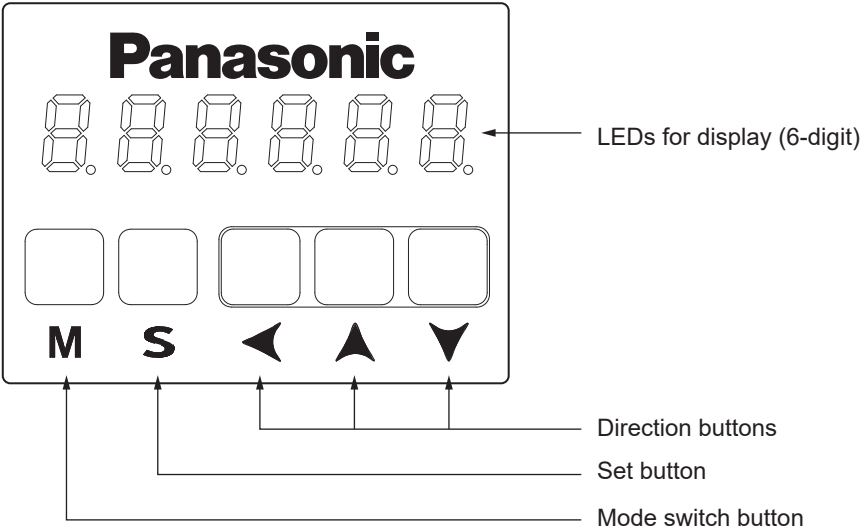


## 6 Dimensions

External dimensions for each frame are the same for the position control type, general-purpose communication type, and multifunction type (multifunction type shown in figure).


Some dimensions for the 400 V model are different (see note).

### 6.1 Size A 100 V/200 V

#### Base-mounted installation (Standard: Rear-mounted)

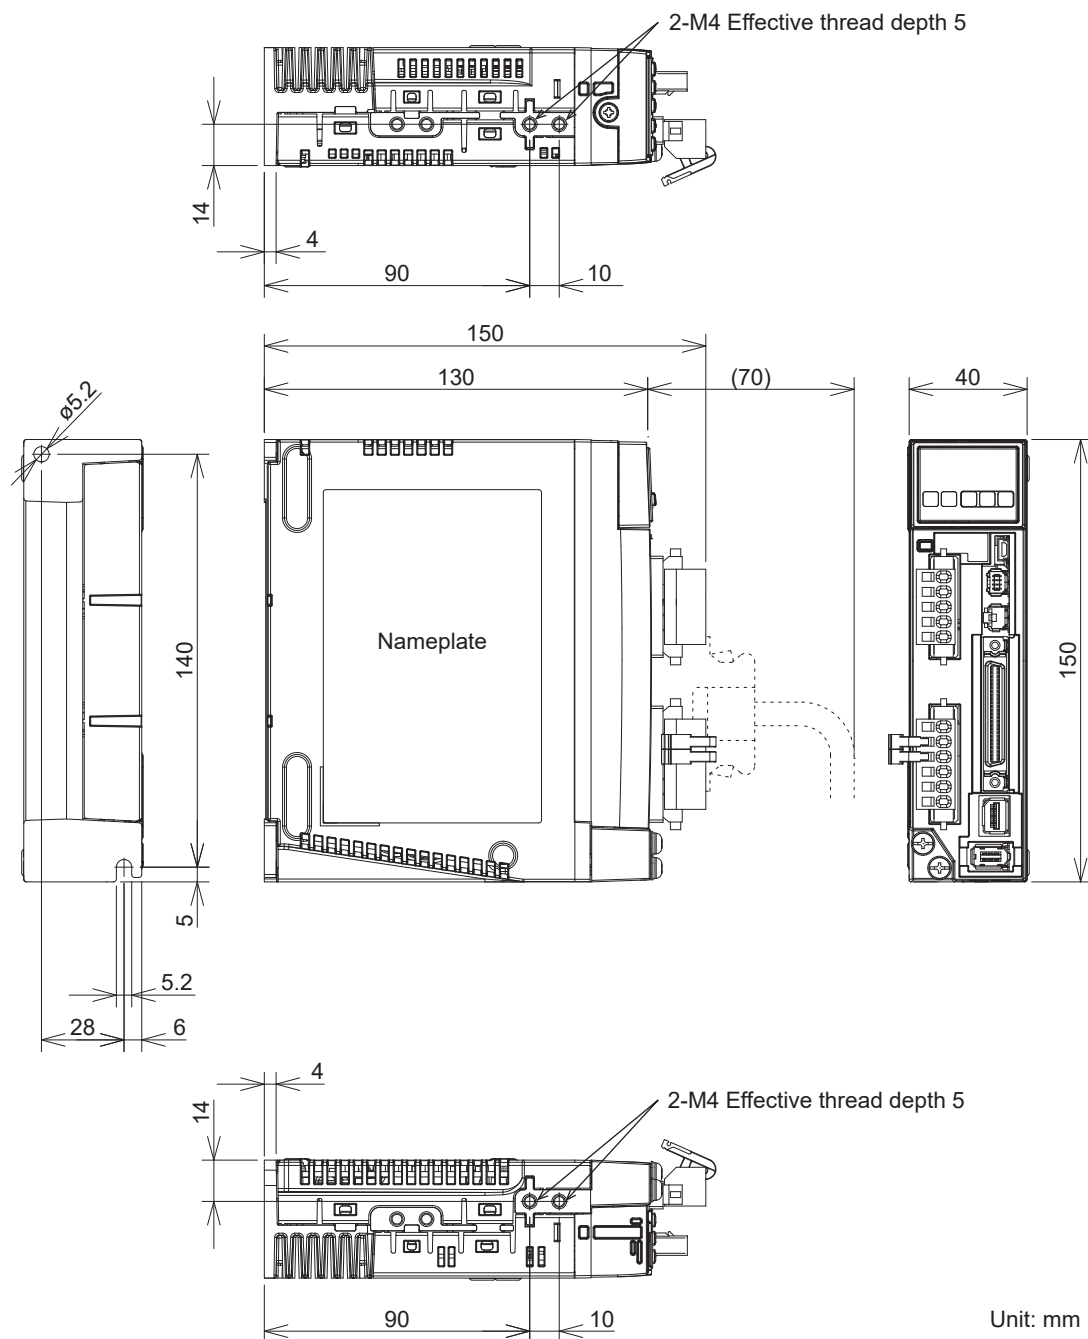

\*1 Do not use screw holes for which no dimensions are shown.

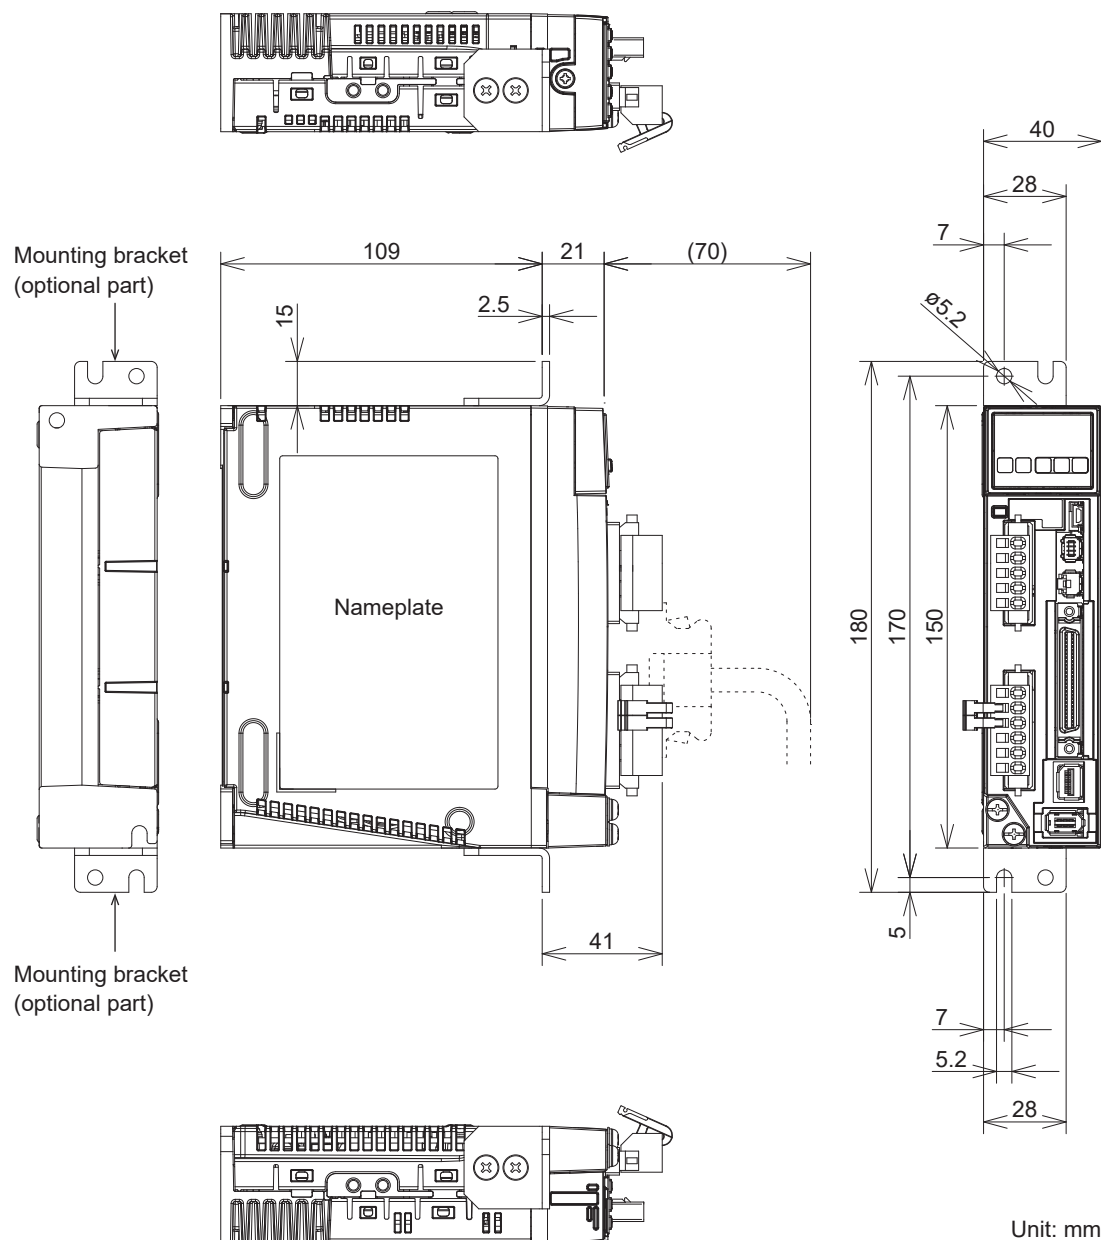
**Rack-mounted installation (Using optional parts: Front-mounted)**

\*1 Do not use screw holes for which no dimensions are shown.

\*2 Mounting brackets are optional parts. They are not included with the product.

## 6.2 Size B 100 V/200 V

### Base-mounted installation (Standard: Rear-mounted)

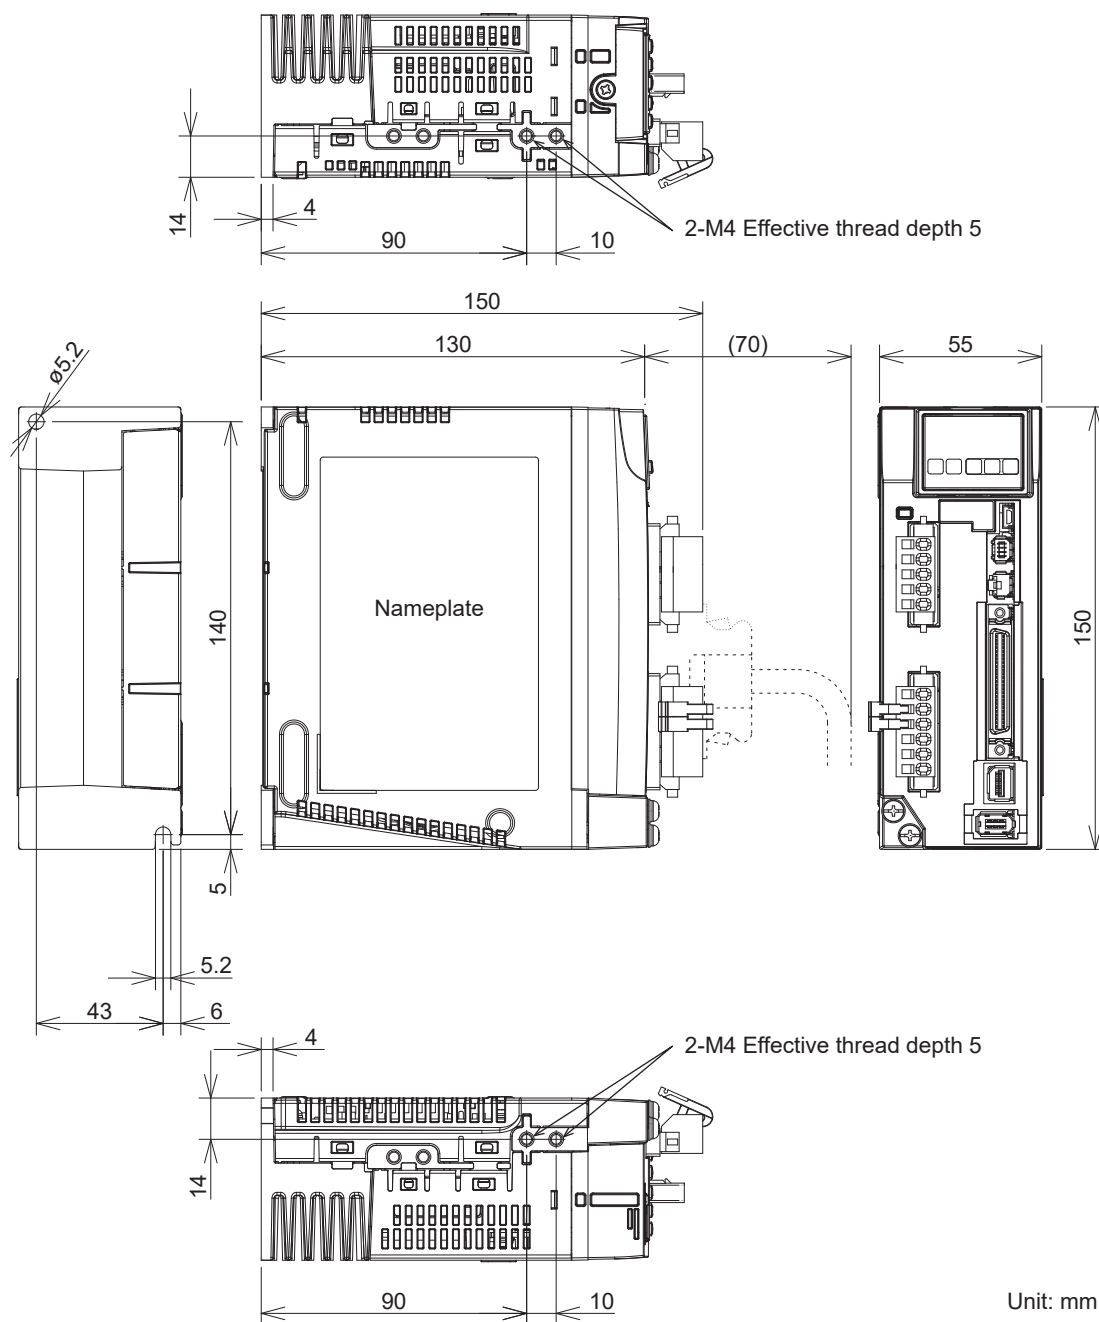


\*1 Do not use screw holes for which no dimensions are shown.




### 6.3 Size C 100 V/200 V

#### Base-mounted installation (Standard: Rear-mounted)

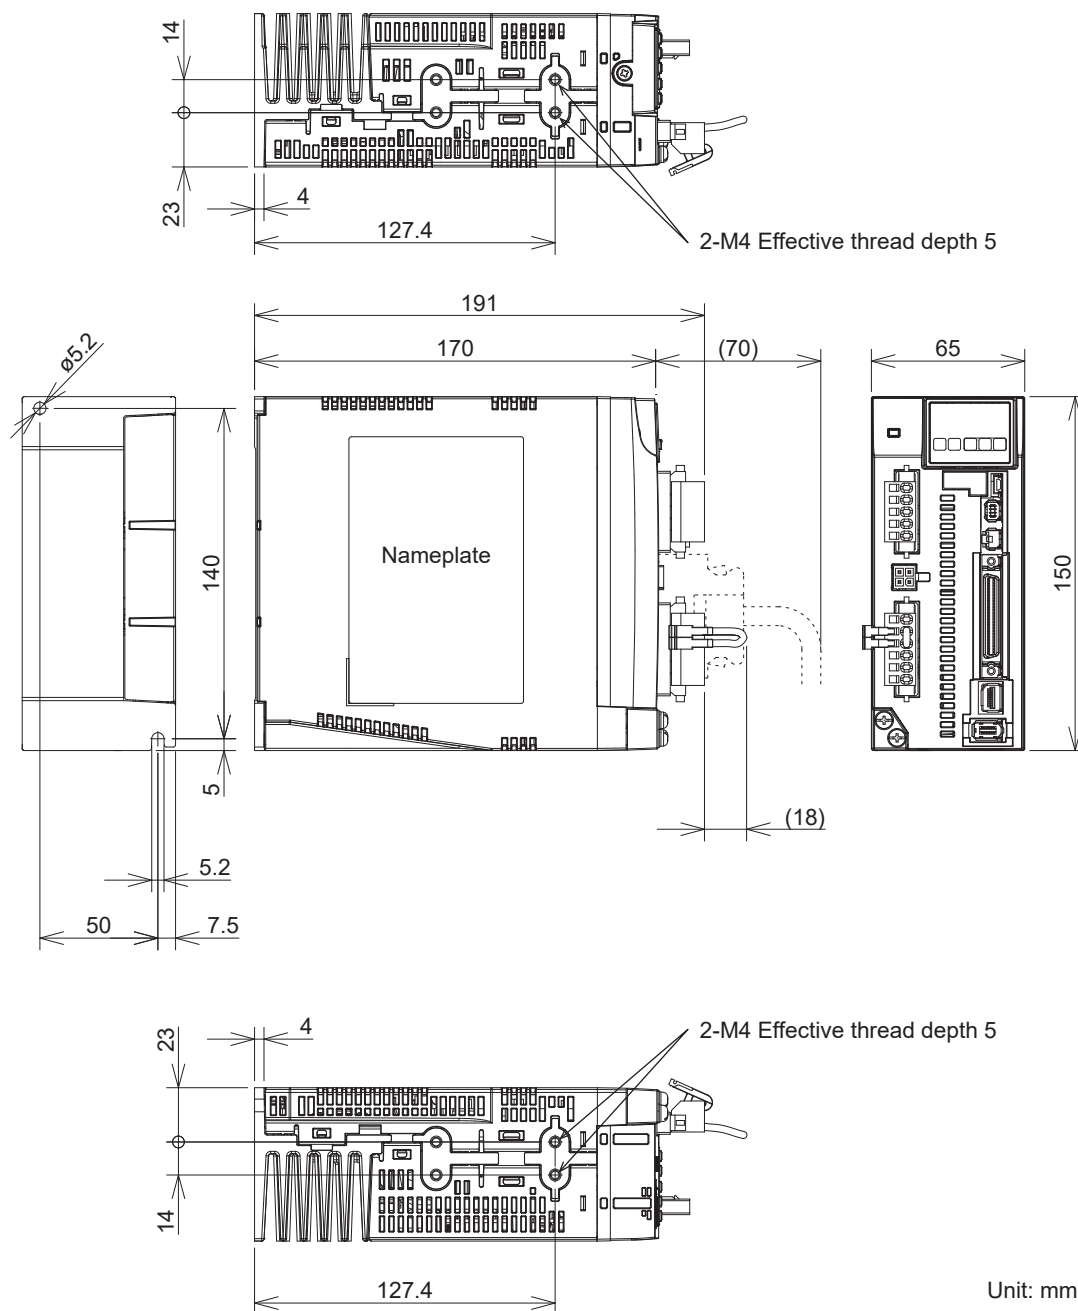

\*1 Do not use screw holes for which no dimensions are shown.

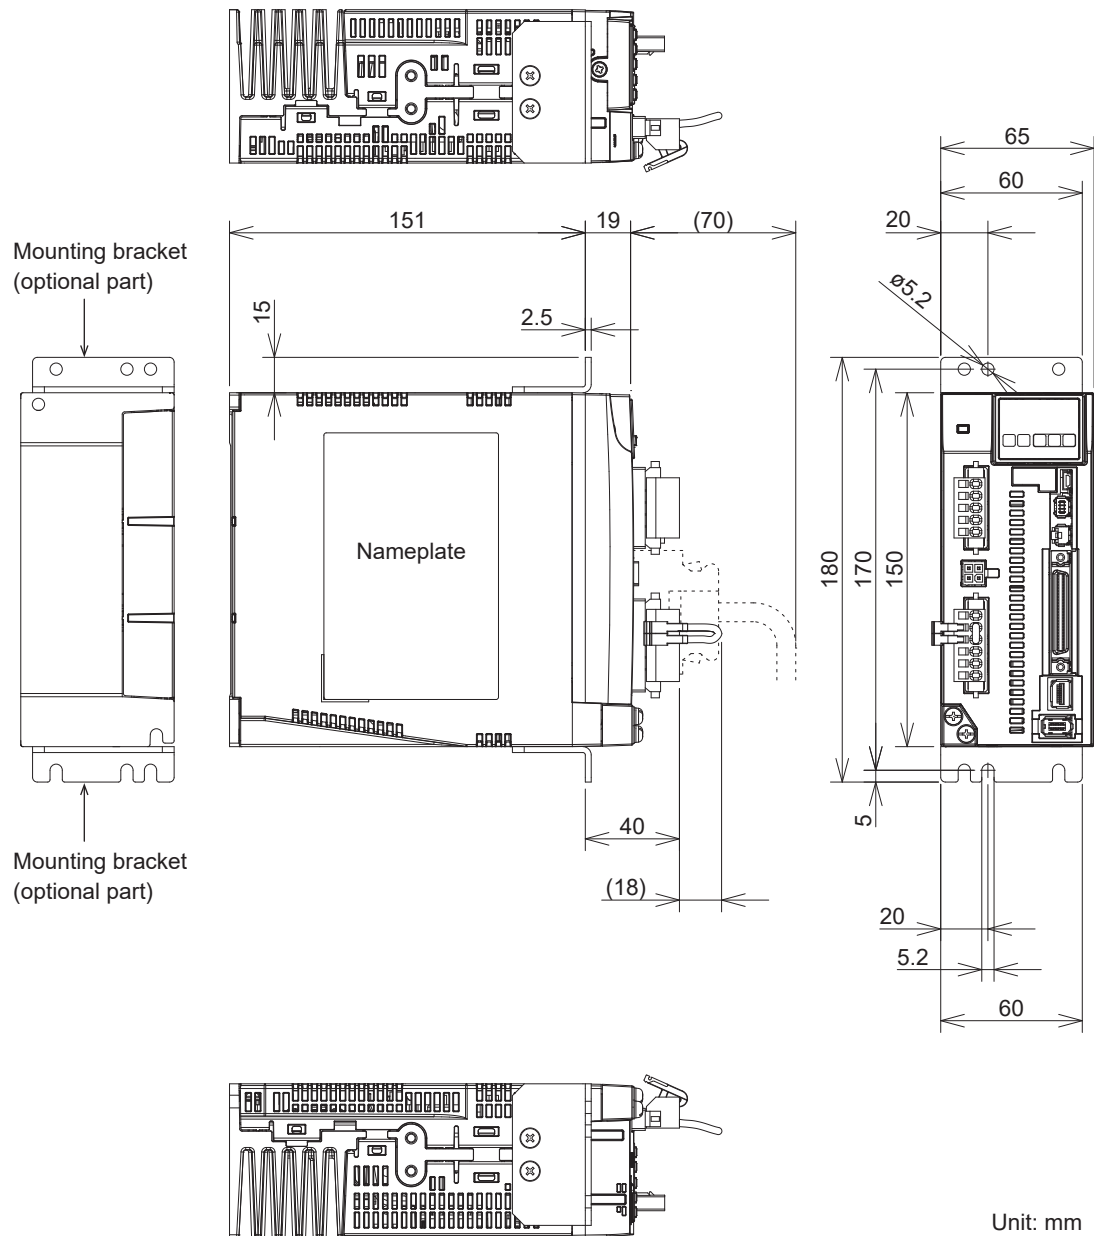
**Rack-mounted installation (Using optional parts: Front-mounted)**

\*1 Do not use screw holes for which no dimensions are shown.

\*2 Mounting brackets are optional parts. They are not included with the product.



# Rack-mounted installation (Using optional parts: Front-mounted)

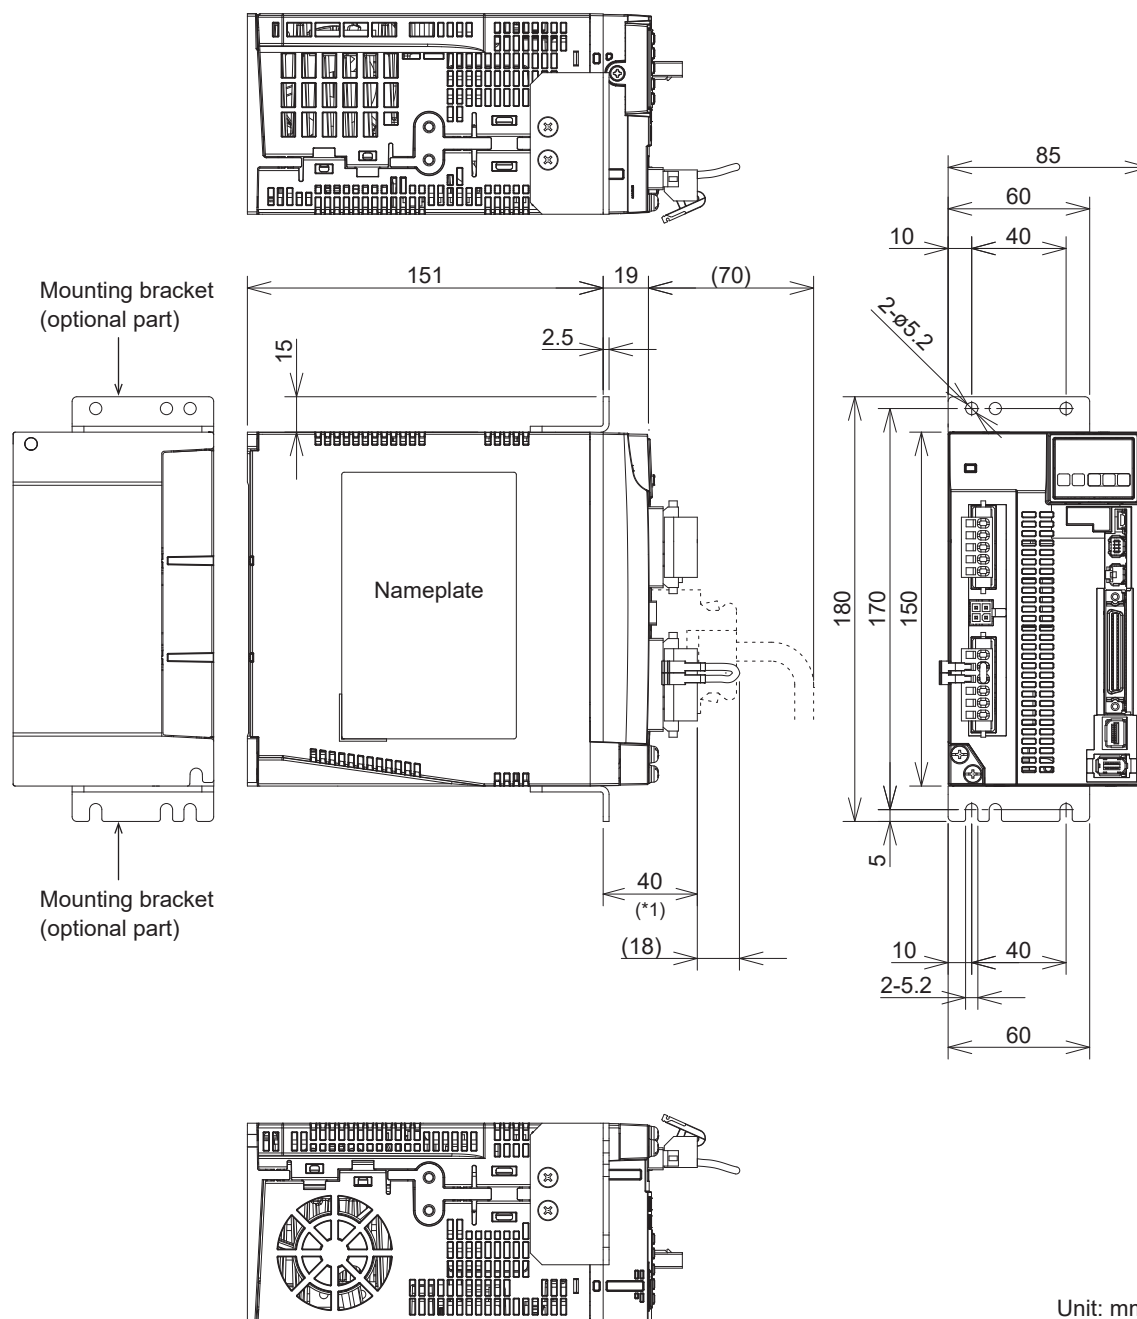


\*1 For the 400 V model, this dimension is 37 mm.

\*2 Do not use screw holes for which no dimensions are shown.

\*3 Mounting brackets are optional parts. They are not included with the product.


## 6.5 Size E 200 V/400 V

### Rack-mounting installation (Standard mounting bracket position: Front-mounted)

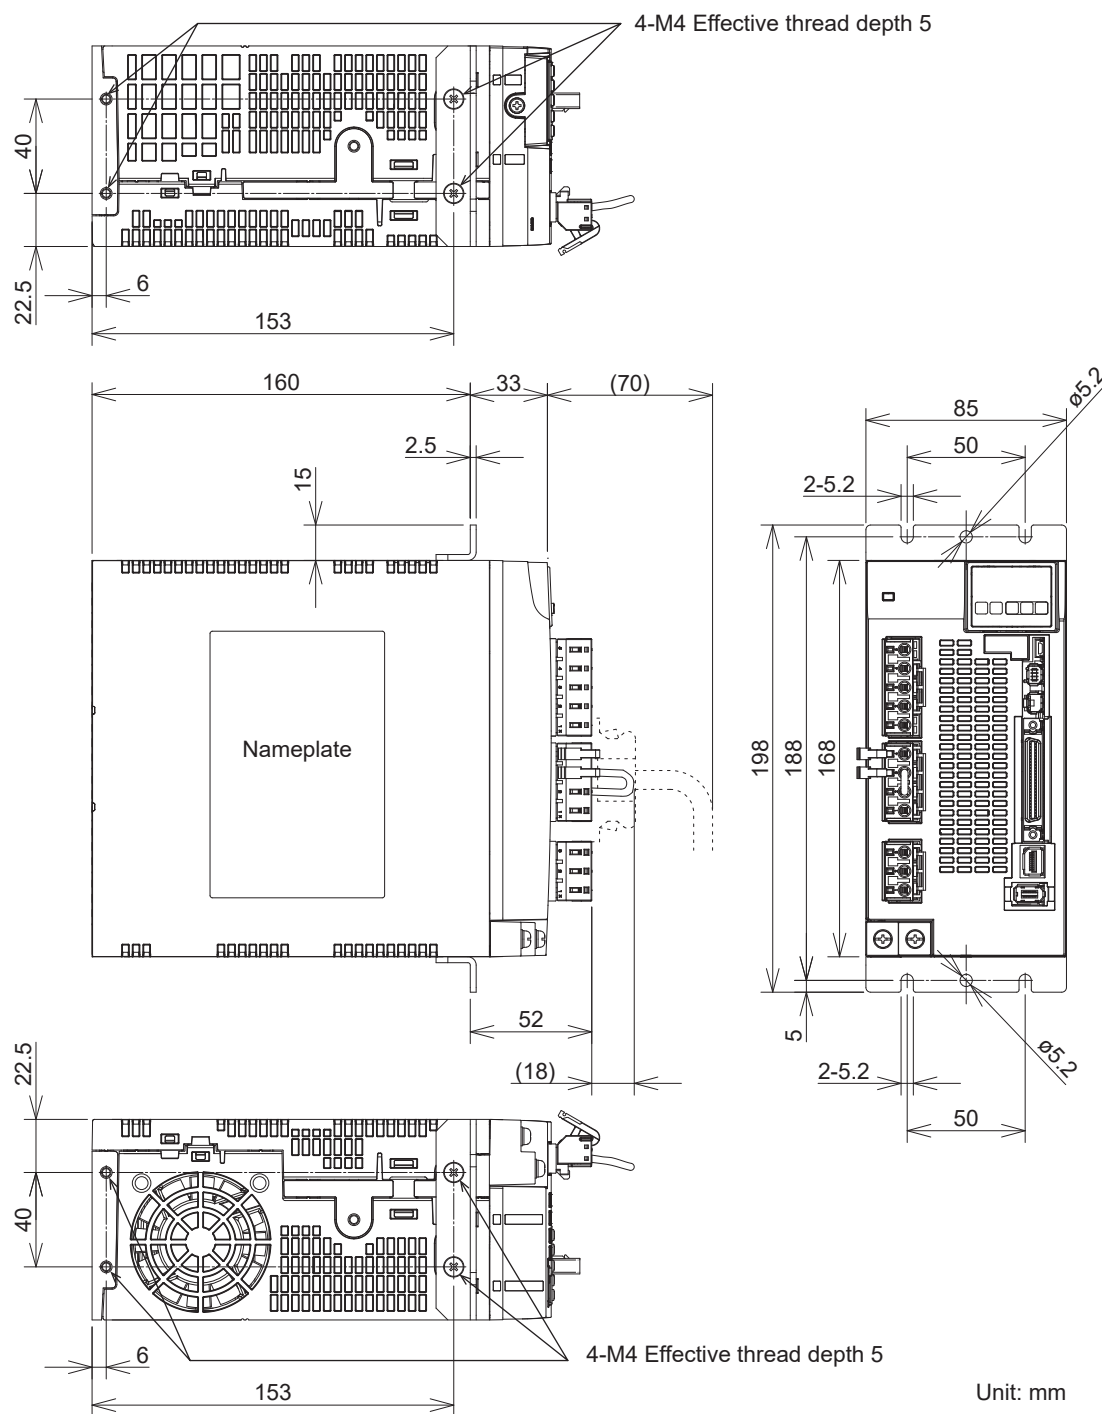

\*1 Do not use screw holes for which no dimensions are shown.

\*2 When installing the servo driver, secure it in the four U-shaped notches on the mounting bracket.

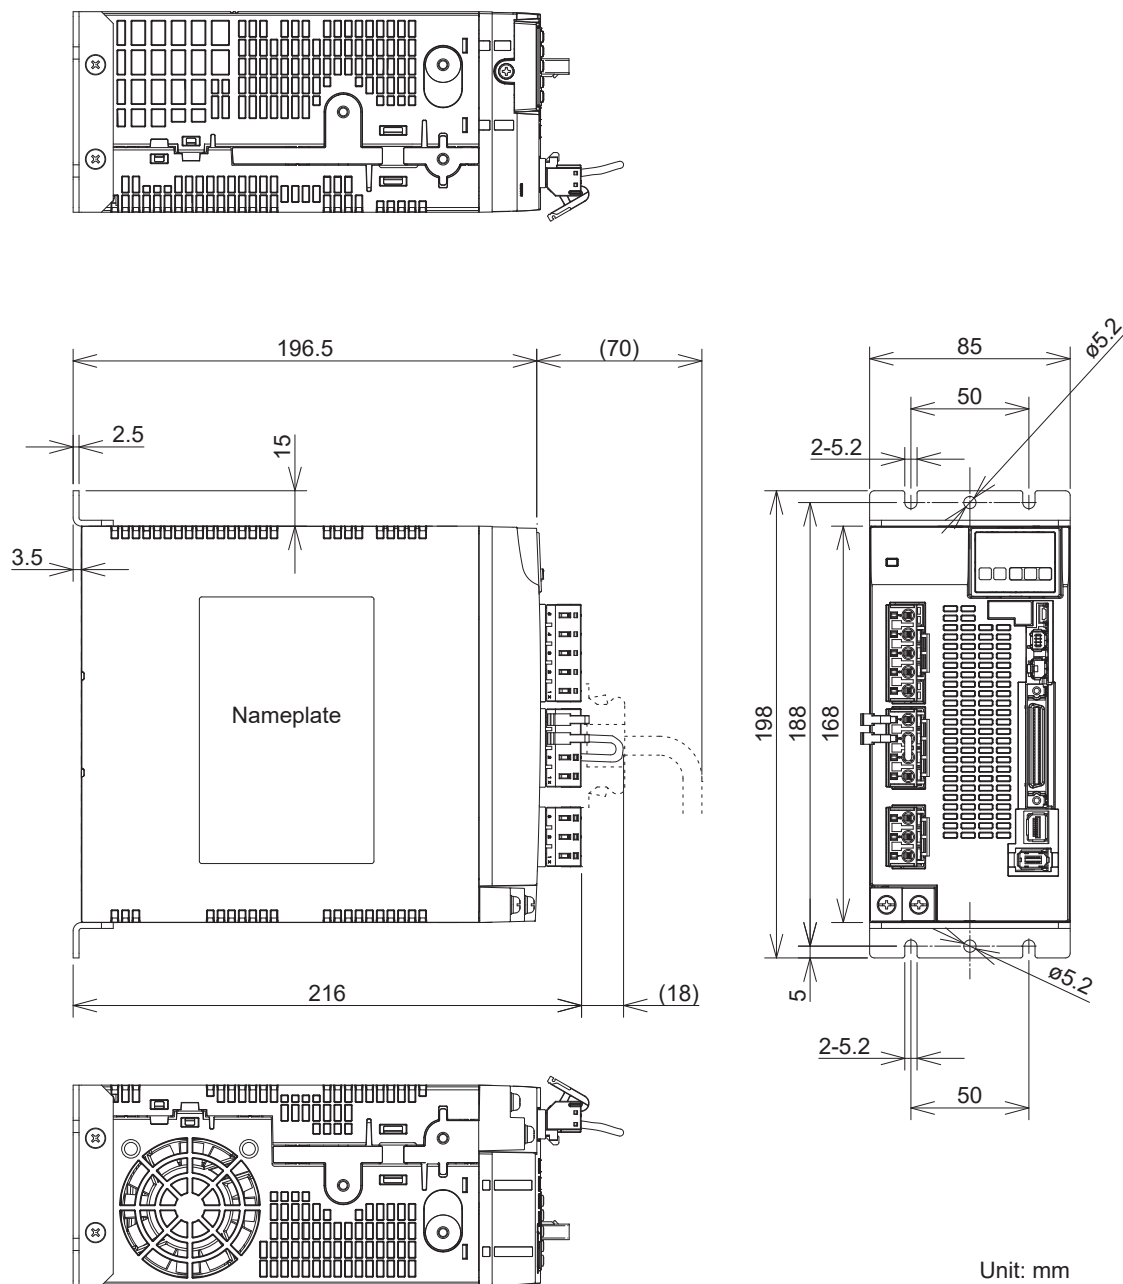
**Base-mounted installation (Modified mounting bracket position: Rear-mounted)**

\*1 Do not use screw holes for which no dimensions are shown.

\*2 When installing the servo driver, secure it in the four U-shaped notches on the mounting bracket.


## 6.6 Size F 200 V/400 V

### Rack-mounting installation (Standard mounting bracket position: Front-mounted)

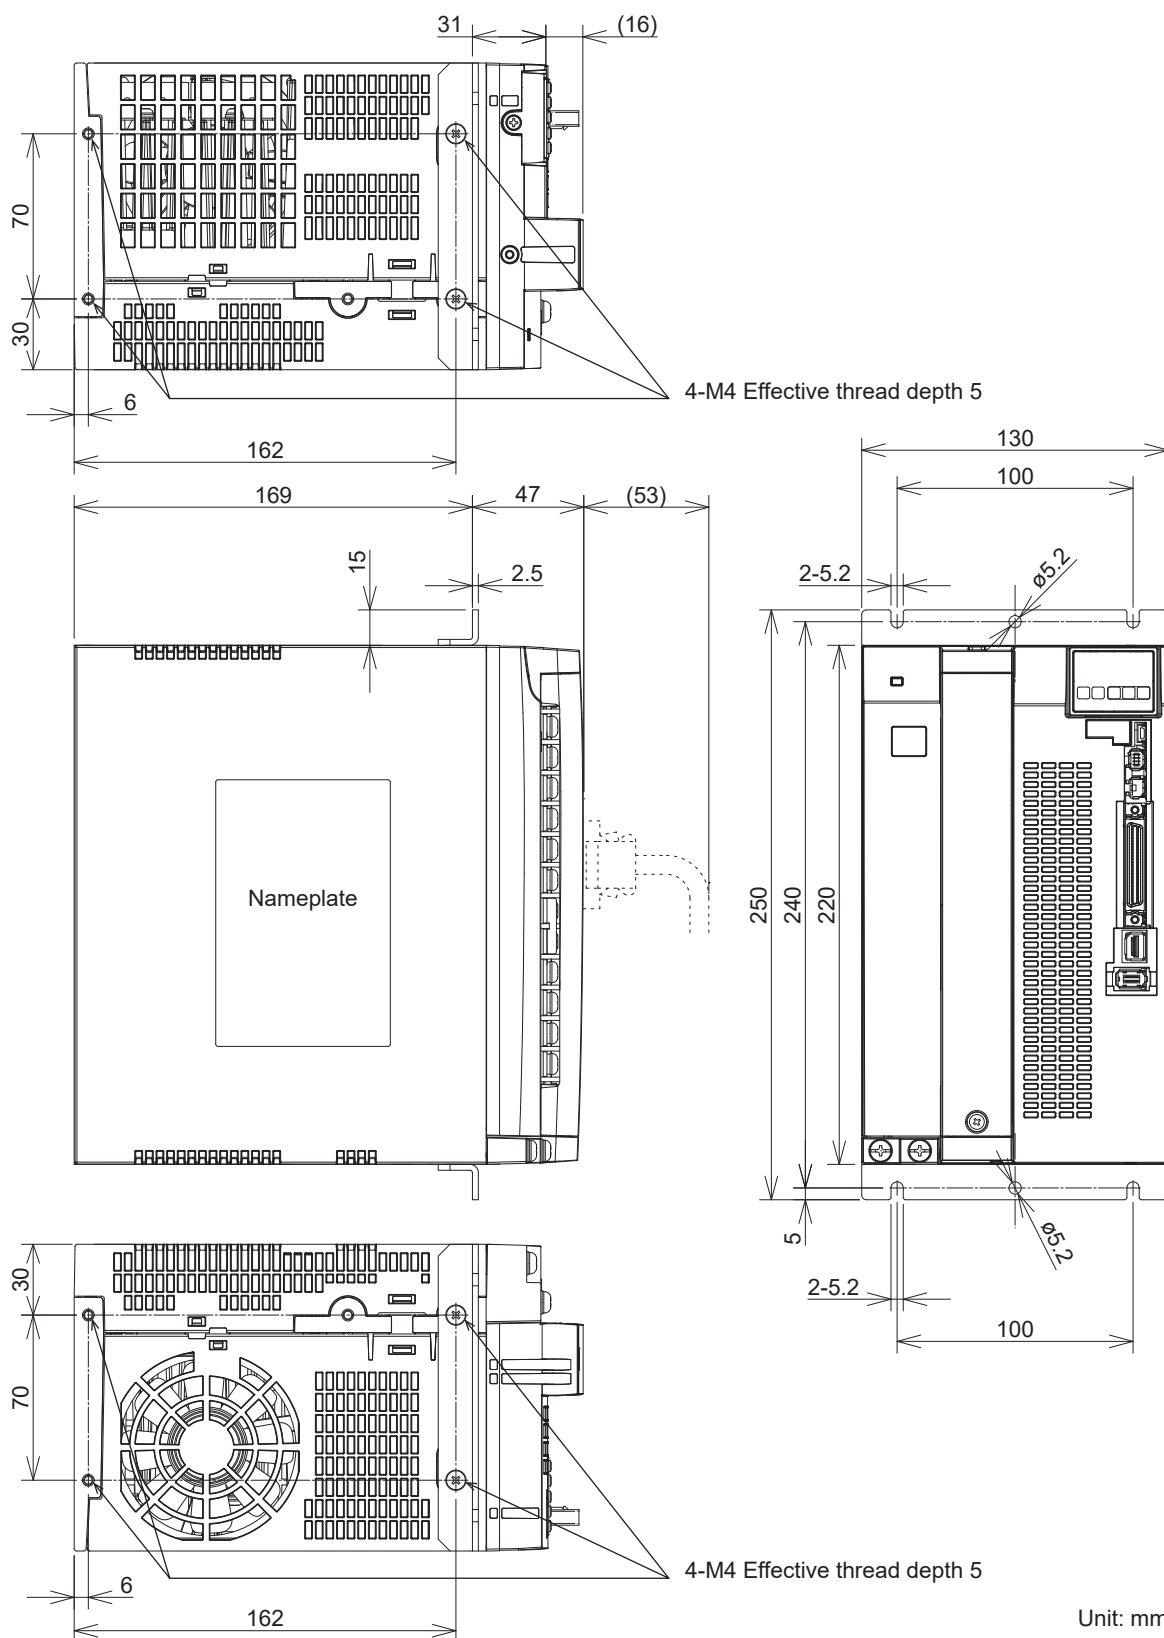

\*1 Do not use screw holes for which no dimensions are shown.

\*2 When installing the servo driver, secure it in the four U-shaped notches on the mounting bracket.

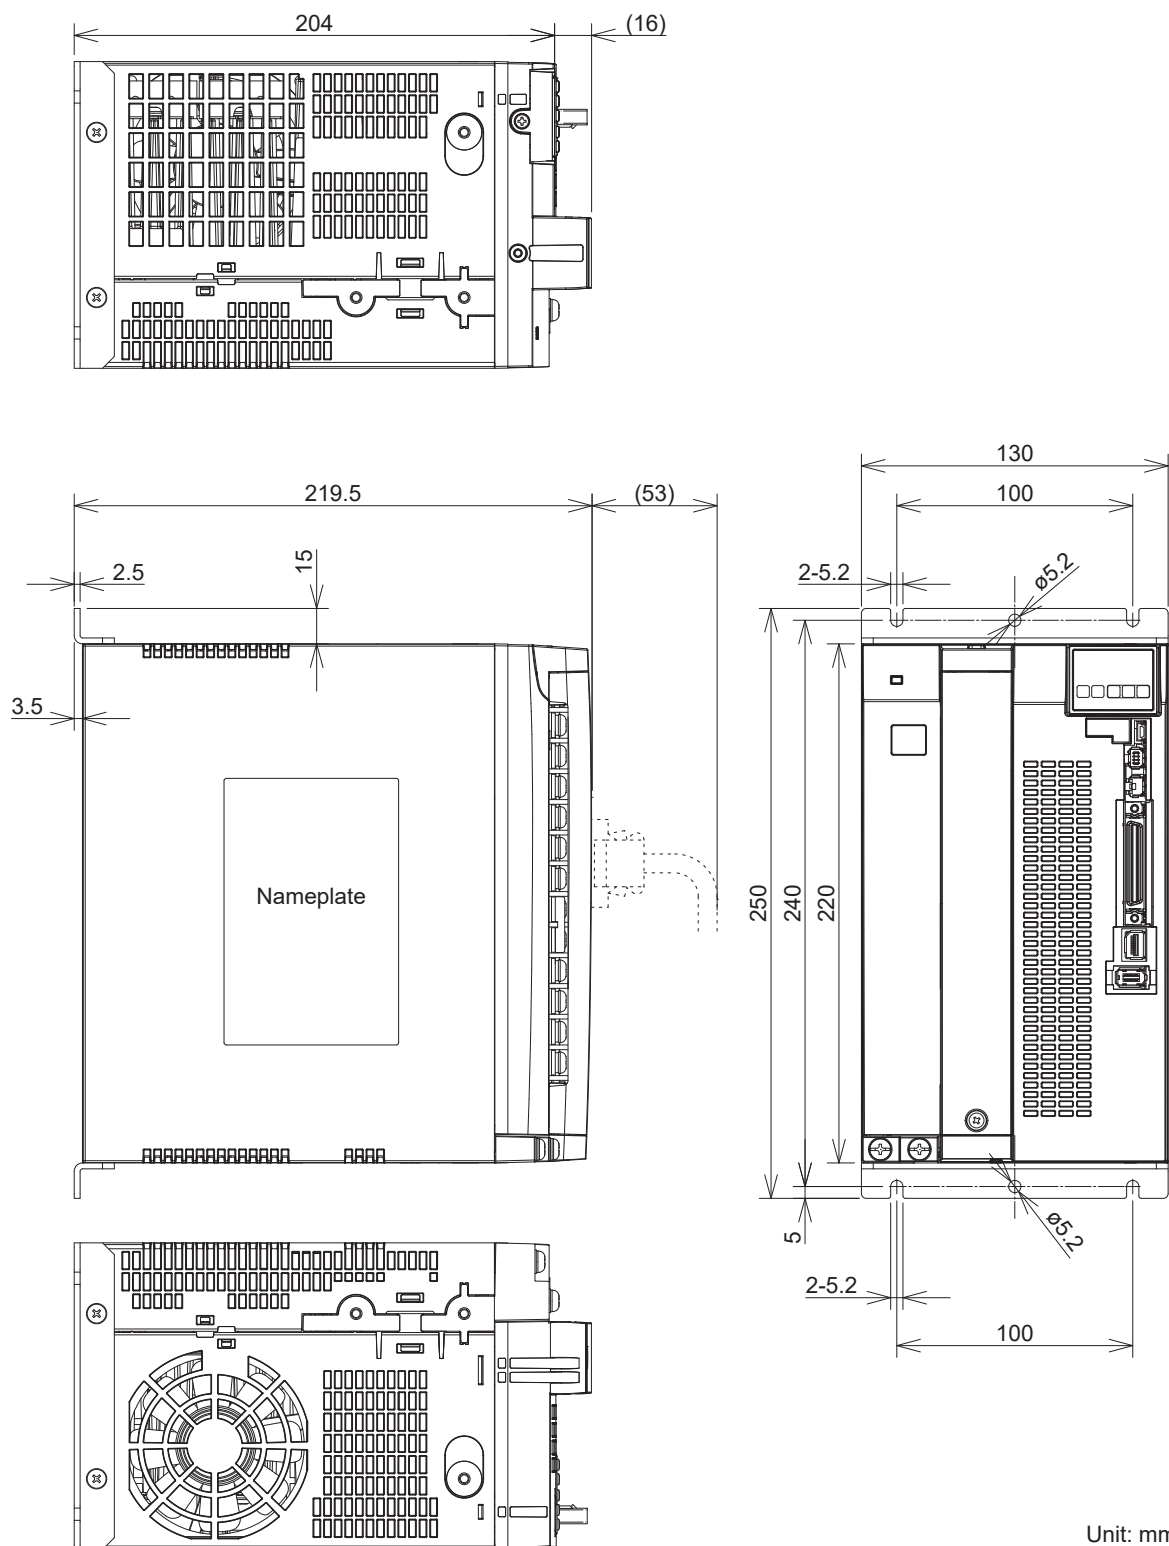
**Base-mounted installation (Modified mounting bracket position: Rear-mounted)**

\*1 Do not use screw holes for which no dimensions are shown.

\*2 When installing the servo driver, secure it in the four U-shaped notches on the mounting bracket.


## 6.7 Size G 200 V/400 V

### Rack-mounting installation (Standard mounting bracket position: Front-mounted)

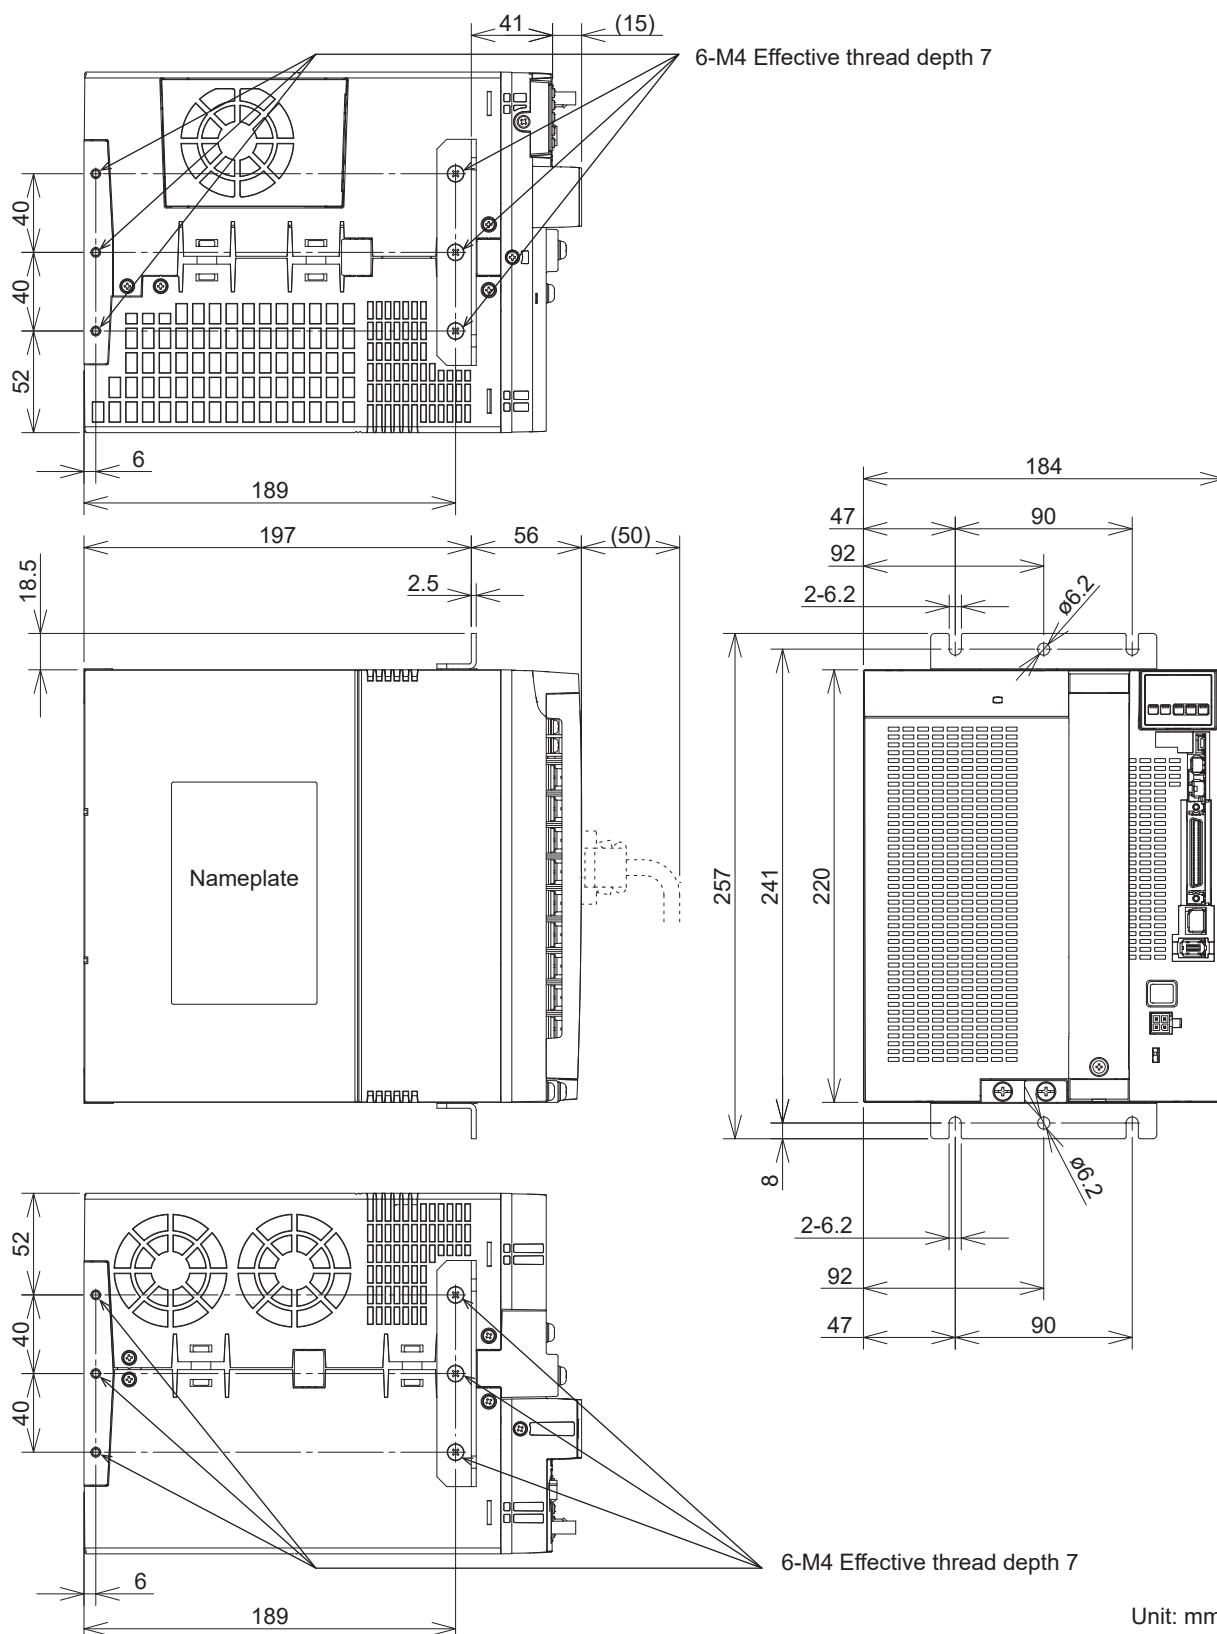

\*1 Do not use screw holes for which no dimensions are shown.

\*2 When installing the servo driver, secure it in the four U-shaped notches on the mounting bracket.

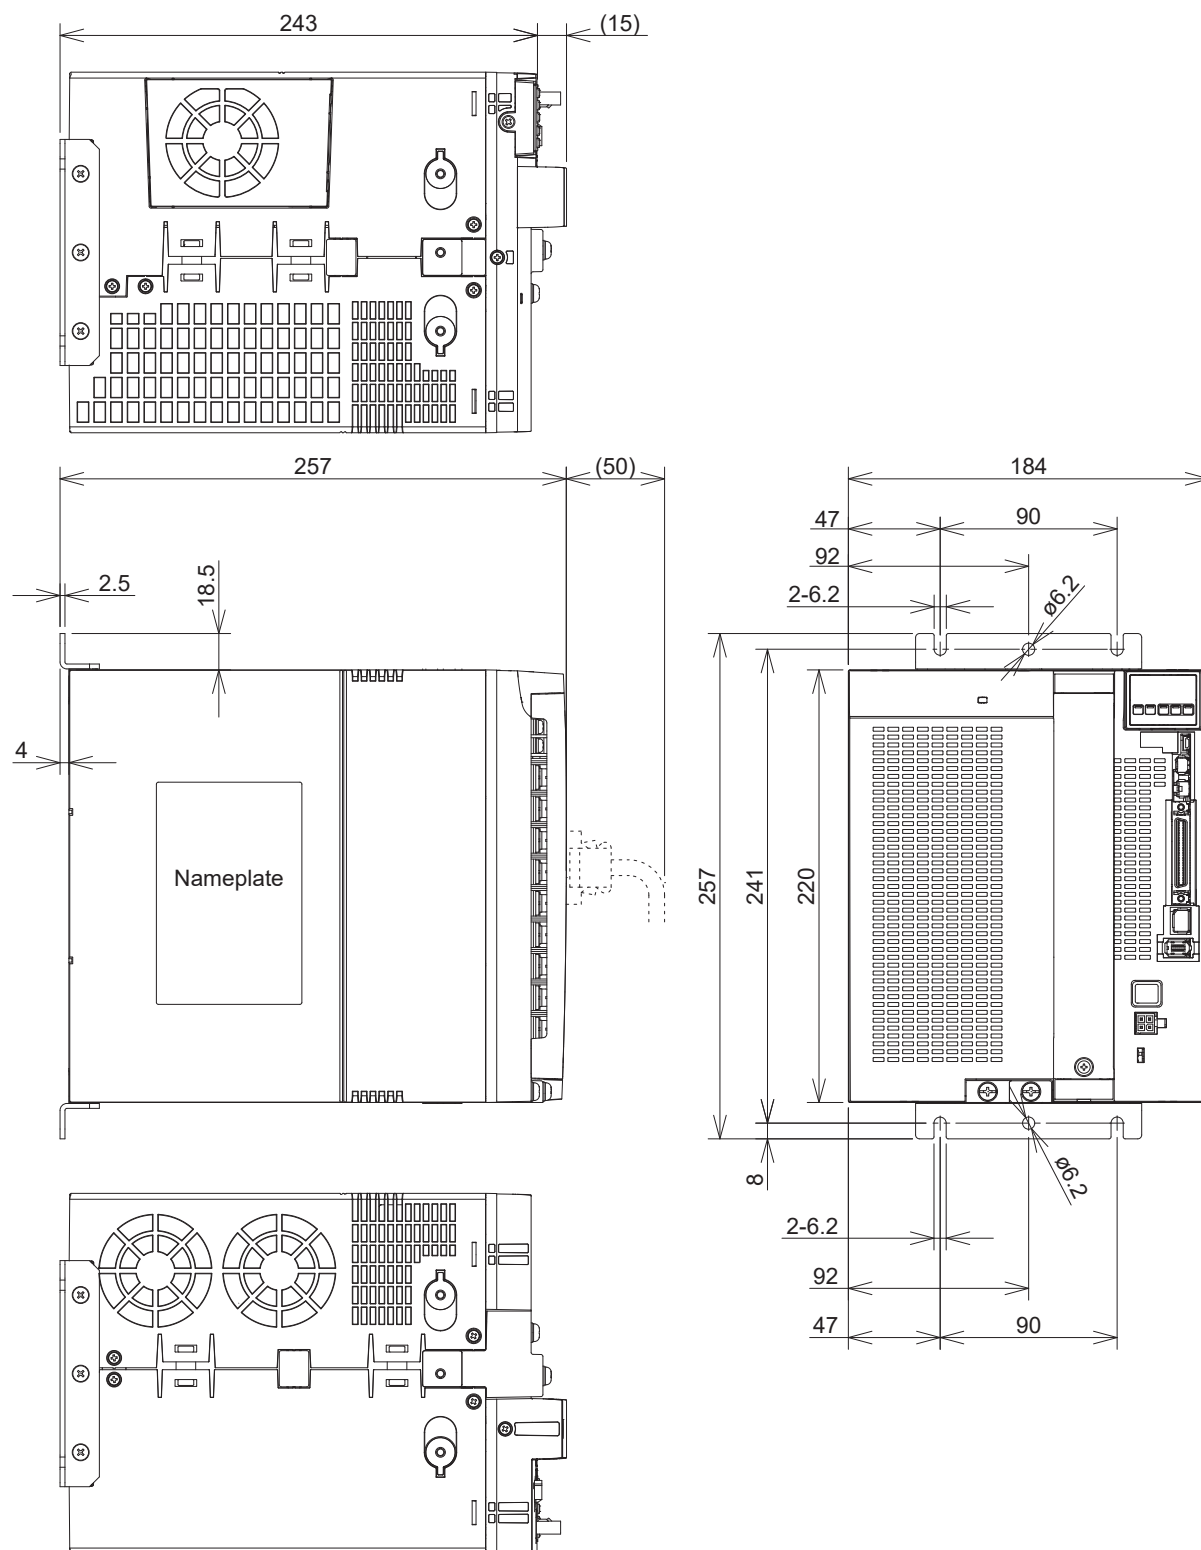**Base-mounted installation (Modified mounting bracket position: Rear-mounted)**


Unit: mm

\*1 Do not use screw holes for which no dimensions are shown.

\*2 When installing the servo driver, secure it in the four U-shaped notches on the mounting bracket.

## 6.8 Size H 200 V/400 V

### Base-mounted installation (Rear-mounted)

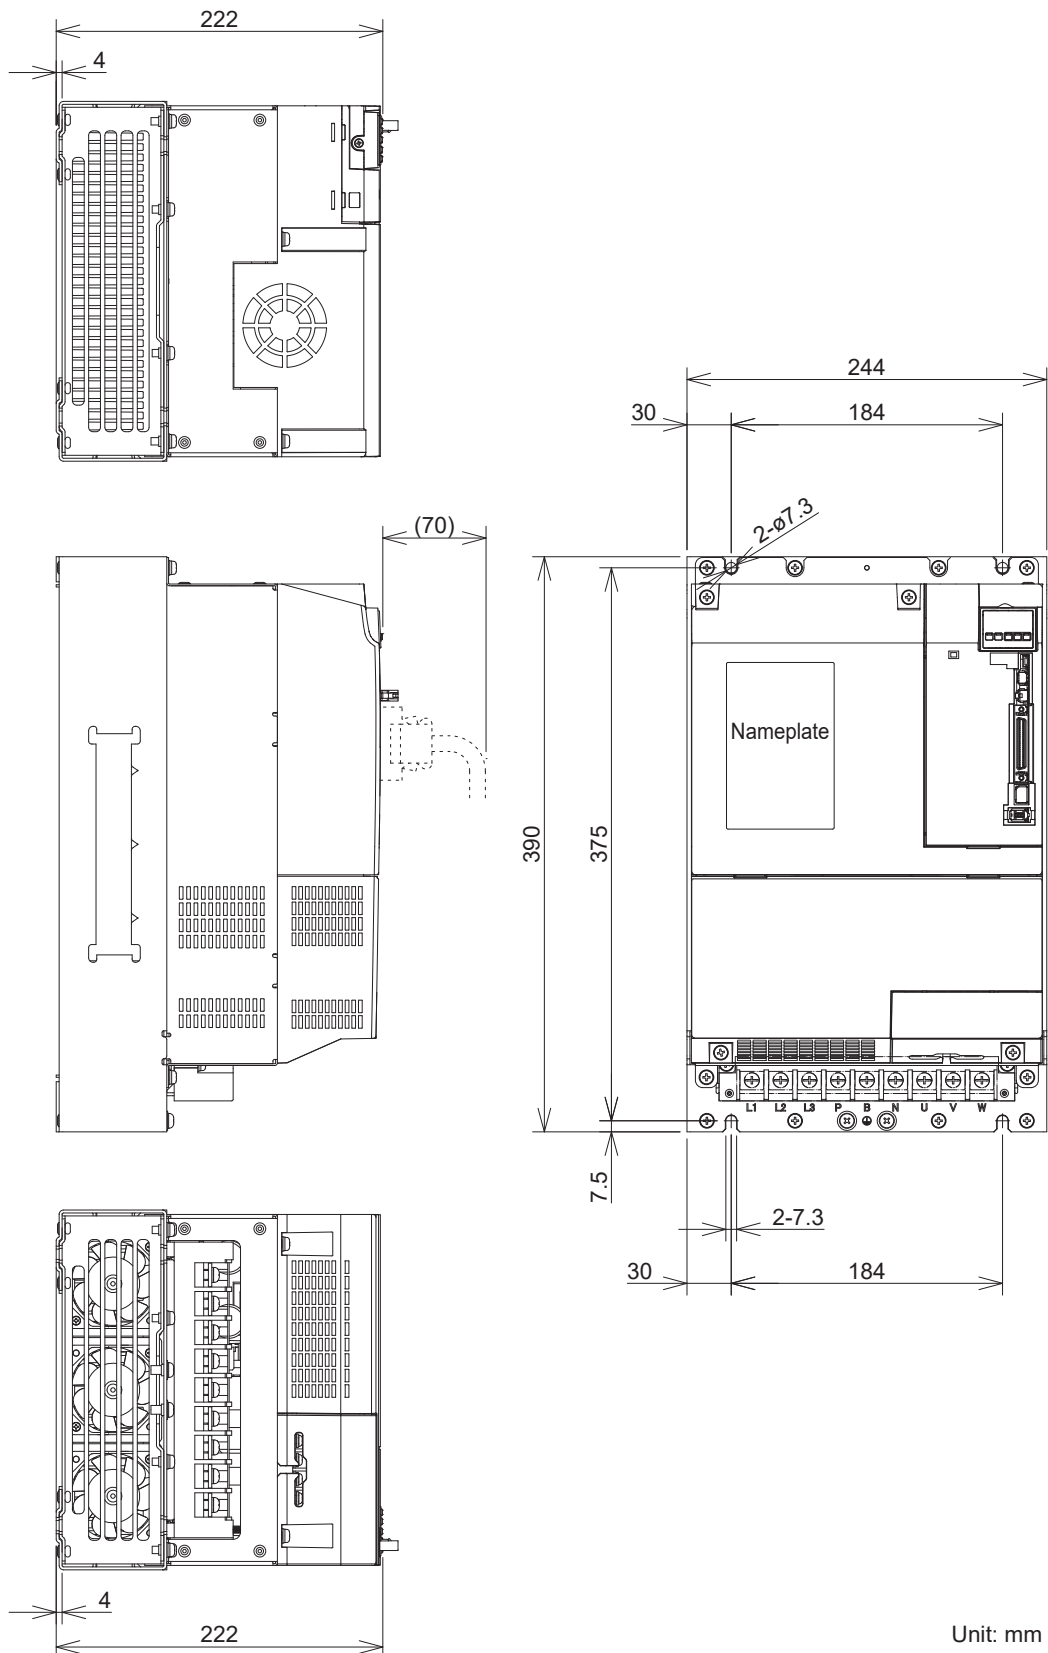

\*1 Do not use screw holes for which no dimensions are shown.

## 7 Configuration of Connectors and Terminal Blocks

### 7.1 Power Connectors XA, XB, XC, XD and Terminal Blocks

#### 7.1.1 Size A, B 100 V/200 V

|    | Pin No.                                                                             | Symbol                                                                              | Name                                      | Description                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                             |
|----|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| XA | 5                                                                                   | L1                                                                                  | Main power supply input terminal          | 100 V                                                                                                                                                                                                                                                                                                                                                                                | Single-phase 100–120 V, -15% to +10%, 50/60 Hz<br>Connect to terminals L1 and L3.                           |
|    | 4                                                                                   | L2                                                                                  |                                           |                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                             |
|    | 3                                                                                   | L3                                                                                  |                                           | 200 V                                                                                                                                                                                                                                                                                                                                                                                | Single-phase/3-phase 200–240 V, -15% to +10%, 50/60 Hz<br>For single-phase, connect to terminals L1 and L3. |
|    | 2                                                                                   | L1C                                                                                 | Control power supply input terminal       | 100 V                                                                                                                                                                                                                                                                                                                                                                                | Single-phase 100–120 V, -15% to +10%, 50/60 Hz                                                              |
|    | 1                                                                                   | L2C                                                                                 |                                           | 200 V                                                                                                                                                                                                                                                                                                                                                                                | Single-phase 200–240 V, -15% to +10%, 50/60 Hz                                                              |
| XB | 6                                                                                   | P                                                                                   | Regenerative resistor connection terminal | <ul style="list-style-type: none"> <li>When using an external regenerative resistor (customer-supplied), connect the external regenerative resistor between P and B. In addition, parameters must be used for regenerative resistor settings. For details, refer to “Technical Reference - Functional Specification”.</li> <li>Do not connect anything to the N terminal.</li> </ul> |                                                                                                             |
|    | 5                                                                                   | N                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                             |
|    | 4                                                                                   | B                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                             |
|    | 3                                                                                   | U                                                                                   | Motor output terminal                     | <ul style="list-style-type: none"> <li>Connect each phase of the motor winding. U: U phase, V: V phase, W: W phase</li> </ul>                                                                                                                                                                                                                                                        |                                                                                                             |
|    | 2                                                                                   | V                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                             |
|    | 1                                                                                   | W                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                             |
|    |  |  | Ground terminal                           | <ul style="list-style-type: none"> <li>Connect with the motor E terminal to ground to earth.</li> </ul>                                                                                                                                                                                                                                                                              |                                                                                                             |

\* Tighten the M4 grounding screw to a torque of 1.0–1.2 N·m.

**7.1.2 Size C, D 100 V/200 V**

|    | Pin No.                                                                             | Symbol                                                                              | Name                                      | Description                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                             |
|----|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| XA | 5                                                                                   | L1                                                                                  | Main power supply input terminal          | 100 V                                                                                                                                                                                                                                                                                                                                                                                                         | Single-phase 100–120 V, -15% to +10%, 50/60 Hz<br>Connect to terminals L1 and L3.                           |
|    | 4                                                                                   | L2                                                                                  |                                           |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                             |
|    | 3                                                                                   | L3                                                                                  |                                           | 200 V                                                                                                                                                                                                                                                                                                                                                                                                         | Single-phase/3-phase 200–240 V, -15% to +10%, 50/60 Hz<br>For single-phase, connect to terminals L1 and L3. |
|    | 2                                                                                   | L1C                                                                                 | Control power supply input terminal       | 100 V                                                                                                                                                                                                                                                                                                                                                                                                         | Single-phase 100–120 V, -15% to +10%, 50/60 Hz                                                              |
|    | 1                                                                                   | L2C                                                                                 |                                           | 200 V                                                                                                                                                                                                                                                                                                                                                                                                         | Single-phase 200–240 V, -15% to +10%, 50/60 Hz                                                              |
| XC | 4                                                                                   | N                                                                                   | —                                         | <ul style="list-style-type: none"><li>Do not connect anything to this connector.</li></ul>                                                                                                                                                                                                                                                                                                                    |                                                                                                             |
|    | 3                                                                                   |                                                                                     |                                           |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                             |
|    | 2                                                                                   | P                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                             |
|    | 1                                                                                   |                                                                                     |                                           |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                             |
| XB | 6                                                                                   | P                                                                                   | Regenerative resistor connection terminal | <ul style="list-style-type: none"><li>Normally, short circuit between RB and B.</li><li>When using an external regenerative resistor (customer-supplied), open between RB and B and connect the external regenerative resistor between P and B.</li></ul> In addition, parameters must be used for regenerative resistor settings.<br>For details, refer to “Technical Reference - Functional Specification”. |                                                                                                             |
|    | 5                                                                                   | RB                                                                                  |                                           |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                             |
|    | 4                                                                                   | B                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                             |
|    | 3                                                                                   | U                                                                                   | Motor output terminal                     | <ul style="list-style-type: none"><li>Connect each phase of the motor winding.</li></ul> U: U phase, V: V phase, W: W phase                                                                                                                                                                                                                                                                                   |                                                                                                             |
|    | 2                                                                                   | V                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                             |
|    | 1                                                                                   | W                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                             |
|    |  |  | Ground terminal                           | <ul style="list-style-type: none"><li>Connect with the motor E terminal to ground to earth.</li></ul>                                                                                                                                                                                                                                                                                                         |                                                                                                             |

\* Tighten the M4 grounding screw to a torque of 1.0–1.2 N·m.

**7.1.3 Size E 200 V**

|    | Pin No.                                                                             | Symbol                                                                              | Name                                      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                |
|----|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| XA | 5                                                                                   | L1                                                                                  | Main power supply input terminal          | 200 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 3-phase 200–240 V, -15% to +10%, 50/60 Hz      |
|    | 4                                                                                   | L2                                                                                  |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                |
|    | 3                                                                                   | L3                                                                                  |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                |
|    | 2                                                                                   | L1C                                                                                 | Control power supply input terminal       | 200 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Single-phase 200–240 V, -15% to +10%, 50/60 Hz |
|    | 1                                                                                   | L2C                                                                                 |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                |
| XC | 4                                                                                   | P                                                                                   | Regenerative resistor connection terminal | <ul style="list-style-type: none"><li>• Normally, short circuit between RB and B.</li><li>• When using an external regenerative resistor (customer-supplied), open between RB and B and connect the external regenerative resistor between P and B.</li></ul> <p>In addition, parameters must be used for regenerative resistor settings.</p> <p>For details, refer to “Technical Reference - Functional Specification”.</p> <ul style="list-style-type: none"><li>• Do not connect anything to the N terminal.</li></ul> |                                                |
|    | 3                                                                                   | RB                                                                                  |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                |
|    | 2                                                                                   | B                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                |
|    | 1                                                                                   | N                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                |
| XB | 3                                                                                   | U                                                                                   | Motor output terminal                     | <ul style="list-style-type: none"><li>• Connect each phase of the motor winding.</li></ul> <p>U: U phase, V: V phase, W: W phase</p>                                                                                                                                                                                                                                                                                                                                                                                      |                                                |
|    | 2                                                                                   | V                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                |
|    | 1                                                                                   | W                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                |
|    |  |  | Ground terminal                           | <ul style="list-style-type: none"><li>• Connect with the motor E terminal to ground to earth.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                |

\* Tighten the M4 grounding screw to a torque of 1.0–1.2 N·m.

### 7.1.4 Size F 200 V

Use terminal blocks.

|                | Terminal block No.<br>(Upper to lower)                                              | Symbol                                                                              | Name                                      | Description                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Terminal block | 1                                                                                   | L1                                                                                  | Main power supply input terminal          | 3-phase 200–240 V, -15% to +10%, 50/60 Hz                                                                                                                                                                                                                                                                                                                                                                        |
|                | 2                                                                                   | L2                                                                                  |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                | 3                                                                                   | L3                                                                                  |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                | 4                                                                                   | L1C                                                                                 | Control power supply input terminal       | Single-phase 200–240 V, -15% to +10%, 50/60 Hz                                                                                                                                                                                                                                                                                                                                                                   |
|                | 5                                                                                   | L2C                                                                                 |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                | 6                                                                                   | P                                                                                   | Regenerative resistor connection terminal | <ul style="list-style-type: none"> <li>Normally, short circuit between RB and B.</li> <li>When using an external regenerative resistor (customer-supplied), open between RB and B and connect the external regenerative resistor between P and B.</li> </ul> In addition, parameters must be used for regenerative resistor settings.<br>For details, refer to “Technical Reference - Functional Specification”. |
|                | 7                                                                                   | RB                                                                                  |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                | 8                                                                                   | B                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                | 9                                                                                   | N                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                | 10                                                                                  | U                                                                                   | Motor output terminal                     | <ul style="list-style-type: none"> <li>Connect each phase of the motor winding.</li> </ul> U: U phase, V: V phase, W: W phase                                                                                                                                                                                                                                                                                    |
|                | 11                                                                                  | V                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                | 12                                                                                  | W                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                |  |  | Ground terminal                           | <ul style="list-style-type: none"> <li>Connect with the motor E terminal to ground to earth.</li> </ul>                                                                                                                                                                                                                                                                                                          |

- \* Tighten the M5 grounding screw to a torque of 1.8–2.0 N·m.
- \* Tighten the M5 terminal block screw to a torque of 1.8–2.0 N·m.
- \* Tighten the M3 screw for securing the terminal block cover to a torque of 0.19–0.21 N·m.
- \* Exceeding the maximum tightening torque may cause damage.

### 7.1.5 Size G 200 V

Use terminal blocks.

|       | Terminal block No.<br>(Upper to lower)                                            | Symbol                                                                            | Name                                      | Description                                                                                                                                                                                                                                                                                                                                                                          |
|-------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Upper | 1                                                                                 | L1C                                                                               | Control power supply input terminal       | Single-phase 200–240 V, -15% to +10%, 50/60 Hz                                                                                                                                                                                                                                                                                                                                       |
|       | 2                                                                                 | L2C                                                                               |                                           |                                                                                                                                                                                                                                                                                                                                                                                      |
| Lower | 1                                                                                 | L1                                                                                | Main power supply input terminal          | 3-phase 200–240 V, -15% to +10%, 50/60 Hz                                                                                                                                                                                                                                                                                                                                            |
|       | 2                                                                                 | L2                                                                                |                                           |                                                                                                                                                                                                                                                                                                                                                                                      |
|       | 3                                                                                 | L3                                                                                |                                           |                                                                                                                                                                                                                                                                                                                                                                                      |
|       | 4                                                                                 | P                                                                                 | Regenerative resistor connection terminal | <ul style="list-style-type: none"> <li>When using an external regenerative resistor (customer-supplied), connect the external regenerative resistor between P and B. In addition, parameters must be used for regenerative resistor settings. For details, refer to “Technical Reference - Functional Specification”.</li> <li>Do not connect anything to the N terminal.</li> </ul> |
|       | 5                                                                                 | B                                                                                 |                                           |                                                                                                                                                                                                                                                                                                                                                                                      |
|       | 6                                                                                 | N                                                                                 |                                           |                                                                                                                                                                                                                                                                                                                                                                                      |
|       | 7                                                                                 | U                                                                                 | Motor output terminal                     | <ul style="list-style-type: none"> <li>Connect each phase of the motor winding. U: U phase, V: V phase, W: W phase</li> </ul>                                                                                                                                                                                                                                                        |
|       | 8                                                                                 | V                                                                                 |                                           |                                                                                                                                                                                                                                                                                                                                                                                      |
|       | 9                                                                                 | W                                                                                 |                                           |                                                                                                                                                                                                                                                                                                                                                                                      |
|       |  |  | Ground terminal                           | <ul style="list-style-type: none"> <li>Connect with the motor E terminal to ground to earth.</li> </ul>                                                                                                                                                                                                                                                                              |

#### Connector

|    | Pin No. | Symbol | Name                                    | Description                                                                                                                                                                                                                                                                                    |
|----|---------|--------|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| XE | 1       | DB1    | External dynamic brake control terminal | <ul style="list-style-type: none"> <li>This terminal is used to control electromagnetic contactor MC for the external dynamic brake resistor (customer-supplied). Connect if necessary.</li> <li>The applied voltage between DB1 and DB2 should be less than AC 300 V and DC 100 V.</li> </ul> |
|    | 2       | DB2    |                                         |                                                                                                                                                                                                                                                                                                |

- \* Tighten the M5 grounding screw to a torque of 1.8–2.0 N·m.
- \* Tighten the M3 terminal block (control power supply) screw to a torque of 0.4–0.6 N·m.  
Exceeding the maximum tightening torque may damage the terminal block.
- \* Tighten the M5 terminal block (main power supply, regenerative resistor, motor) screw to a torque of 2.0–2.4 N·m.  
Exceeding the maximum tightening torque may damage the terminal block.
- \* Tighten the M3 screw for securing the terminal block cover to a torque of 0.19–0.21 N·m.  
Exceeding the maximum tightening torque may cause damage.

### 7.1.6 Size H 200 V

Use terminal blocks.

|       | Terminal block No.<br>(From the left)                                               | Symbol                                                                              | Name                                       | Description                                                                                                                                                                                                                                                                                                                                                                          |
|-------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Upper | 1                                                                                   | L1C                                                                                 | Control power supply input terminal        | Single-phase 200–240 V, -15% to +10%, 50/60 Hz                                                                                                                                                                                                                                                                                                                                       |
|       | 2                                                                                   | L2C                                                                                 |                                            |                                                                                                                                                                                                                                                                                                                                                                                      |
|       | 3                                                                                   | DB1                                                                                 | Dynamic brake resistor connection terminal | <ul style="list-style-type: none"> <li>This terminal is used to control electromagnetic contactor MC for the external dynamic brake resistor (customer-supplied). Connect if necessary.</li> <li>The applied voltage between DB1 and DB2 should be less than AC 300 V and DC 100 V.</li> </ul>                                                                                       |
|       | 4                                                                                   | DB2                                                                                 |                                            |                                                                                                                                                                                                                                                                                                                                                                                      |
| Lower | 1                                                                                   | L1                                                                                  | Main power supply input terminal           | 3-phase 200–240 V, -15% to +10%, 50/60 Hz                                                                                                                                                                                                                                                                                                                                            |
|       | 2                                                                                   | L2                                                                                  |                                            |                                                                                                                                                                                                                                                                                                                                                                                      |
|       | 3                                                                                   | L3                                                                                  |                                            |                                                                                                                                                                                                                                                                                                                                                                                      |
|       | 4                                                                                   | P                                                                                   | Regenerative resistor connection terminal  | <ul style="list-style-type: none"> <li>When using an external regenerative resistor (customer-supplied), connect the external regenerative resistor between P and B. In addition, parameters must be used for regenerative resistor settings. For details, refer to “Technical Reference - Functional Specification”.</li> <li>Do not connect anything to the N terminal.</li> </ul> |
|       | 5                                                                                   | B                                                                                   |                                            |                                                                                                                                                                                                                                                                                                                                                                                      |
|       | 6                                                                                   | N                                                                                   |                                            |                                                                                                                                                                                                                                                                                                                                                                                      |
|       | 7                                                                                   | U                                                                                   | Motor connection terminal                  | <ul style="list-style-type: none"> <li>Connect each phase of the motor winding. U: U phase, V: V phase, W: W phase</li> </ul>                                                                                                                                                                                                                                                        |
|       | 8                                                                                   | V                                                                                   |                                            |                                                                                                                                                                                                                                                                                                                                                                                      |
|       | 9                                                                                   | W                                                                                   |                                            |                                                                                                                                                                                                                                                                                                                                                                                      |
|       |  |  | Ground terminal                            | <ul style="list-style-type: none"> <li>Connect with the motor E terminal to ground to earth.</li> </ul>                                                                                                                                                                                                                                                                              |

- \* Tighten the M6 grounding screw to a torque of 2.4–2.6 N·m.
- \* Tighten the M4 terminal block (upper: control power supply, dynamic brake) screw to a torque of 0.7–1.0 N·m. Exceeding the maximum tightening torque may damage the terminal block.
- \* Tighten the M6 terminal block (lower: main power supply, regenerative resistor, motor) screw to a torque of 2.2–2.5 N·m. Exceeding the maximum tightening torque may damage the terminal block.
- \* Tighten the M3 screw for securing terminal block cover 1 (transparent) to a torque of 0.19–0.21 N·m.
- \* Tighten the M5 screw for securing terminal block cover 2 (black) to a torque of 2.0–2.5 N·m.

**7.1.7 Size D, E 400 V**

|    | Pin No.                                                                           | Symbol                                                                            | Name                                      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| XD | 1                                                                                 | 24V                                                                               | Control power supply input terminal       | DC 24 V, $\pm 15\%$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|    | 2                                                                                 | 0V                                                                                |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| XA | 3                                                                                 | L1                                                                                | Main power supply input terminal          | 3-phase 380Y/220-480Y/277 V, -15% to +10%, 50/60 Hz<br>TN (ground the neutral point to earth)                                                                                                                                                                                                                                                                                                                                                                                                                 |
|    | 2                                                                                 | L2                                                                                |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|    | 1                                                                                 | L3                                                                                |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| XC | 4                                                                                 | P                                                                                 | Regenerative resistor connection terminal | <ul style="list-style-type: none"> <li>Normally, short circuit between RB and B.</li> <li>When using an external regenerative resistor (customer-supplied), open between RB and B and connect the external regenerative resistor between P and B.</li> </ul> In addition, parameters must be used for regenerative resistor settings.<br>For details, refer to "Technical Reference - Functional Specification". <ul style="list-style-type: none"> <li>Do not connect anything to the N terminal.</li> </ul> |
|    | 3                                                                                 | RB                                                                                |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|    | 2                                                                                 | B                                                                                 |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|    | 1                                                                                 | N                                                                                 |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| XB | 3                                                                                 | U                                                                                 | Motor output terminal                     | <ul style="list-style-type: none"> <li>Connect each phase of the motor winding.</li> </ul> U: U phase, V: V phase, W: W phase                                                                                                                                                                                                                                                                                                                                                                                 |
|    | 2                                                                                 | V                                                                                 |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|    | 1                                                                                 | W                                                                                 |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|    |  |  | Ground terminal                           | <ul style="list-style-type: none"> <li>Connect with the motor E terminal to ground to earth.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                       |

\* Tighten the M4 grounding screw to a torque of 1.0–1.2 N·m.

### 7.1.8 Size F 400 V

Use terminal blocks.

|                | Terminal block No.<br>(Upper to lower)                                              | Symbol                                                                              | Name                                      | Description                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Terminal block | 1                                                                                   | —                                                                                   | Free terminals                            |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                | 2                                                                                   | —                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                | 3                                                                                   | L1                                                                                  | Main power supply input terminal          | 3-phase 380Y/220-480Y/277 V, -15% to +10%, 50/60 Hz TN (ground the neutral point to earth)                                                                                                                                                                                                                                                                                                                       |
|                | 4                                                                                   | L2                                                                                  |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                | 5                                                                                   | L3                                                                                  |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                | 6                                                                                   | P                                                                                   | Regenerative resistor connection terminal | <ul style="list-style-type: none"> <li>Normally, short circuit between RB and B.</li> <li>When using an external regenerative resistor (customer-supplied), open between RB and B and connect the external regenerative resistor between P and B.</li> </ul> In addition, parameters must be used for regenerative resistor settings.<br>For details, refer to "Technical Reference - Functional Specification". |
|                | 7                                                                                   | RB                                                                                  |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                | 8                                                                                   | B                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                | 9                                                                                   | N                                                                                   | Motor output terminal                     | <ul style="list-style-type: none"> <li>Do not connect anything to the N terminal.</li> </ul>                                                                                                                                                                                                                                                                                                                     |
|                | 10                                                                                  | U                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                | 11                                                                                  | V                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                | 12                                                                                  | W                                                                                   |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                |  |  | Ground terminal                           | <ul style="list-style-type: none"> <li>Connect with the motor E terminal to ground to earth.</li> </ul>                                                                                                                                                                                                                                                                                                          |

#### Connector

|    | Pin No. | Symbol | Name                                | Description         |
|----|---------|--------|-------------------------------------|---------------------|
| XD | 1       | 24V    | Control power supply input terminal | DC 24 V, $\pm 15\%$ |
|    | 2       | 0V     |                                     |                     |

- \* Tighten the M5 grounding screw to a torque of 1.8–2.0 N·m.
- \* Tighten the M5 terminal block screw to a torque of 1.8–2.0 N·m.
- \* Tighten the M3 screw for securing the terminal block cover to a torque of 0.19–0.21 N·m.
- \* Exceeding the maximum tightening torque may cause damage.

## 7.2 USB Connector X1

By connecting to computer or NC controller via the USB interface, it is possible to set/change parameters, monitor control status, view error status/history, save/load parameters, etc.

| Name                 | Symbol | Pin No. | Description                                                                                                |
|----------------------|--------|---------|------------------------------------------------------------------------------------------------------------|
| USB signal connector | VBUS   | 1       | <ul style="list-style-type: none"> <li>Used for communication with computers or NC controllers.</li> </ul> |
|                      | D-     | 2       |                                                                                                            |
|                      | D+     | 3       |                                                                                                            |
| For manufacturer use | —      | 4       | <ul style="list-style-type: none"> <li>Do not connect anything</li> </ul>                                  |
| Signal ground        | GND    | 5       | <ul style="list-style-type: none"> <li>Signal ground</li> </ul>                                            |

The connector type on the servo driver side is USB mini-B.

## 7.3 Serial bus connector X2

This connector is only compatible with the multifunction type and the general-purpose communication type.

| Name          | Symbol | Pin No. | Description                                                                                          |
|---------------|--------|---------|------------------------------------------------------------------------------------------------------|
| Signal ground | GND    | 1       | <ul style="list-style-type: none"> <li>Signal ground (*1)</li> </ul>                                 |
| NC            | —      | 2       | <ul style="list-style-type: none"> <li>Do not connect anything</li> </ul>                            |
| RS232 signal  | TXD    | 3       | <ul style="list-style-type: none"> <li>Serial bus transmission and reception data (RS232)</li> </ul> |
|               | RXD    | 4       |                                                                                                      |
| RS485 signal  | 485-   | 5       | <ul style="list-style-type: none"> <li>Serial bus transmission and reception data (RS485)</li> </ul> |
|               |        | 7       |                                                                                                      |
|               | 485+   | 6       |                                                                                                      |
|               |        | 8       |                                                                                                      |
| Frame ground  | FG     | Shell   | <ul style="list-style-type: none"> <li>Frame ground</li> </ul>                                       |

\*1 The signal ground GND is connected with the control circuit ground connected with the connector X4.

## 7.4 Safety Function Connector X3

This is a connector for functional safety.

This connector is only compatible with the multifunction type.

| Name           | Symbol | Pin No. | Description                                                                                                                                             | I/O signal interface |
|----------------|--------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Reserved       | —      | 1       | <ul style="list-style-type: none"> <li>Do not connect anything</li> </ul>                                                                               | —                    |
|                | —      | 2       |                                                                                                                                                         | —                    |
| Safety input 1 | SF1-   | 3       | <ul style="list-style-type: none"> <li>Two independent circuits turn off the drive signal to the power module and cut off the motor current.</li> </ul> | i-1                  |
|                | SF1+   | 4       |                                                                                                                                                         |                      |
| Safety input 2 | SF2-   | 5       |                                                                                                                                                         |                      |
|                | SF2+   | 6       |                                                                                                                                                         |                      |
| EDM output     | EDM-   | 7       | <ul style="list-style-type: none"> <li>Monitor output for monitoring safety function faults.</li> </ul>                                                 | o-1                  |
|                | EDM+   | 8       |                                                                                                                                                         |                      |
| Frame ground   | FG     | Shell   | <ul style="list-style-type: none"> <li>Connected to the ground terminal inside the servo driver.</li> </ul>                                             | —                    |

In order to set the safety levels to SIL 3, PL e, DCavg Medium, diagnosis via EDM output is required (max. 3-month diagnostic interval).

Safety levels are SIL 2, PL d, DCavg Low when diagnosis by EDM output is not performed.

## 7.5 Parallel I/O connector X4

### 7.5.1 Input signals (common) and their functions

| Name                 | Symbol | Pin No. | Description                                                                                                                                                                                                                                                                                                                                                                            | I/O signal interface |
|----------------------|--------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| General input common | SI-COM | 7       | <ul style="list-style-type: none"> <li>Connect the positive or negative poles of the external DC power supply (12–24 V).</li> <li>Use a power supply of 12 V <math>\pm 5\%</math> – 24 V <math>\pm 5\%</math>.</li> <li>This must be isolated from the primary power supply. Do not connect it to the same power supply.</li> </ul> Primary power supply: Power supply for motor brake | —                    |
| General input 1      | SI1    | 8       | <ul style="list-style-type: none"> <li>Functions are assigned using parameters. For details, refer to “Technical Reference - Functional Specification”.</li> <li>Be aware that there are restrictions on the assignment of functions. For example, a command pulse inhibit input (INH) can only be allocated to SI10.</li> </ul>                                                       | i-1                  |
| General input 2      | SI2    | 9       |                                                                                                                                                                                                                                                                                                                                                                                        |                      |
| General input 3      | SI3    | 26      |                                                                                                                                                                                                                                                                                                                                                                                        |                      |
| General input 4      | SI4    | 27      |                                                                                                                                                                                                                                                                                                                                                                                        |                      |
| General input 5      | SI5    | 28      |                                                                                                                                                                                                                                                                                                                                                                                        |                      |
| General input 6      | SI6    | 29      |                                                                                                                                                                                                                                                                                                                                                                                        |                      |
| General input 7      | SI7    | 30      |                                                                                                                                                                                                                                                                                                                                                                                        |                      |
| General input 8      | SI8    | 31      |                                                                                                                                                                                                                                                                                                                                                                                        |                      |
| General input 9      | SI9    | 32      |                                                                                                                                                                                                                                                                                                                                                                                        |                      |
| General input 10     | SI10   | 33      |                                                                                                                                                                                                                                                                                                                                                                                        |                      |

### 7.5.2 Input signals (pulse train commands) and their functions

Depending on the specification of the command pulse, it is possible to select the most suitable of the two interfaces.

#### ■ A. Dedicated pulse train interface for line drivers

| Name                  | Symbol | Pin No. | Description                                                                                                                                                                                                                                                                                                                           | I/O signal interface |
|-----------------------|--------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Command pulse input 1 | PULSH1 | 44      | <ul style="list-style-type: none"> <li>Input terminal for the position command pulse. Can be selected by setting the corresponding parameter.</li> <li>Disabled in control modes that do not require position commands, such as velocity control and torque control.</li> <li>Maximum allowable input frequency is 8 Mpps.</li> </ul> | Di-2                 |
|                       | PULSH2 | 45      |                                                                                                                                                                                                                                                                                                                                       |                      |
| Command code input 1  | SIGNH1 | 46      |                                                                                                                                                                                                                                                                                                                                       |                      |
|                       | SIGNH2 | 47      |                                                                                                                                                                                                                                                                                                                                       |                      |

#### ■ B. Pulse train interface

| Name                  | Symbol | Pin No. | Description                                                                                                                                                                                                                                                                                                                                                                                             | I/O signal interface |
|-----------------------|--------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Command pulse input 2 | OPC1   | 1       | <ul style="list-style-type: none"> <li>Input terminal for the position command pulse. Can be selected by setting the corresponding parameter.</li> <li>Disabled in control modes that do not require position commands, such as velocity control and torque control.</li> <li>The maximum allowable input frequency is 500 kpps for line driver input and 200 kpps for open collector input.</li> </ul> | Di-1                 |
|                       | PULS1  | 3       |                                                                                                                                                                                                                                                                                                                                                                                                         |                      |
|                       | PULS2  | 4       |                                                                                                                                                                                                                                                                                                                                                                                                         |                      |
| Command code input 2  | OPC2   | 2       |                                                                                                                                                                                                                                                                                                                                                                                                         |                      |
|                       | SIGN1  | 5       |                                                                                                                                                                                                                                                                                                                                                                                                         |                      |
|                       | SIGN2  | 6       |                                                                                                                                                                                                                                                                                                                                                                                                         |                      |

### 7.5.3 Input signals (analog commands) and their functions

| Name           | Symbol | Pin No. | Description                                                                                                                                                                                                                | I/O signal interface |
|----------------|--------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Analog input 1 | AI1    | 14      | <ul style="list-style-type: none"> <li>Analog input with 16-bit resolution.</li> <li>The maximum allowable input voltage is <math>\pm 10</math> V.</li> <li>The function changes according to the control mode.</li> </ul> | Ai-1                 |
| Analog input 2 | AI2    | 16      | <ul style="list-style-type: none"> <li>Analog input with 12-bit resolution.</li> <li>The maximum allowable input voltage is <math>\pm 10</math> V.</li> <li>The function changes according to the control mode.</li> </ul> | Ai-2                 |
| Analog input 3 | AI3    | 18      | <ul style="list-style-type: none"> <li>Analog input with 12-bit resolution.</li> <li>The maximum allowable input voltage is <math>\pm 10</math> V.</li> </ul>                                                              |                      |

### 7.5.4 Functions that can be allocated to analog inputs

| Analog Input | Name                                  | Symbol | Description                                                                                                                                  |
|--------------|---------------------------------------|--------|----------------------------------------------------------------------------------------------------------------------------------------------|
| AI1          | Velocity command input                | SPR    | <ul style="list-style-type: none"> <li>Velocity command input for velocity control.</li> </ul>                                               |
|              | Torque command input                  | TRQR   | <ul style="list-style-type: none"> <li>Torque command input for torque control (without control mode switching).</li> </ul>                  |
|              | Velocity limit input                  | SPL    | <ul style="list-style-type: none"> <li>Velocity limit input for torque control.</li> </ul>                                                   |
| AI2          | Positive direction torque limit input | P-ATL  | <ul style="list-style-type: none"> <li>Positive direction torque limit input.</li> </ul>                                                     |
|              | Torque command input                  | TRQR   | <ul style="list-style-type: none"> <li>Torque command input for torque control in velocity/torque control switching control mode.</li> </ul> |
| AI3          | Negative direction torque limit input | N-ATL  | <ul style="list-style-type: none"> <li>Negative direction torque limit input.</li> </ul>                                                     |

### 7.5.5 Output signals (common) and their functions

| Name                          | Symbol       | Pin No.  | Description                                                                                                                                                                                                                                                                                                                                                                                    | I/O signal interface |
|-------------------------------|--------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| General-purpose output 1      | SO1-<br>SO1+ | 10<br>11 | <ul style="list-style-type: none"> <li>Functions are allocated using parameters. For details, refer to "Technical Reference - Functional Specification -".</li> </ul>                                                                                                                                                                                                                          | o-1                  |
| General-purpose output 2      | SO2-<br>SO2+ | 34<br>35 |                                                                                                                                                                                                                                                                                                                                                                                                |                      |
| General-purpose output 3      | SO3-<br>SO3+ | 36<br>37 |                                                                                                                                                                                                                                                                                                                                                                                                |                      |
| General-purpose output 4      | SO4-<br>SO4+ | 38<br>39 |                                                                                                                                                                                                                                                                                                                                                                                                |                      |
| General-purpose output 5      | SO5          | 12       | <ul style="list-style-type: none"> <li>Functions are allocated using parameters. For details, refer to "Technical Reference - Functional Specification -".</li> </ul>                                                                                                                                                                                                                          | o-2                  |
| General-purpose output 6      | SO6          | 40       |                                                                                                                                                                                                                                                                                                                                                                                                |                      |
| General-purpose output common | SO-COM       | 41       | <ul style="list-style-type: none"> <li>Connect the negative pole of the external DC power supply (12–24 V).</li> <li>The power supply capacity varies according to the input/output circuit configuration used.</li> <li>This must be isolated from the primary power supply. Do not connect it to the same power supply.</li> </ul> <p>Primary power supply: power supply for motor brake</p> | —                    |

### 7.5.6 Encoder Output Signal/Position Compare Output Signal

| Name                                            | Symbol         | Pin No. | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | I/O signal interface |
|-------------------------------------------------|----------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| A-phase output/<br>position compare<br>output 1 | OA+/<br>OCMP1+ | 21      | <ul style="list-style-type: none"> <li>Differential output of divided feedback scale signal (A/B/Z phase). (RS422 equivalent)</li> <li>The division ratio can be set by the parameters.</li> <li>The ground of the line driver for the output circuit is connected to the signal ground (GND), and kept non-insulated.</li> <li>Maximum output frequency is 4 Mpps (after being multiplied by 4).</li> <li>It can be used as position compare output by setting parameters. For details, refer to "Technical Reference - Functional Specification -".</li> <li>This differential signal should be received by a line receiver (AM26C32 or equivalent), and a terminating resistor (approx. 330 <math>\Omega</math>) should be connected between the line receiver inputs.</li> <li>Use shielded twisted-pair cables for wiring, and connect the shielded wires to the connector shell.</li> </ul> | Do-1                 |
|                                                 | OA-/<br>OCMP1- | 22      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                      |
| B-phase output/<br>position compare<br>output 2 | OB+/<br>OCMP2+ | 48      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                      |
|                                                 | OB-/<br>OCMP2- | 49      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                      |
| Z-phase output/<br>position compare<br>output 3 | OZ+/<br>OCMP3+ | 23      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                      |
|                                                 | OZ-/<br>OCMP3- | 24      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                      |
| Z-phase output/<br>position compare<br>output 4 | CZ/<br>OCMP4   | 19      | <ul style="list-style-type: none"> <li>Z-phase signal output via open collector.</li> <li>The emitter side of the transistor for the output circuit is connected to the signal ground (GND), and kept non-insulated.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Do-2                 |

### 7.5.7 Analog monitor signals and their functions

| Name                  | Symbol | Pin No. | Description                                                                                                                                                                  | I/O signal interface |
|-----------------------|--------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Analog monitor output | IM     | 42      | <ul style="list-style-type: none"> <li>Outputs analog signals for the monitor.</li> <li>The meaning of the output signal changes depending on parameter settings.</li> </ul> | Ao-1                 |
|                       | SP     | 43      |                                                                                                                                                                              |                      |

### 7.5.8 Other

| Name          | Symbol | Pin No.           | Description                                                                                                                                                | I/O signal interface |
|---------------|--------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Frame ground  | FG     | 50,<br>Shell      | <ul style="list-style-type: none"> <li>Connected to the ground terminal inside the servo driver.</li> </ul>                                                | —                    |
| Signal ground | GND    | 13, 15,<br>17, 25 | <ul style="list-style-type: none"> <li>Signal ground.</li> <li>The power supply for control signals (COM-) is isolated inside the servo driver.</li> </ul> | —                    |
| —             | —      | 20                | <ul style="list-style-type: none"> <li>Do not connect anything.</li> </ul>                                                                                 | —                    |

## 7.6 External Scale Connector X5

This connector is only compatible with the multifunction type.

| Name                                                    | Symbol | Pin No. | Description                                                 |
|---------------------------------------------------------|--------|---------|-------------------------------------------------------------|
| Power supply output for external scale                  | EX5V   | 1       | • External scale power supply output (*1) (*2)              |
|                                                         | EX0V   | 2       | • Ground for external scale power supply output (*3)        |
| External scale signal I/O (Serial signal)               | EXPS   | 3       | • Serial signal non-inverted I/O                            |
|                                                         | /EXPS  | 4       | • Serial signal inverted I/O                                |
| External scale signal input (A-/B-/Z-phase signal) (*4) | EXA    | 5       | • A-phase signal non-inverted input                         |
|                                                         | /EXA   | 6       | • A-phase signal inverted input                             |
|                                                         | EXB    | 7       | • B-phase signal non-inverted input                         |
|                                                         | /EXB   | 8       | • B-phase signal inverted input                             |
|                                                         | EXZ    | 9       | • Z-phase signal non-inverted input                         |
|                                                         | /EXZ   | 10      | • Z-phase signal inverted input                             |
| Frame ground                                            | FG     | Shell   | • Connected to the ground terminal inside the servo driver. |

\*1 EX5V of the external scale power supply output is 5 V $\pm$ 5%, 250 mA max.

A customer-supplied external power supply is necessary if using an external scale with a consumption current higher than this.

Also, some external scales may take time to initialize when powering on. In that case, it is possible to adjust the power on wait time, which is a function of the servo driver.

For details, refer to "Technical Reference - Functional Specification".

\*2 If the external scale is powered by an external power supply, the EX5V pin should be open to prevent external voltage from being supplied to this pin.

\*3 The EX0V of the power supply output for external scales is connected to the control circuit ground connected to connector X5.

\*4 Up to 4 Mpps can be received with A/B phase multiplied by 4. However, if the duty ratio of the scale input signal waveform is not 50%, it may not be able to read correctly.


## 7.7 Encoder Connector X6

| Name                                            | Symbol | Pin No. | Description                                                 |
|-------------------------------------------------|--------|---------|-------------------------------------------------------------|
| Power supply output for encoder                 | E5V    | 1       | • Encoder power supply output                               |
|                                                 | E0V    | 2       | • Ground for encoder power supply output (*1)               |
| —                                               | —      | 3       | • Do not connect anything                                   |
|                                                 | —      | 4       | • Do not connect anything                                   |
| Encoder signal I/O (Differential serial signal) | PS     | 5       | • Encoder signal non-inverted I/O                           |
|                                                 | /PS    | 6       | • Encoder signal inverted I/O                               |
| Frame ground                                    | FG     | Shell   | • Connected to the ground terminal inside the servo driver. |

\*1 E0V of the encoder power supply output is connected to the control circuit ground connected to connector X4 inside the servo driver.



## 7.8 I/O Signal Interface

## i-1

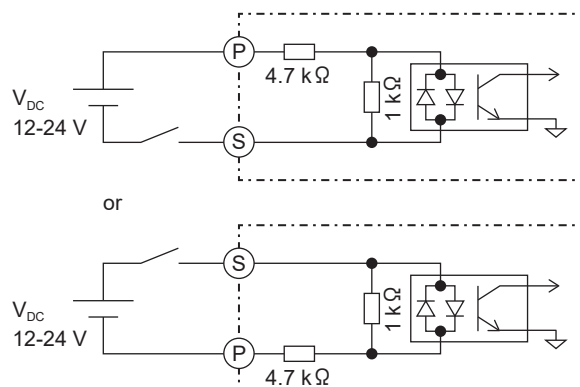


S: [Pins] (X3) 3, 5 / (X4) 8, 9, 26, 27, 28, 29, 30, 31, 32, 33  
P: [Pins] (X3) 4, 6 / (X4) 7

## Ai-1

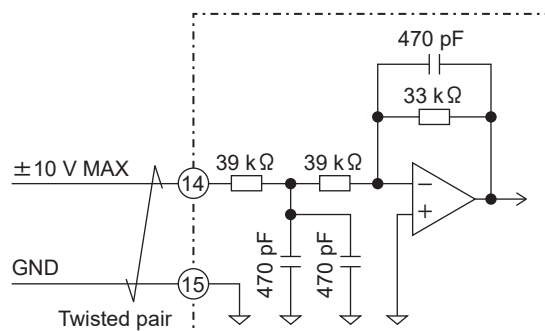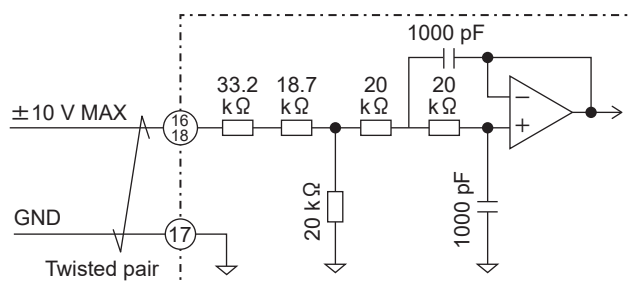**Ai-2**

**o-1**

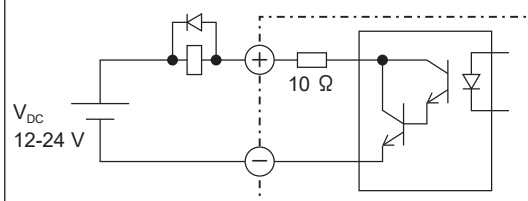


[Pins] +: (X3) 8 / (X4) 11, 35, 37, 39

[Pins] —: (X3) 7 / (X4) 10, 34, 36, 38

\* If the relay is to be driven directly, install a diode in parallel with the relay in the direction shown above.

o-2

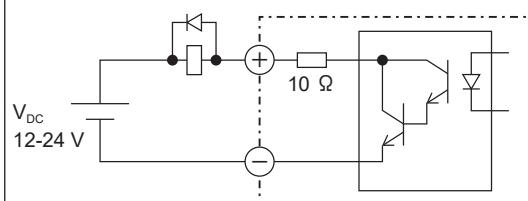


[Pins] + : 40, 12

[Pins] — : 41

\* If the relay is to be driven directly, install a diode in parallel with the relay in the direction shown above.

**Ao-1**

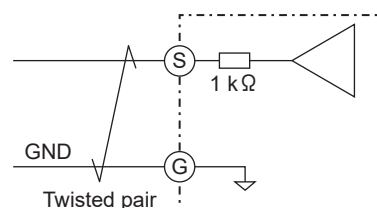


[Pins] S: (X4) 42, 43

[Pins] G: (X4) 13, 17, 25

\* The output signal amplitude is  $\pm 10$  V.


**Di-1**

&lt; Line Driver &gt;


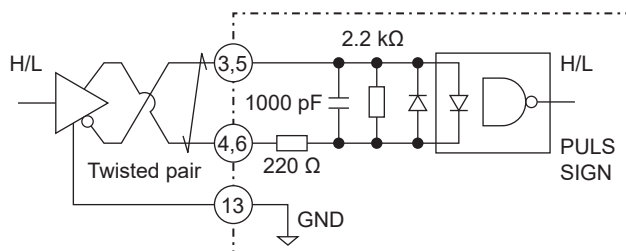


&lt; Open Collector &gt;

(1) 12~24 V Power supply with external resistor

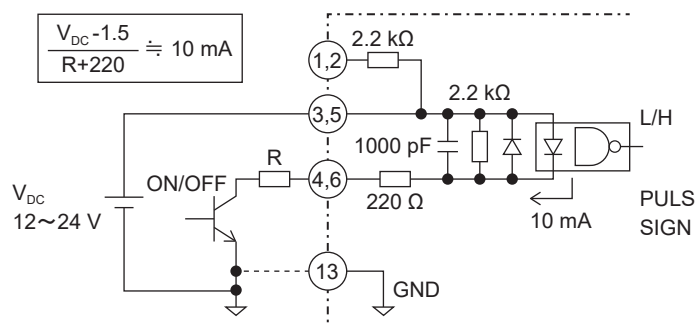

(2) 24V Power supply without external resistor

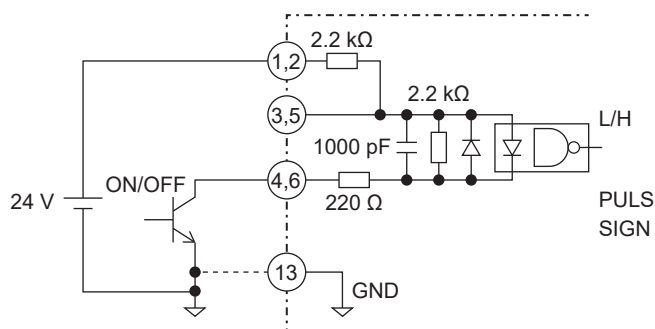
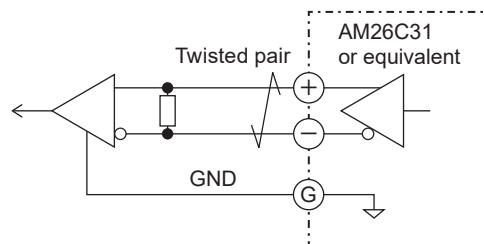
**Do-1**

[Pins] +: (X4) 21, 23, 48

[Pins] -: (X4) 22, 24, 49

[Pins] G: (X4) 13

\* Connect a terminating resistor (approx. 330 Ω) between the line receiver inputs.

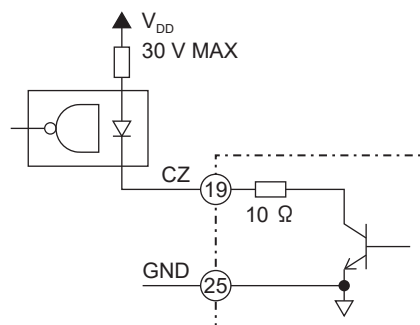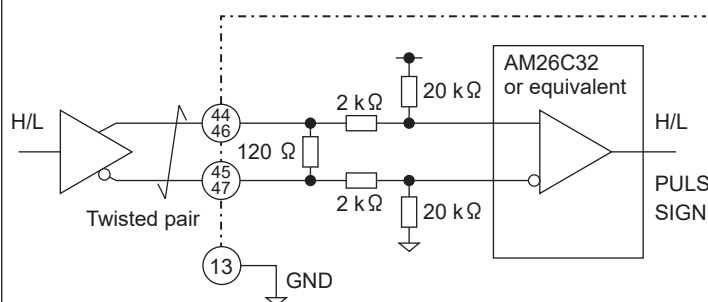**Do-2****Di-2**

## 8 Wiring and System Configuration

### 8.1 Cables Used and Maximum Cable Lengths

| Name                           | Symbol                                                                                     | Maximum wiring length (*1) | Cable(s) used                                                                 |
|--------------------------------|--------------------------------------------------------------------------------------------|----------------------------|-------------------------------------------------------------------------------|
| Main power supply input        | L1, L2, L3                                                                                 | —                          | See “15 Model Specifications”                                                 |
| Control power supply input     | L1C, L2C<br>(100 V / 200 V)                                                                | —                          | See “15 Model Specifications”                                                 |
|                                | 24V, 0V (400 V)                                                                            | —                          | See “15 Model Specifications”                                                 |
| Motor output                   | U, V, W,  | 20 m                       | See “15 Model Specifications”                                                 |
| Ground cable                   |           | —                          | See “15 Model Specifications”                                                 |
| Encoder connection             | X6                                                                                         | 20 m                       | Common shielded twisted-pair wire<br>Core cable: 0.18 mm <sup>2</sup> or more |
| External scale connection (*2) | X5                                                                                         | 20 m                       |                                                                               |
| Parallel I/O connection        | X4                                                                                         | 3 m                        |                                                                               |
| Safety connection (*2)         | X3                                                                                         | 3 m                        | Core cable: 0.18 mm <sup>2</sup> or more                                      |

\*1 The above wiring lengths are the maximum lengths used in Panasonic's evaluation environment. They do not guarantee operation in working environments of customers.

\*2 Only compatible with the multifunction type.

### 8.2 Cable Side Connectors


| Connector symbol | Product Name                | Product number  | Manufacturer                                      |
|------------------|-----------------------------|-----------------|---------------------------------------------------|
| X2               | Connector                   | 2040008-1       | TE Connectivity                                   |
| X3               | Connector                   | 2013595-1       |                                                   |
|                  | Safety bypass plug          | CIF-PB08AK-GF1R | JST                                               |
| X4               | Solder plug (soldered type) | DF02P050F22A1   | Japan Aviation Electronics Industryry, Ltd. (JAE) |
|                  | Plug hood                   | DF02D050B22A    |                                                   |
| X5               | Connector                   | MUF-PK10K-X     | J.S.T. Mfg. Co., Ltd.                             |
| X6               | Receptacle                  | 3E206-0100 KV   | 3M Japan                                          |
|                  | Shell kit                   | 3E306-3200-008  |                                                   |
| XE (*1)          | Connector                   | 5557-04R-210    | Molex Japan                                       |
|                  | Terminal                    | 5556PBTL        |                                                   |

\*1 Only size G is supported.

\* The above product numbers are examples. An equivalent product can be substituted.



8.3.1.2 Size C, D 100 V/200 V

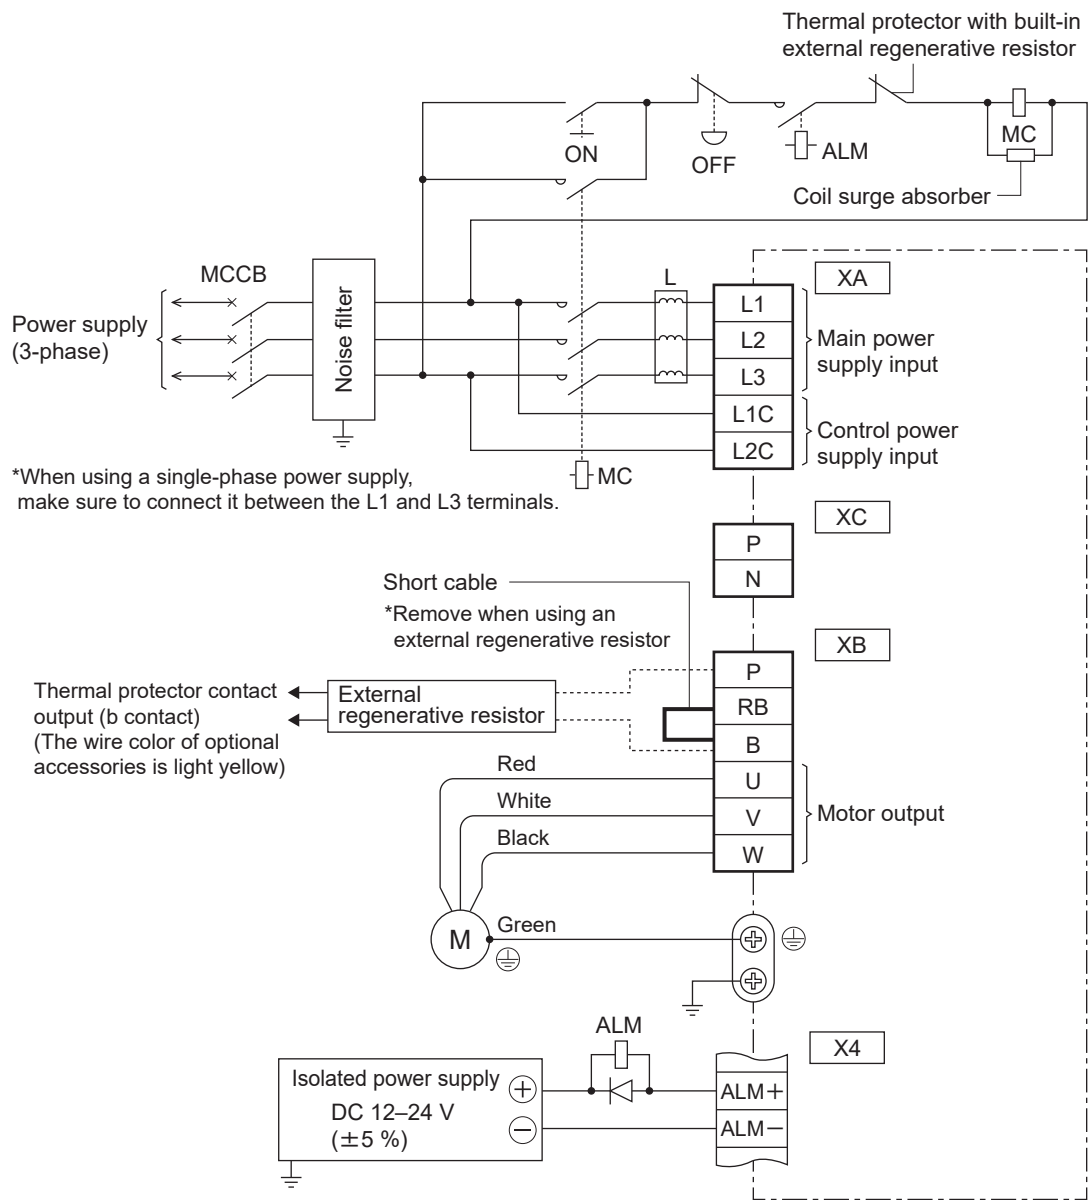


Regenerative resistor connection

| Size             | Short cable (accessory) | Built-in regenerative resistor | Connection of connector XB                                                                                        |                                                       |
|------------------|-------------------------|--------------------------------|-------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
|                  |                         |                                | When using an external regenerative resistor                                                                      | When not using an external regenerative resistor      |
| Size C<br>Size D | Provided                | Provided                       | Between the RB and B: Disconnect the short cable.<br>Between P and B: Connect the external regenerative resistor. | Between RB and B: Short circuit with the short cable. |

- \* Connectors X1–X6 are secondary-side circuits. (See “5 Appearance and Part Names”)
- The primary-side power supply (power supply for the motor brake) must be isolated.
- Do not connect it to the same power supply.
- \* For details, refer to the table in “7.1.2 Size C, D 100 V/200 V” .

8.3.1.3 Size E 200 V

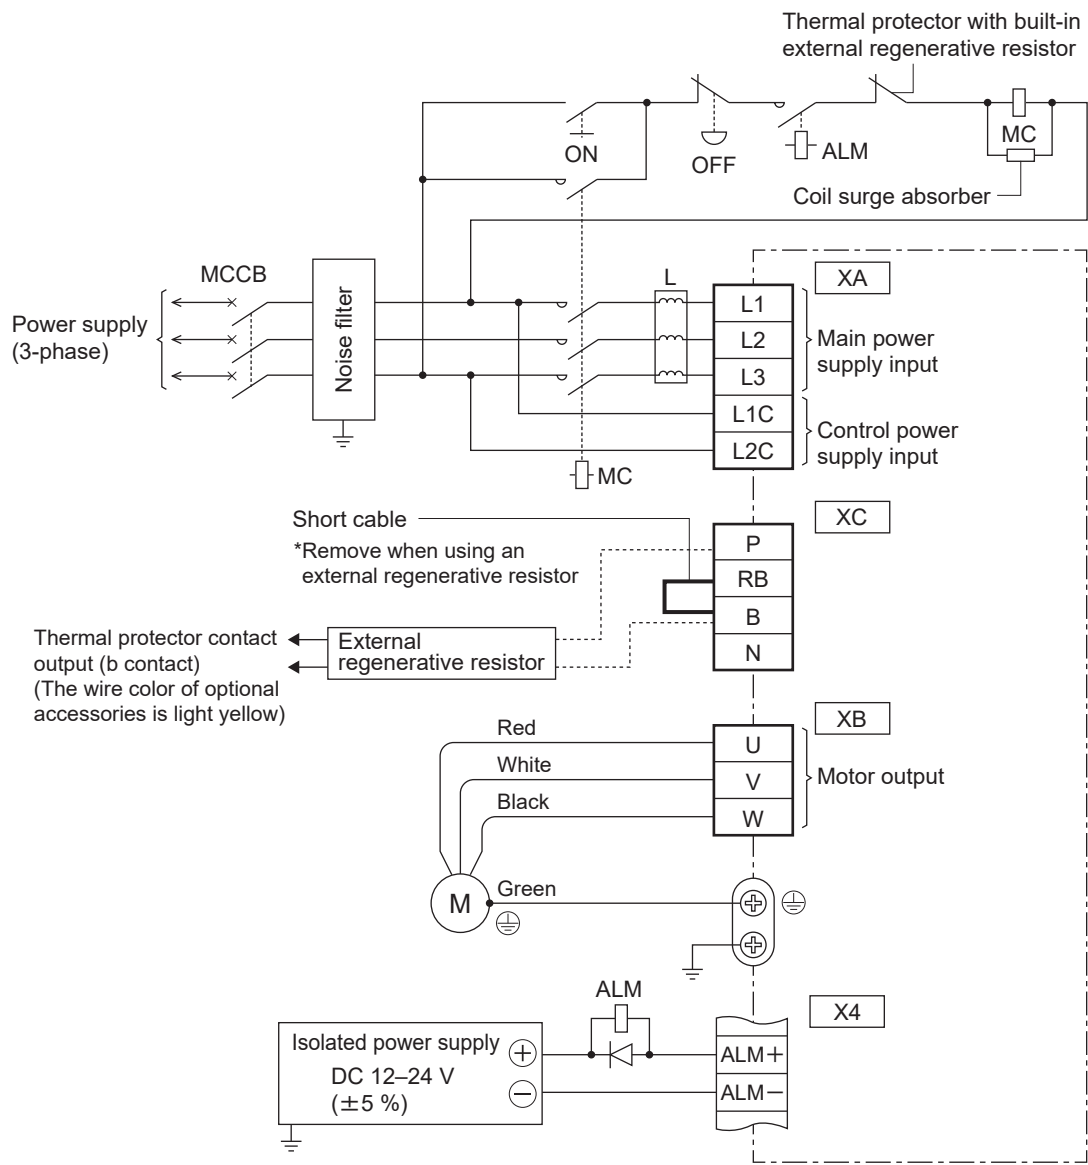


Regenerative resistor connection

| Size   | Short cable (accessory) | Built-in regenerative resistor | Connection of connector XC                                                                                        |                                                       |
|--------|-------------------------|--------------------------------|-------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
|        |                         |                                | When using an external regenerative resistor                                                                      | When not using an external regenerative resistor      |
| Size E | Provided                | Provided                       | Between the RB and B: Disconnect the short cable.<br>Between P and B: Connect the external regenerative resistor. | Between RB and B: Short circuit with the short cable. |

- \* Connectors X1–X6 are secondary-side circuits. (See “5 Appearance and Part Names” )  
The primary-side power supply (power supply for the motor brake) must be isolated.  
Do not connect it to the same power supply.
- \* For details, refer to the table in “7.1.3 Size E 200 V” .

8.3.1.4 Size F 200 V

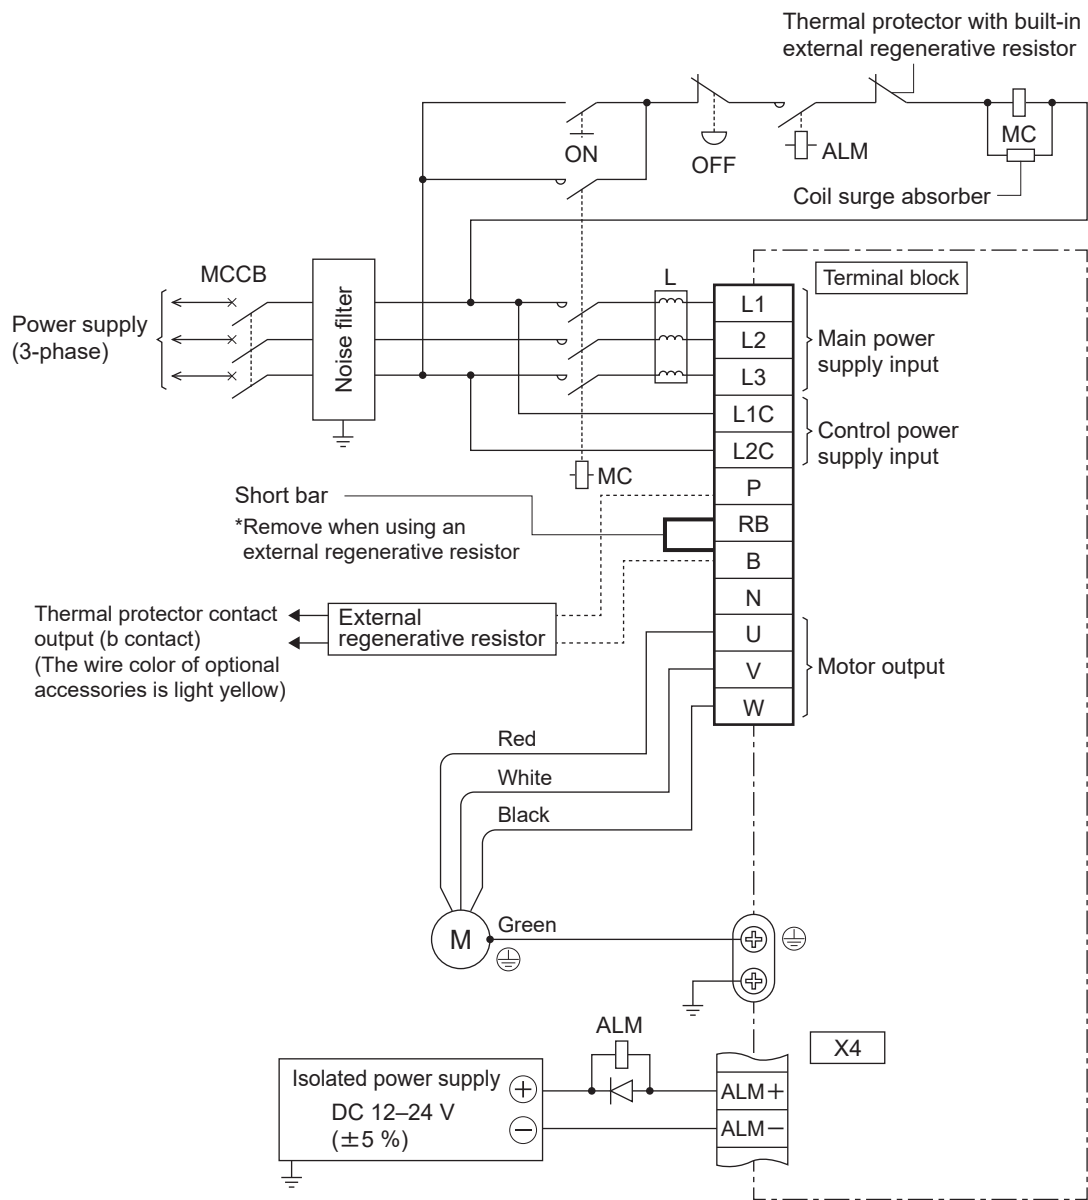


Regenerative resistor connection

| Size   | Short bar (accessory) | Built-in regenerative resistor | Terminal block connection                                                                                   |                                                     |
|--------|-----------------------|--------------------------------|-------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
|        |                       |                                | When using an external regenerative resistor                                                                | When not using an external regenerative resistor    |
| Size F | Provided              | Provided                       | Between RB and B: Disconnect the short bar.<br>Between P and B: Connect the external regenerative resistor. | Between RB and B: Short circuit with the short bar. |

- \* Connectors X1–X6 are secondary-side circuits. (See “5 Appearance and Part Names”)  
The primary-side power supply (power supply for the motor brake) must be isolated.  
Do not connect it to the same power supply.
- \* The capability of the built-in dynamic brake resistor is roughly the maximum allowable inertia when stopped three times consecutively from the rated speed. Failure to do so may cause the resistor to disconnect or the dynamic brake to no longer be operable.
- \* For details, refer to the table in “7.1.4 Size F 200 V”.

### 8.3.1.5 Size G 200 V

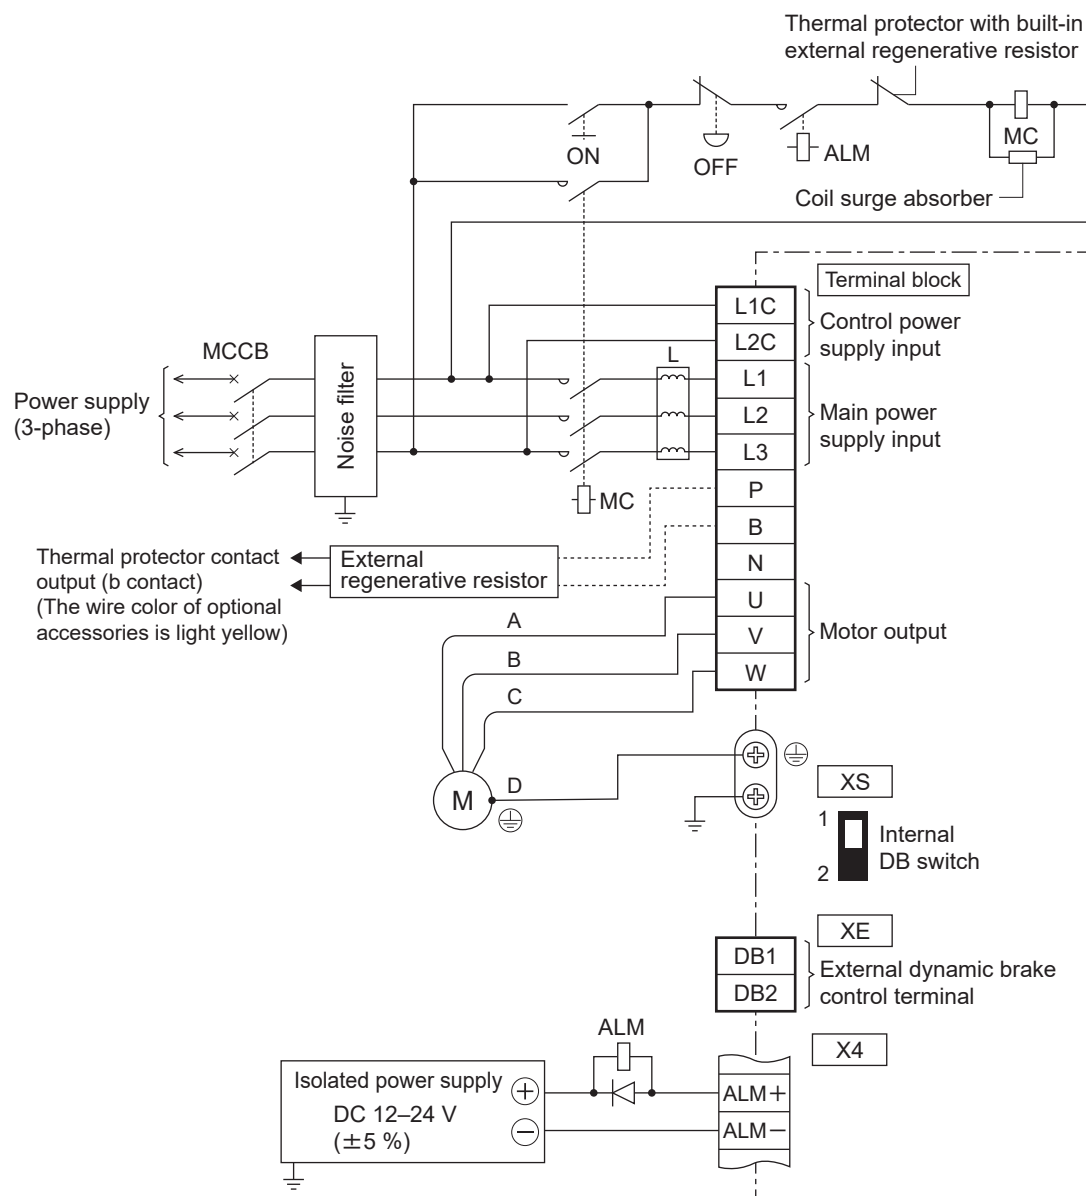

### Regenerative resistor connection


| Size   | Built-in regenerative resistor | Terminal block connection                                    |                                                  |
|--------|--------------------------------|--------------------------------------------------------------|--------------------------------------------------|
|        |                                | When using an external regenerative resistor                 | When not using an external regenerative resistor |
| Size G | None                           | Between P and B: Connect the external regenerative resistor. | Between P and B: Keep open.                      |

- \* Connectors X1–X6 are secondary-side circuits. (See “5 Appearance and Part Names” )  
The primary-side power supply (power supply for the motor brake) must be isolated.  
Do not connect it to the same power supply.
- \* Size G has a built-in dynamic brake. If using the built-in dynamic brake, set switch XS to “1”. (It is set to the “1” side by default.)
- \* The capability of the built-in dynamic brake resistor is roughly the maximum allowable inertia when stopped three times consecutively from the rated speed. Failure to do so may cause the resistor to disconnect or the dynamic brake to no longer be operable.
- \* If the capability of the built-in dynamic brake resistor is exceeded, set switch XS to “2” to use the external dynamic brake resistor.

See external dynamic brake connection examples for connections.


\* For details, refer to the table in “7.1.5 Size G 200 V”.

### Connection example for Size G 200 V external dynamic brake resistor

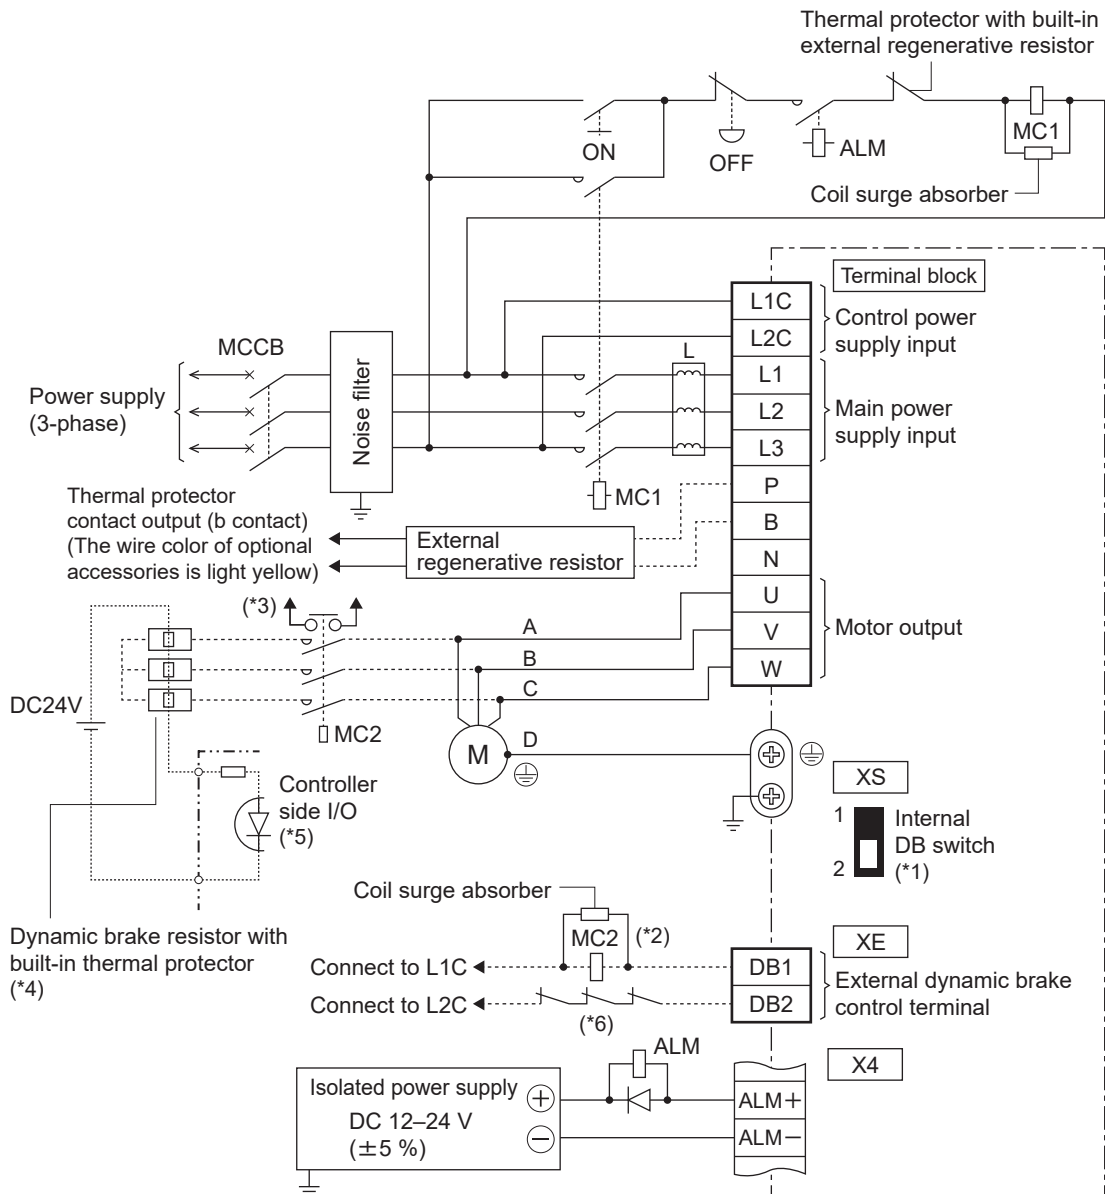

- \*1 If using the external dynamic brake resistor, set switch XS to “2”.
- \*2 The electromagnetic contactor (MC2) must be the same as the electromagnetic contactor (MC1) of the main circuit.
- \*3 If an auxiliary contact is established and the main contact is welded together, configure protection so that the servo is not turned on using an external sequence.
- \*4 Use three dynamic brake resistors of 1.2  $\Omega$  400 W.  
Install the dynamic brake resistor to nonflammable materials such as metal.
- \*5 Install a thermal protector on the dynamic brake resistor and monitor it with the controller side I/O. Configure the protection so that the servo does not turn on in sequence when the thermal protector is operated.
- \*6 If the thermal protector cannot be monitored by the controller side I/O, input the thermal protector output between L2C and DB2 so that the dynamic brake does not operate when temperature protector operates.
- \*7 Use the external dynamic brake resistor when the capability of the built-in dynamic brake resistor is exceeded.
- \*8 Do not use the built-in dynamic brake and external dynamic brake at the same time.
- \*9 For details, refer to the table in “7.1.5 Size G 200 V”.

## 8.3.1.6 Size H 200 V

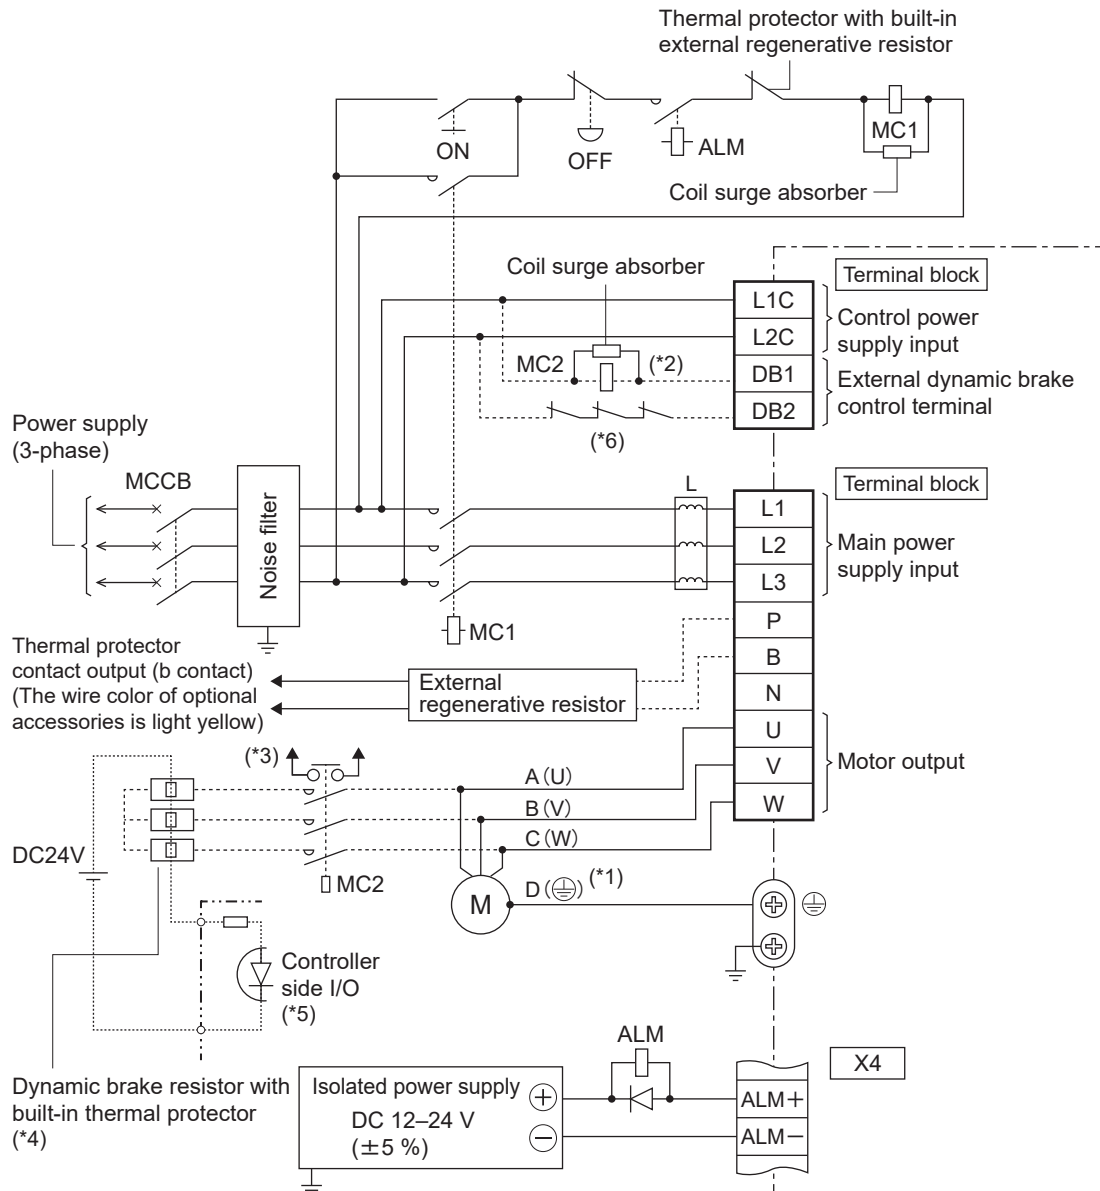


- \*1 The pin number of the connector on the motor side is listed. Only in the case of the 22-kW specification is the connection destination indicated in parentheses.
- \*2 The electromagnetic contactor (MC2) must be the same as the electromagnetic contactor (MC1) of the main circuit.
- \*3 If an auxiliary contact is established and the main contact is welded together, configure protection so that the servo is not turned on using an external sequence.
- \*4 Use three dynamic brake resistors of 1.2  $\Omega$  400 W.  
Install the dynamic brake resistor to nonflammable materials such as metal.
- \*5 Install a thermal protector on the dynamic brake resistor and monitor it with the controller side I/O. Configure the protection so that the servo does not turn on in sequence when the thermal protector is operated.
- \*6 If the thermal protector cannot be monitored by the controller side I/O, input the thermal protector output between L2C and DB2 so that the dynamic brake does not operate when temperature protector operates.
- \*7 For details, refer to the table in [“7.1.6 Size H 200 V”](#).

## Regenerative resistor connection

| Size   | Built-in regenerative resistor | Terminal block connection                                    |                                                  |
|--------|--------------------------------|--------------------------------------------------------------|--------------------------------------------------|
|        |                                | When using an external regenerative resistor                 | When not using an external regenerative resistor |
| Size H | None                           | Between P and B: Connect the external regenerative resistor. | Between P and B: Keep open.                      |

- \* Connectors X1–X6 are secondary-side circuits. (See “5 Appearance and Part Names” )  
The primary-side power supply (power supply for the motor brake) must be isolated.  
Do not connect it to the same power supply.
- \* Because the dynamic brake is not built in, it is in a free-run state when a motor emergency stop occurs.  
Use the external dynamic brake resistor if this could cause a mechanical collision.
- \* The capability of the external dynamic brake resistor is roughly the maximum allowable inertia when stopped three times consecutively from the rated speed. Failure to do so may cause the resistor to disconnect or the dynamic brake to no longer be operable.

## 8.3.1.7 Size E, D 400 V

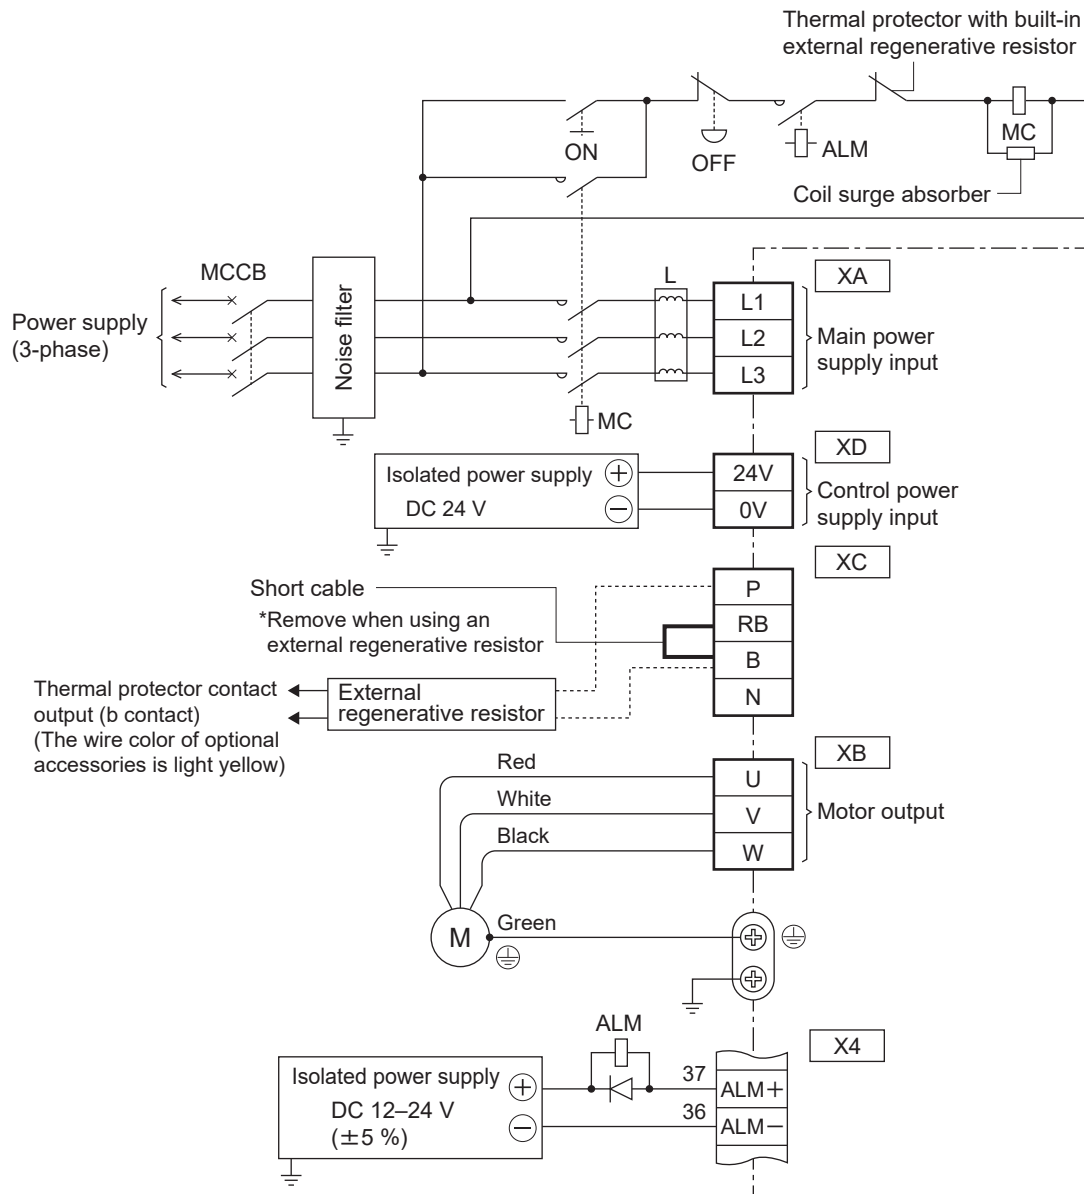

## Regenerative resistor connection

| Size             | Short cable (accessory) | Built-in regenerative resistor | Connection of connector XC                                                                                        |                                                       |
|------------------|-------------------------|--------------------------------|-------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
|                  |                         |                                | When using an external regenerative resistor                                                                      | When not using an external regenerative resistor      |
| Size D<br>Size E | Provided                | Provided                       | Between the RB and B: Disconnect the short cable.<br>Between P and B: Connect the external regenerative resistor. | Between RB and B: Short circuit with the short cable. |


\* Connectors X1–X6 are secondary-side circuits. (See “5 Appearance and Part Names”)

The primary-side power supply (power supply for the motor brake) must be isolated.

Do not connect it to the same power supply.

\* For details, refer to the table in “7.1.7 Size D, E 400 V”.

8.3.1.8 Size F 400 V

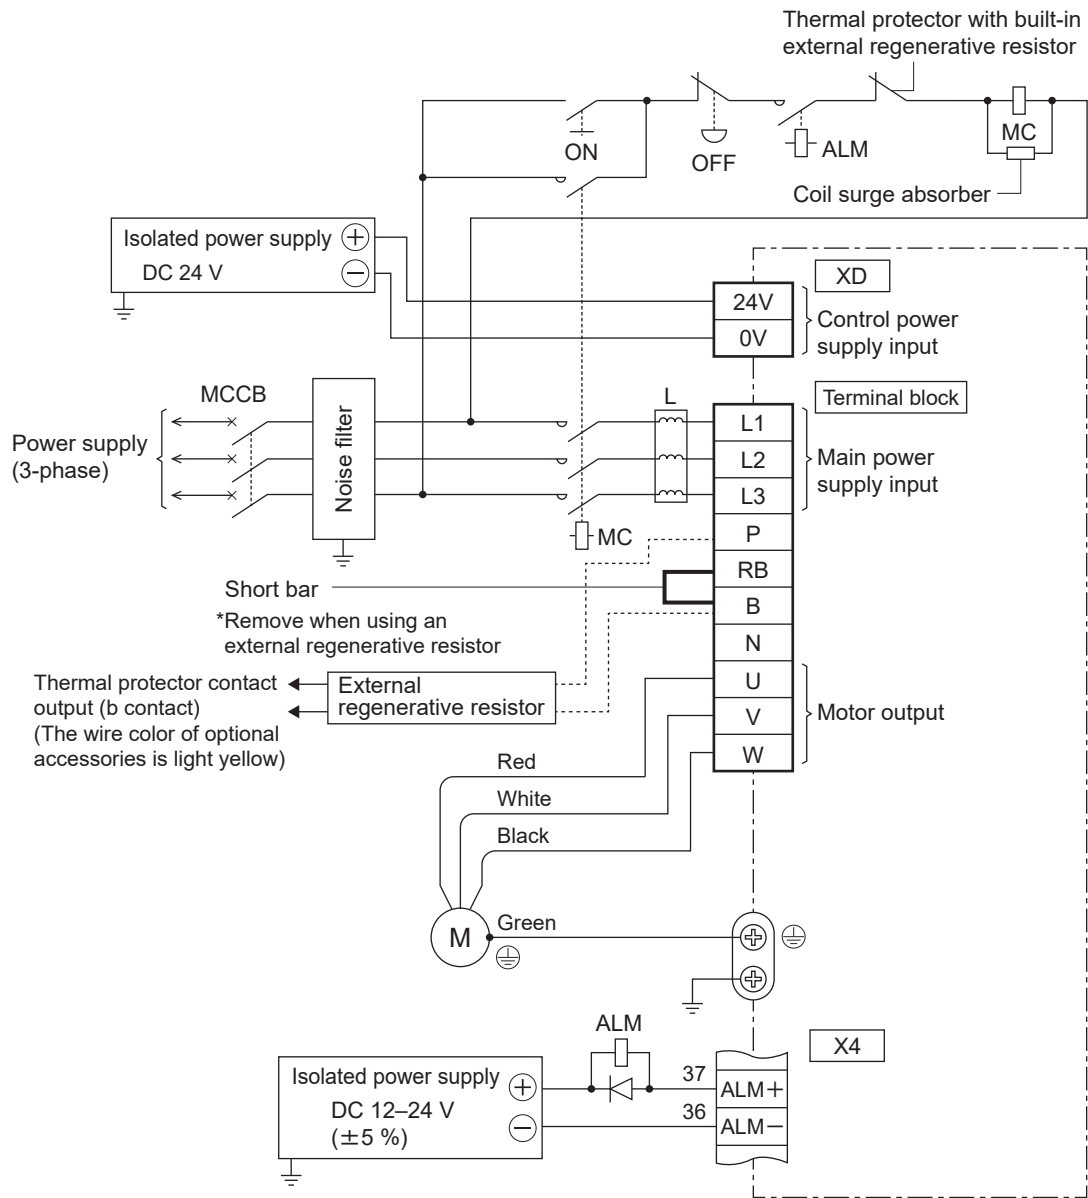

Regenerative resistor connection

| Size   | Short bar (accessory) | Built-in regenerative resistor | Terminal block connection                                                                                   |                                                     |
|--------|-----------------------|--------------------------------|-------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
|        |                       |                                | When using an external regenerative resistor                                                                | When not using an external regenerative resistor    |
| Size F | Provided              | Provided                       | Between RB and B: Disconnect the short bar.<br>Between P and B: Connect the external regenerative resistor. | Between RB and B: Short circuit with the short bar. |

- \* Connectors X1–X6 are secondary-side circuits. (See “5 Appearance and Part Names”)  
The primary-side power supply (power supply for the motor brake) must be isolated.  
Do not connect it to the same power supply.
- \* The capability of the built-in dynamic brake resistor is roughly the maximum allowable inertia when stopped three times consecutively from the rated speed. Failure to do so may cause the resistor to disconnect or the dynamic brake to no longer be operable.
- \* For details, refer to the table in “7.1.8 Size F 400 V”.

### 8.3.1.9 Precautions

- 1 When the servo driver uses a single-phase power supply for sizes A–D, connect the servo driver to main power supply input terminals L1 and L3. Do not connect anything to the terminal L2.
- 2 Insert the connector securely until it is locked.
- 3 Make sure to use an insulation coated crimp terminal when connecting to each terminal on the terminal block. (size F, G, H)
- 4 For models with terminal block covers, the terminal block cover is screwed on.  
When wiring to the terminal block, unscrew these screws to open the cover.  
Tighten the cover fixing screw to 0.19–0.21 N·m.  
Only tighten the terminal block cover 2 (black) of size H to less than 2.0–2.5 N·m of torque.
- 5 Apply the power supply of the voltage indicated on the nameplate.
- 6 Do not reverse-connect the power supply input terminals (L1, L2, and L3) and the motor output terminals (U, V, and W).
- 7 Do not connect the motor output terminals (U, V, and W) to ground or short circuit them.
- 8 Power connectors XA, XB, XC, XD, and the terminal block are supplied with voltage, so do not touch them.  
There is a danger of electric shock.
- 9 The short-circuit current of the power supply used should be capable of not more than 5,000 Arms symmetrical amperes, below the maximum input voltage of the product.  
If the short-circuit current of the power supply exceeds this, limit the short-circuit current by using a currentlimiting device (such as a current-limiting fuse, current-limiting breaker, transformer).
- 10 Unlike an induction motor, an AC servo motor cannot change the rotation direction by exchanging three phases. Make sure to match the motor output terminals (U, V, and W) of the servo driver with the colors (pin number for cannon plugs) of the motor output cables.
- 11 Make sure to connect the grounding terminal of the motor to the grounding terminal of the servo driver and ground it together with the ground terminal of the noise filter. Also ground the machine body. Use a D model ground (grounding resistance: 100  $\Omega$  or less). Tighten the servo driver's ground screw with the appropriate torque specified for each size.  
Use a ground cable with a wire diameter equal to or larger than the wire diameter specified in “Model Specifications”.  
Also, avoid direct contact between aluminum and copper to avoid the effects of electrolytic corrosion.
- 12 Insert surge absorbing circuits for preventing noise to electromagnetic contactors placed around the servo driver, to coils between relay contact points, and to the brake windings of motors with a brake.
- 13 Install a molded case circuit breaker (MCCB) and make sure to shut off the power supply from outside the servo driver in case of an emergency.  
When using a residual current device, use one with countermeasures for high frequencies.
- 14 Install a noise filter to reduce terminal noise voltage.
- 15 The power supply for the brake of motors with a brake must be supplied by the customer.
- 16 Ensure that voltage is applied to the power supply only after wiring has been completed.
- 17 Regarding external regenerative resistors:
  - Sizes A, B, G and H do not have built-in regenerative resistors.
  - Sizes C, D, E, and F have built-in regenerative resistors which are activated by shorting between RB and B.
  - If tripping occurs due to a regenerative overload protection error (Err18.0), an external regenerative resistor must be installed. For external regenerative resistors, remove the short cable or short bar between RB and B and connect it between the P and B terminals. In addition, parameters must be used for regenerative resistor settings.

For details, refer to “Technical Reference - Functional Specification”.

- The following resistors are recommended as external regenerative resistors:

| Size | Input power supply voltage |                                              |                            |
|------|----------------------------|----------------------------------------------|----------------------------|
|      | Single-phase 100 V         | Single-phase 200 V/3-phase 200 V             | 3-phase 400 V              |
| A    | DV0P4280                   | DV0P4281 (100 W or less)<br>DV0P4283 (200 W) | —                          |
| B    | DV0P4283                   | DV0P4283                                     |                            |
| C    | DV0P4282                   | DV0P4283                                     |                            |
| D    | —                          | DV0P4284                                     | DV0PM20048                 |
| E    |                            | Two DV0P4284 in parallel<br>or one DV0P4285  | DV0PM20049                 |
| F    |                            | Two DV0P4285 in parallel                     | Two DV0PM20049 in parallel |
| G    | —                          | Three DV0P4285 in parallel                   | —                          |
| H    | —                          | Six DV0P4285 in parallel                     | —                          |

\* Manufacturer: Iwaki Musen Kenkyusho

| Panasonic prod-<br>uct number | Manufacturer<br>product num-<br>ber | Specifications      |                              |          | Built-in thermal protector (*2)<br><br>Operating temperature                                                                        |
|-------------------------------|-------------------------------------|---------------------|------------------------------|----------|-------------------------------------------------------------------------------------------------------------------------------------|
|                               |                                     | Resistance<br>value | Rated power (reference) (*1) |          |                                                                                                                                     |
|                               |                                     |                     | Free air                     | Fan used |                                                                                                                                     |
|                               |                                     | Ω                   | [W]                          | [W]      |                                                                                                                                     |
| DV0P4280                      | RF70M                               | 50                  | 10                           | 25       | 140 ± 5 °C<br>B contact<br>Open/close capacity (resistive<br>load)<br>1 A, AC 125 V, 6,000 cycles<br>0.5 A, AC 250 V, 10,000 cycles |
| DV0P4281                      | RF70M                               | 100                 | 10                           | 25       |                                                                                                                                     |
| DV0P4282                      | RF180B                              | 25                  | 17                           | 50       |                                                                                                                                     |
| DV0P4283                      | RF180B                              | 50                  | 17                           | 50       |                                                                                                                                     |
| DV0P4284                      | RF240                               | 30                  | 40                           | 100      |                                                                                                                                     |
| DV0P4285                      | RH450F                              | 20                  | 52                           | 130      |                                                                                                                                     |
| DV0PM20048                    | RF240TF                             | 120                 | 35                           | 80       |                                                                                                                                     |
| DV0PM20049                    | RH450FTF                            | 80                  | 65                           | 190      |                                                                                                                                     |

\*1 Available power without running the built-in thermal protector

\*2 Each regenerative resistor has built-in thermal fuse and thermal protector for safety.

- When using a thermal protector, configure the circuit to turn off the power supply.

(See “8 Wiring and System Configuration”)

- The built-in thermal fuse may break due to heat dissipation conditions, operating temperature range, power supply voltage, or load fluctuation.


When operating in conditions where the regenerative resistor is likely to generate heat (e.g., when the power supply voltage is high, when load inertia is large, when deceleration times are short), incorporate it into the device to ensure that the surface temperature of the regenerative resistor remains at  $100^{\circ}\text{C}$  or less and confirm the operation thereof.

- Install the regenerative resistor to nonflammable materials such as metal.
- Install the regenerative resistor so that it cannot be touched directly, such as by covering it with non-combustible material.
- Sections which can be touched directly should be kept to less than  $70^{\circ}\text{C}$ .

8.3.1.10 How to wire to the power connector


Follow the procedure below to wire to connectors XA, XB, XC and XD .

- 1 Strip the wires to be used. Refer to the figure below for the stripping length.



| Size                      | Connector  | L [mm] |
|---------------------------|------------|--------|
| Sizes A - C, Size D 200 V | XA, XB     | 10 mm  |
| Size D 400 V, Size E      | XA, XB, XC | 11 mm  |
| Sizes D - F 400 V         | XD         | 8 mm   |

- 2 Insert the wire into the connector.

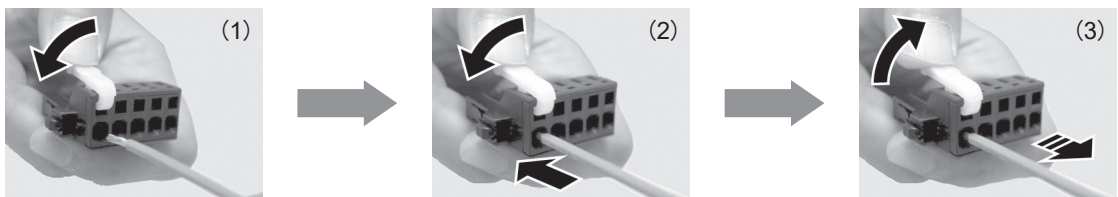

- (1) Push down the spring by pushing the control lever attached to the upper operating slot with your fingers.
- (2) Insert the wire while pressing the control lever.  
\* Ensure that all strands are inserted into the spring opening.
- (3) Wire it by releasing the control lever. Pull the wire lightly to make sure that the wire is securely connected.

Precautions

- Be careful not to damage or cut the core cable when stripping the wire.
- Because the stripping length of the electric wire will depend on the size and type of electric wire, decide the optimal stripping length based on processing conditions.
- When wiring, disconnect the connector from the servo driver main body.
- Insert one wire into one wire insertion slot of the connector.
- Push down the control lever to remove the wire.

### 8.3.2 Wiring to Connector X4


- 1 The customer is required to prepare provide a DC 12 - 24 V control signal power supply for external control to be connected to between SI-COM and SO-COM.

It must be isolated from the primary power supply (motor brake power supply).

Do not connect it to the same power supply.

- 2 Install peripheral devices as close to the servo driver as possible to minimize the wiring length (within 3 m).
- 3 Keep the cables as far away from the wiring of the power lines (L1, L2, L3, L1C, L2C, U, V, W,  $\ominus$ ) as possible (at least 30 cm). Do not put them in the same duct or bind them together.

#### 8.3.2.1 Control input

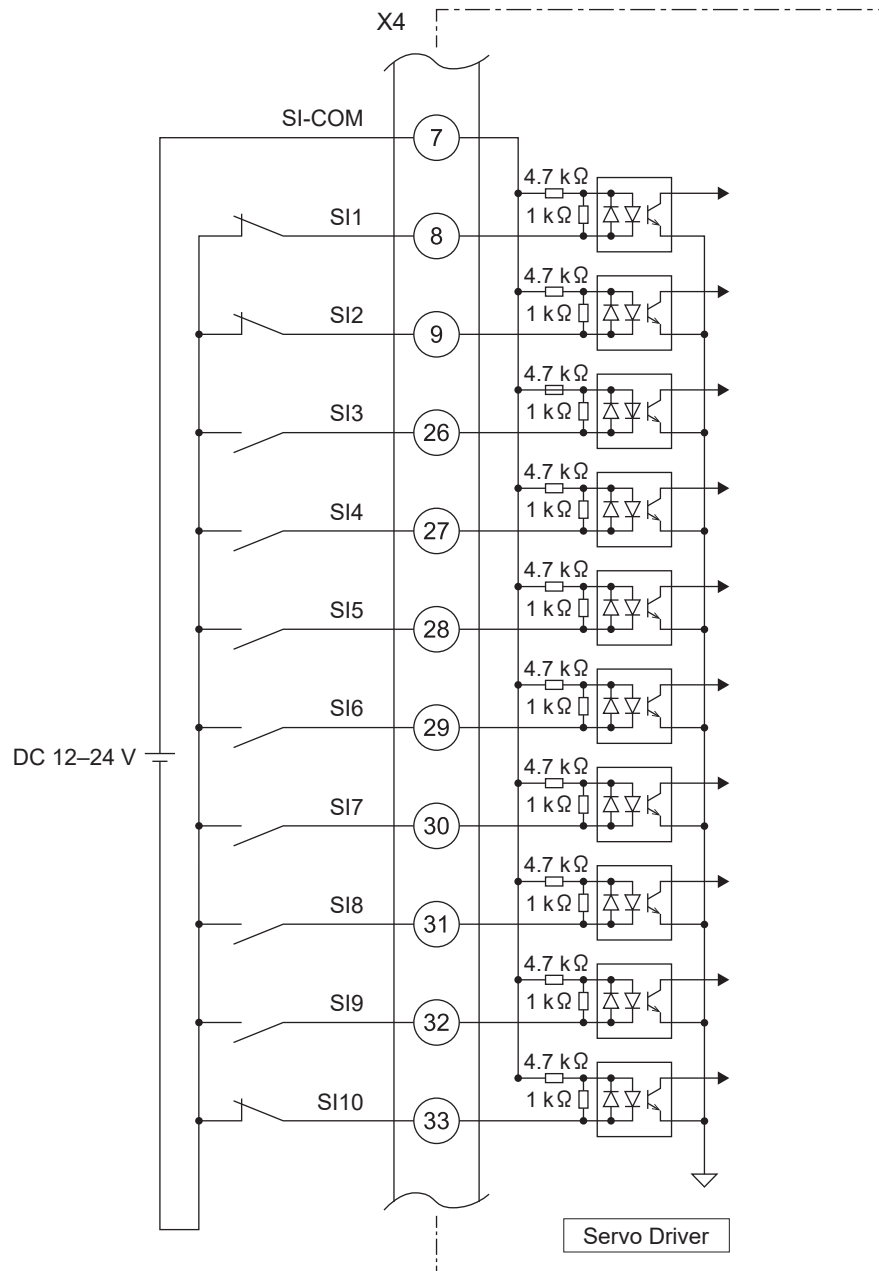


The functions of SI1 to SI10 are assigned using parameters.

For details, refer to “Technical Reference - Functional Specification”.

### 8.3.2.2 Control output

- 1 Be aware of the polarity of the power supply for control signals. Polarity connections contrary to the figure shown above can damage the servo driver.
- 2 If the relay is to be driven directly by the output signal, install a diode in parallel with the relay in the direction shown below. Failure to install a diode or installing it in the opposite direction will damage the servo driver.
- 3 When each output signal is received by a logic circuit such as a gate, ensure that it is not affected by noise.
- 4 The current to be passed through each output must not exceed a rated current of 40 mA, a maximum current of 50 mA, or an inrush current of 90 mA.
- 5 The output circuit is equipped with a limiting resistor (10  $\Omega$ ).

Also, because the output transistor is a Darlington connection, voltage  $V_{CE(SAT)}$  is approx. 1 V between the collector and emitter when the transistor is on, meaning that direct connections are not possible due to the fact that  $V_{IL}$  cannot be satisfied with a normal TTL IC.

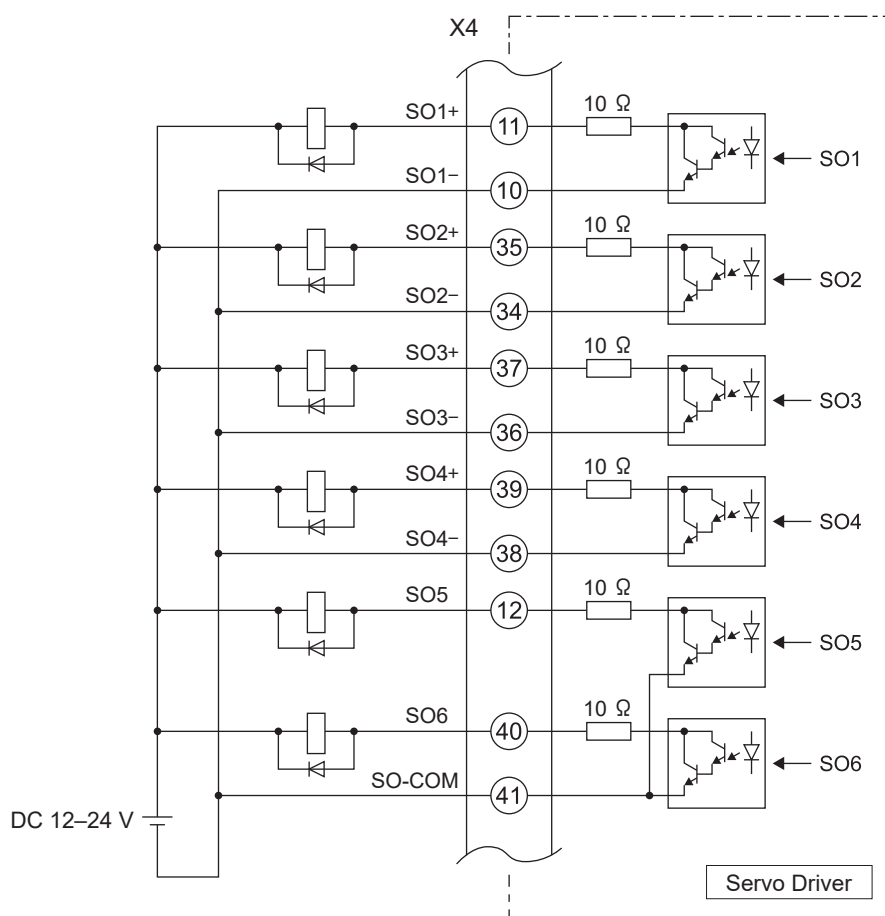


The functions of SO1 to SO6 are assigned using parameters.

For details, refer to “Technical Reference - Functional Specification”.


### 8.3.2.3 Analog Signal Input

A simple command circuit constructed using a variable resistor (VR) and a resistor (R) is shown in the figure below.

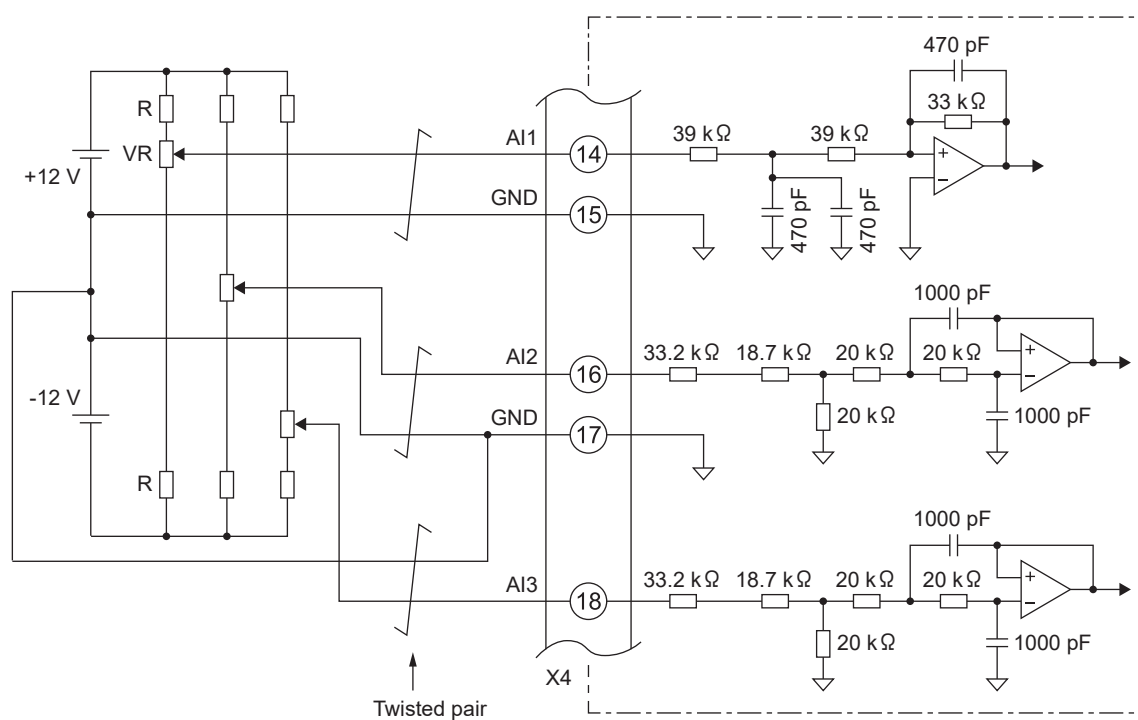

### 8.3.2.4 Pulse Train Command

#### ■ A.Dedicated pulse train interface for line drivers

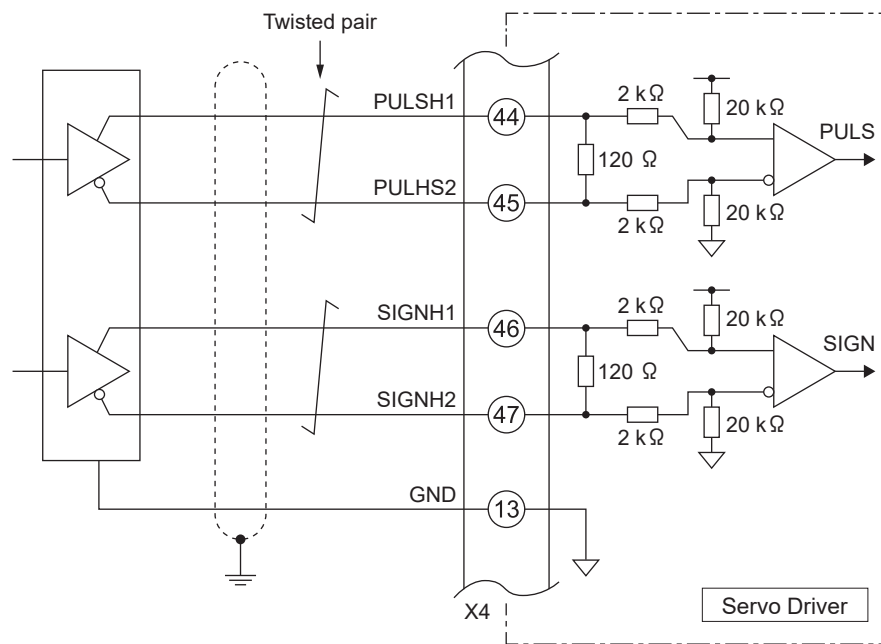


#### ■ B.Pulse train interface

The pulse train command input supports both line driver and open collector interfaces, but we recommend using a line driver interface as shown in the figure below in order to improve signal transmission reliability.

Be aware that the line driver and open collector interfaces differ in terms of how they are wired to the servo driver.

##### ● Line driver interface

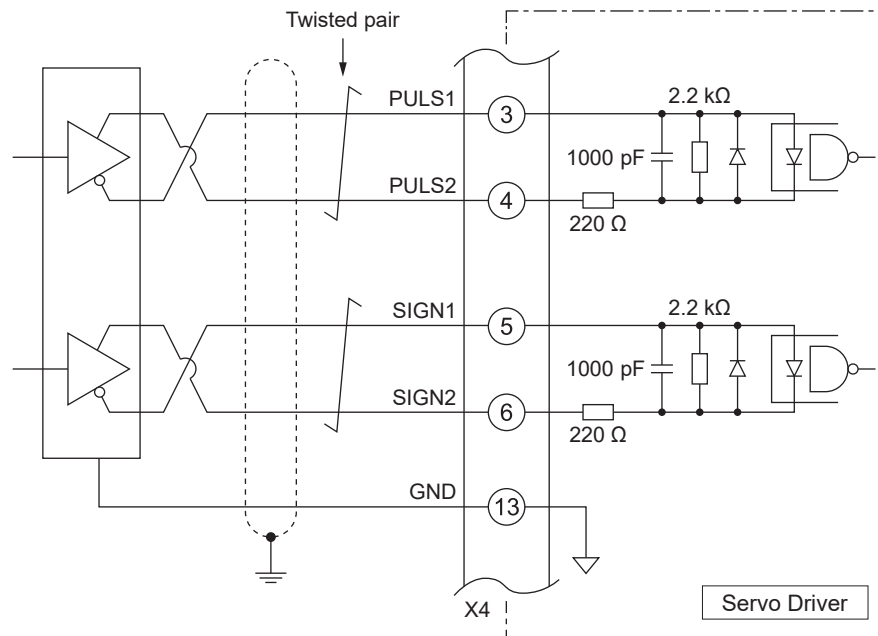


#### Precautions

- Line driver allowable output voltage range:  $3.1\text{ V} \leq V_{OH} - V_{OL} \leq 4.7\text{ V}$


If the above formula is not satisfied, the input signal may be disrupted and the servo motor may operate erratically.

- Open Collector Interface

1 If external resistors are used with a 12–24 V power supply

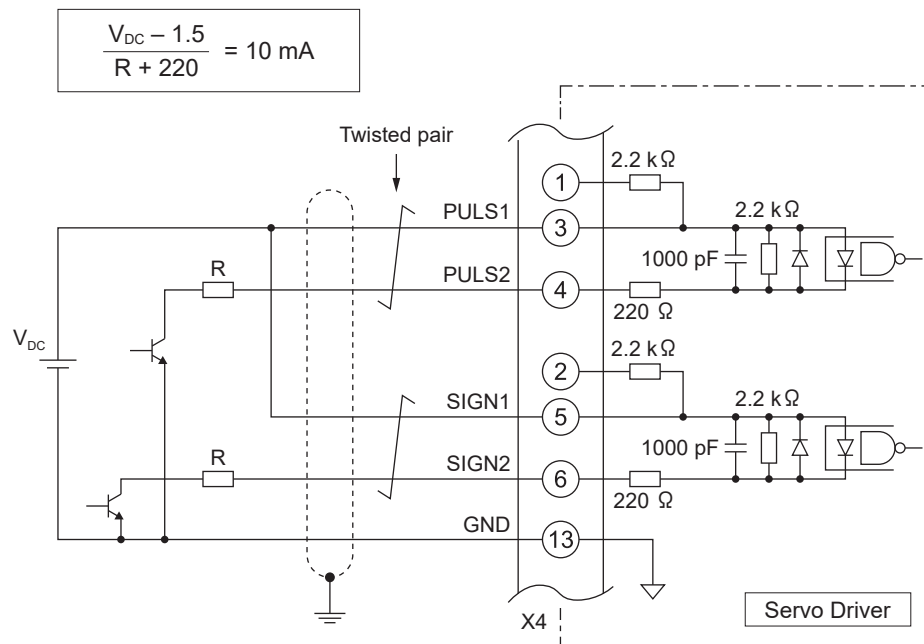



2 If external resistors are not used with a 24 V power supply

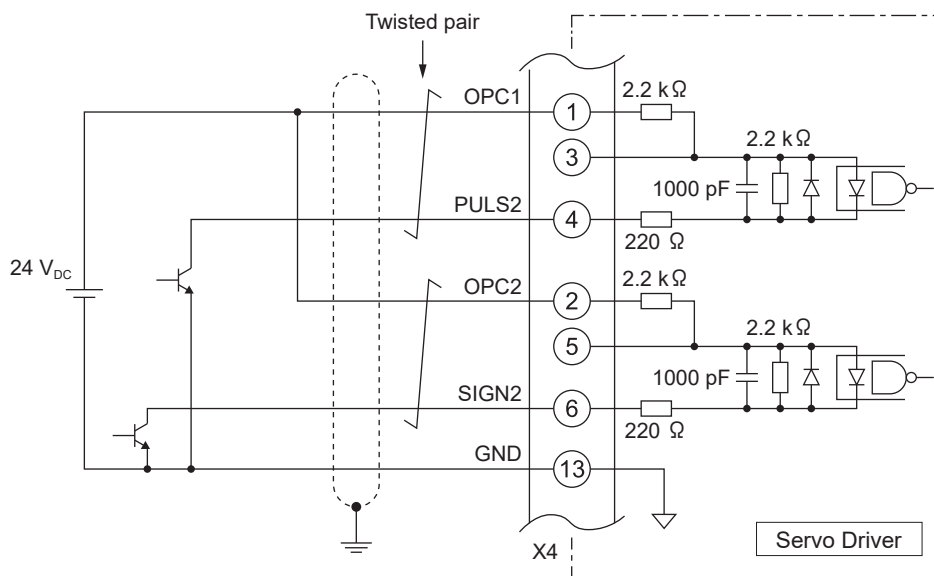

### Precautions for setting the command pulse input as an open collector interface

- Use a short wire (1 m or less).
- Be aware that the maximum pulse frequency when set as an open collector interface is 200 kpps, less than that of the line driver interface (500 kpps).

### 8.3.2.5 Encoder Output Signal/Position Compare Output Signal

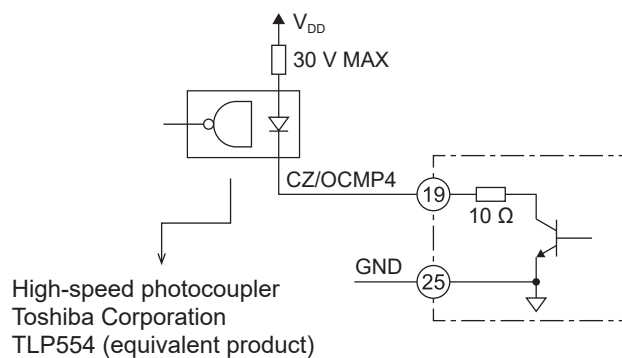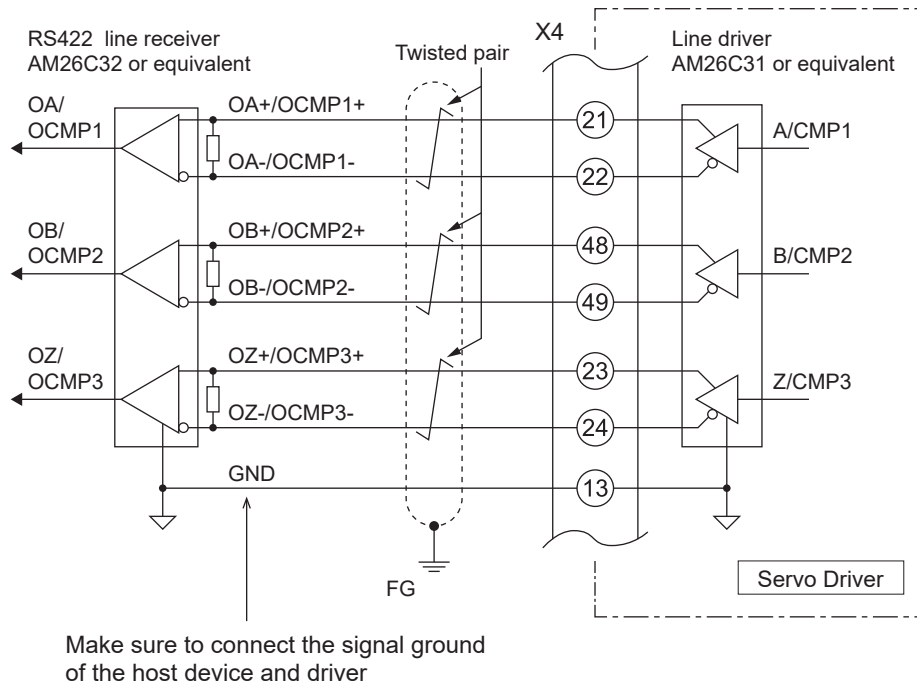


#### Precautions

- Only Z-phase signals are output to pin 19 (CZ) for the open collector as well as being output by the line driver. When using this CZ signal, ensure that it is not affected by noise.
- Use a line receiver (AM26C32 or equivalent) to receive output pulse.  
Ensure that an appropriate terminating resistor is installed between the line receiver inputs.
- Note that in the Z-phase signal output, the logic is inverted for the line driver output (OZ) and the open collector output (CZ).
- Use at a maximum output frequency of 4 Mpps (after being multiplied by 4) or less.

### 8.3.3 Wiring to Connector X5

- 1 Only compatible with the multifunction type.
- 2 The core cable of the external scale cable should be a strand wire of  $0.18 \text{ mm}^2$  or more. Use a common shielded twisted-pair wire.
- 3 The maximum cable length is 20 m. For long wiring lengths, double wiring is recommended for the 5 V power supply to reduce the effects of voltage drops.
- 4 Connect the outer sheath of the shielded wire on the motor side to the shield of the shielded wire from the external scale. Make sure to connect the sheath of the shielded wire on the servo driver side to the X5 shell (FG).
- 5 Keep the cables as far away from the wiring of the power lines (L1, L2, L3, L1C, L2C, U, V, W,  $\oplus$ ) as possible (at least 30 cm). Do not put them in the same duct or bind them together.
- 6 Do not connect anything to the empty terminals of X5.
- 7 The maximum power supply that can be supplied from X5 is  $5 \text{ V} \pm 5\%$  250 mA. A customer-supplied power supply is necessary if using an external scale with a consumption current higher than this. Also, some external scales may take time to initialize when powering on. Create a design that achieves the desired operation timing after power is turned on.
- 8 If the external scale is powered by an external power supply, the EX5V pin should be open to prevent external voltage from being supplied to this pin. In addition, connect the 0 V (GND) of the external power supply with EX0V (X5, pin no. 2) of the driver to obtain the same electric potential.

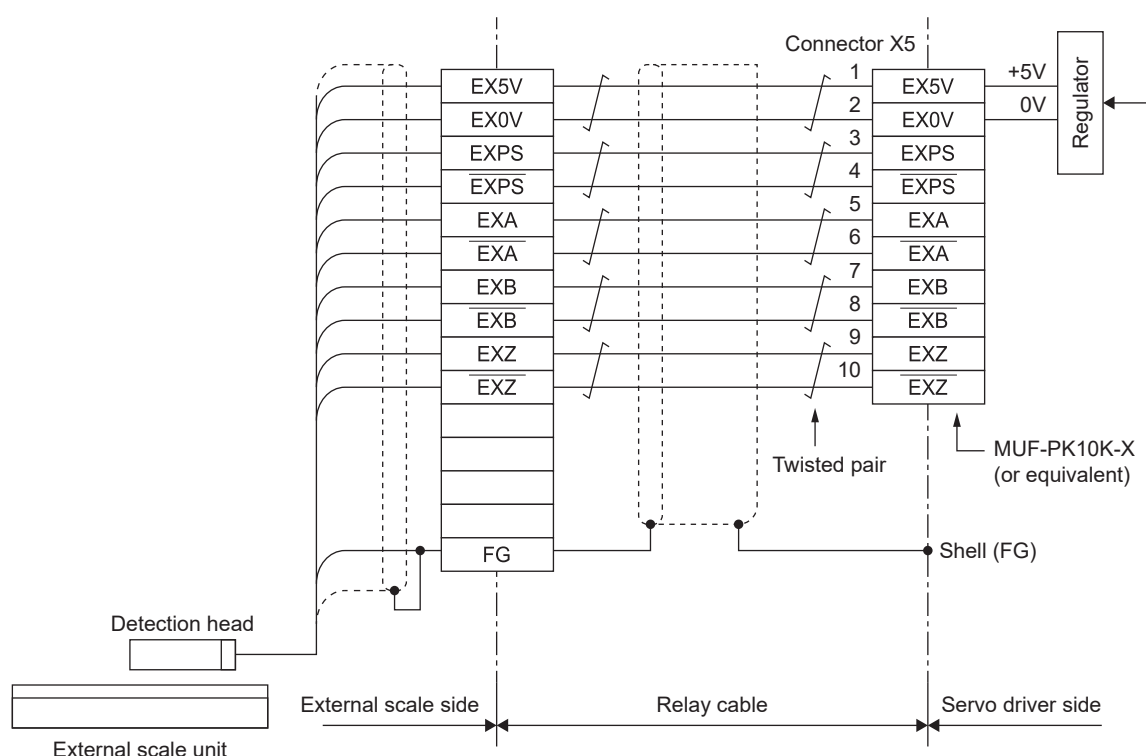

### 8.3.4 Wiring to Connector X6

- 1 Use an encoder connector cable in which the strands are common shielded twisted-pair wires whose core is 0.18 mm<sup>2</sup> or more.
- 2 The maximum cable length is 20 m. For long wiring lengths, double wiring is recommended for the 5 V power supply to reduce the effects of voltage drops.
- 3 Connect the outer sheath of the shielded wire on the motor side to the shield of the shielded wire from the encoder. Make sure to connect the sheath of the shielded wire on the servo driver side to the X6 shell (FG).
- 4 Keep the cables as far away from the wiring of the power lines (L1, L2, L3, L1C, L2C, U, V, W,  $\oplus$ ) as possible (at least 30 cm). Do not put them in the same duct or bind them together.
- 5 Do not connect anything to the empty terminals of X6.

#### 8.3.4.1 If not using multi-turn data


- \* When used as an incremental encoder
- \* When used as a single-turn absolute encoder

#### Lead wire type

MSMF 50 W - 1000 W

MHMF 50 W - 1000 W

MQMF 100 W - 400 W

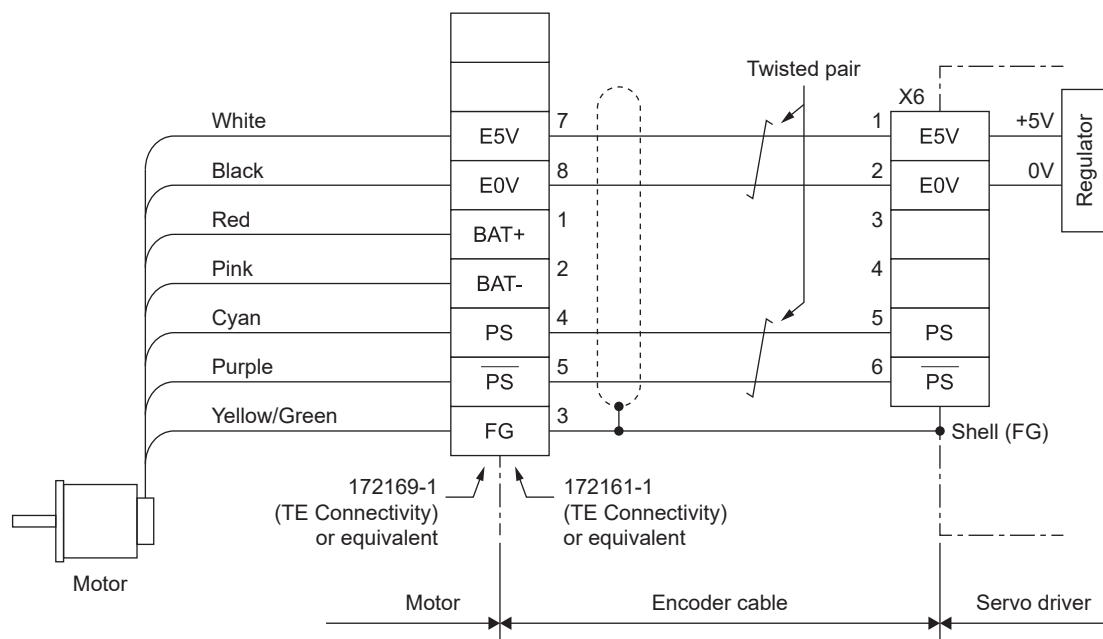


**Connector type**

MSMF 50 W - 1000 W

MHMF 50 W - 1000 W

MQMF 100 W - 400 W

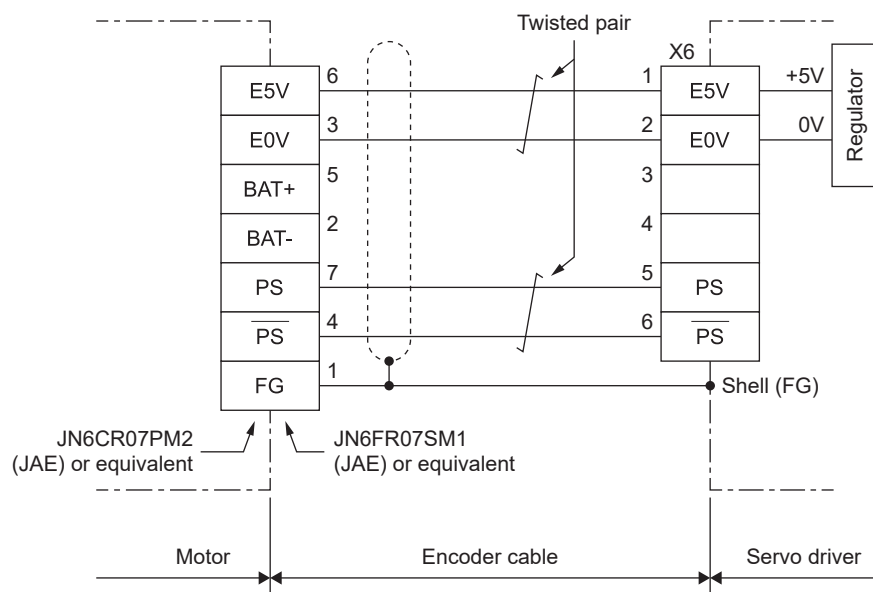


MSMF 1.0 kW - 5.0 kW

MHMF 1.0 kW - 5.0 kW

MDMF 1.0 kW - 5.0 kW

MGMF 0.85 kW - 4.4 kW

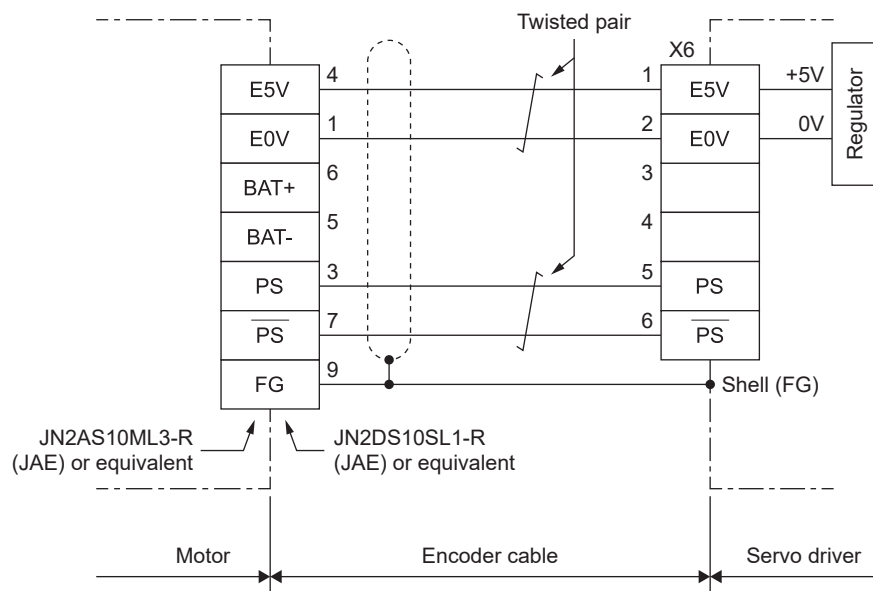


**Cannon plug type**

MSMF 1.0 kW - 5.0 kW

MHMF 1.0 kW - 7.5 kW

MDMF 1.0 kW - 22.0 kW

MGMF 0.85 kW - 5.5 kW

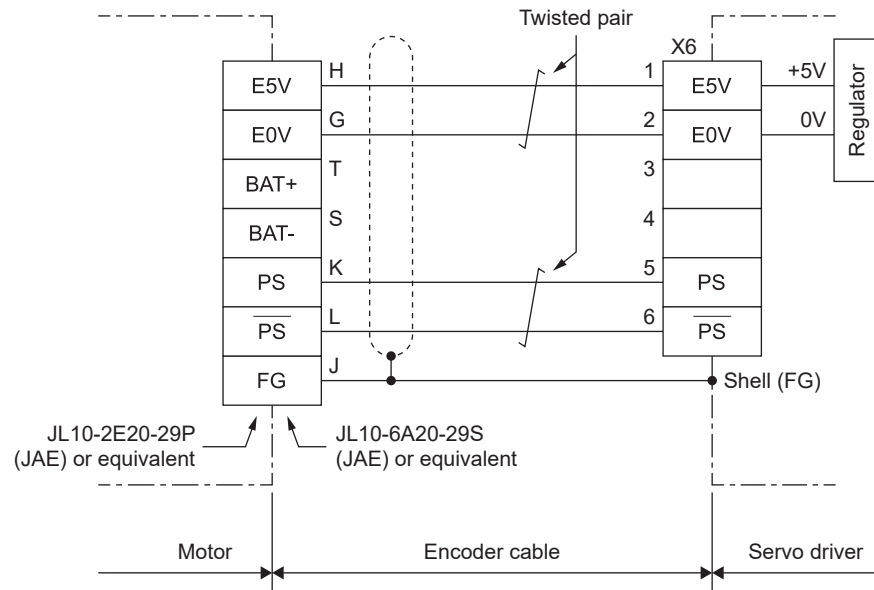
**Right-angle cannon plug type**

MSMF 1.0 kW - 5.0 kW (400 V)

MHMF 1.0 kW - 5.0 kW (400 V)

MDMF 1.0 kW - 5.0 kW (400 V)

MGMF 0.85 kW - 4.4 kW (400 V)

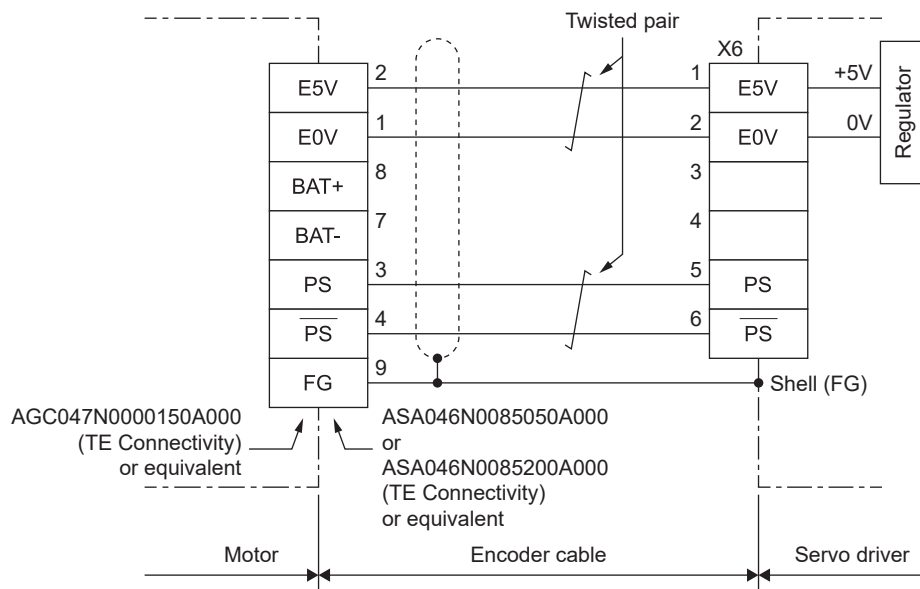

### 8.3.4.2 Using multi-turn data


\* When building an absolute system

#### Lead wire type

MSMF 50 W - 1000 W

MHMF 50 W - 1000 W

MQMF 100 W - 400 W

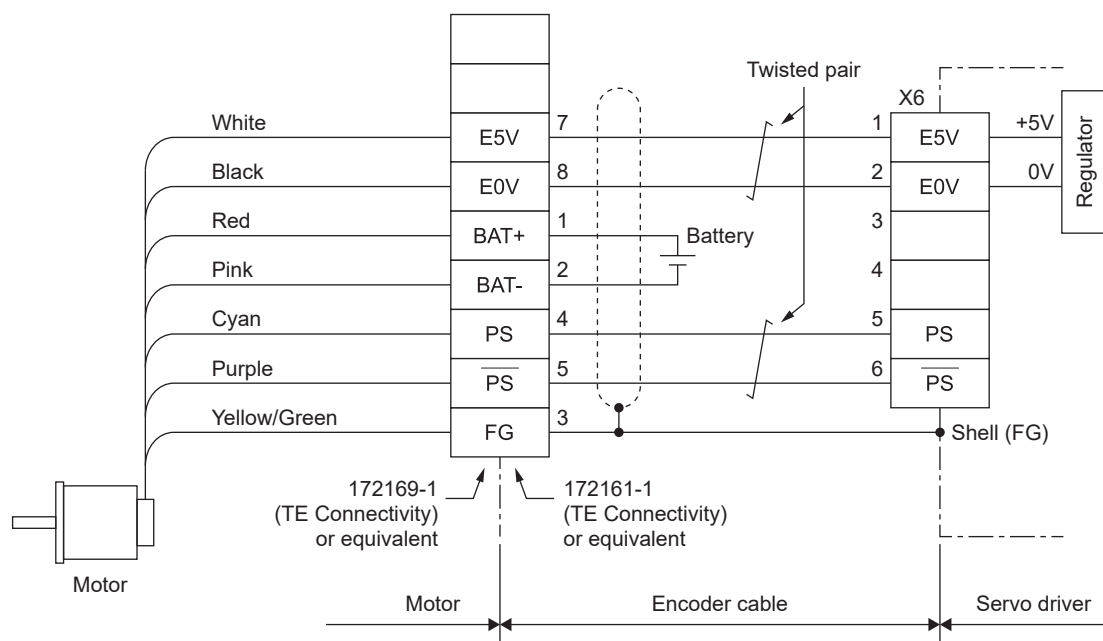


**Connector type**

MSMF 50 W - 1000 W

MHMF 50 W - 1000 W

MQMF 100 W - 400 W

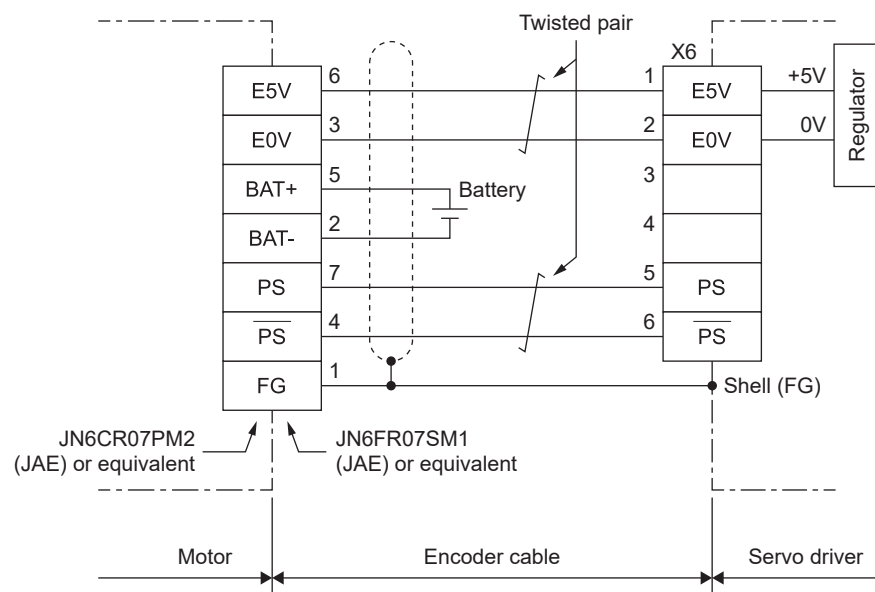


MSMF 1.0 kW - 5.0 kW

MHMF 1.0 kW - 5.0 kW

MDMF 1.0 kW - 5.0 kW

MGMF 0.85 kW - 4.4 kW

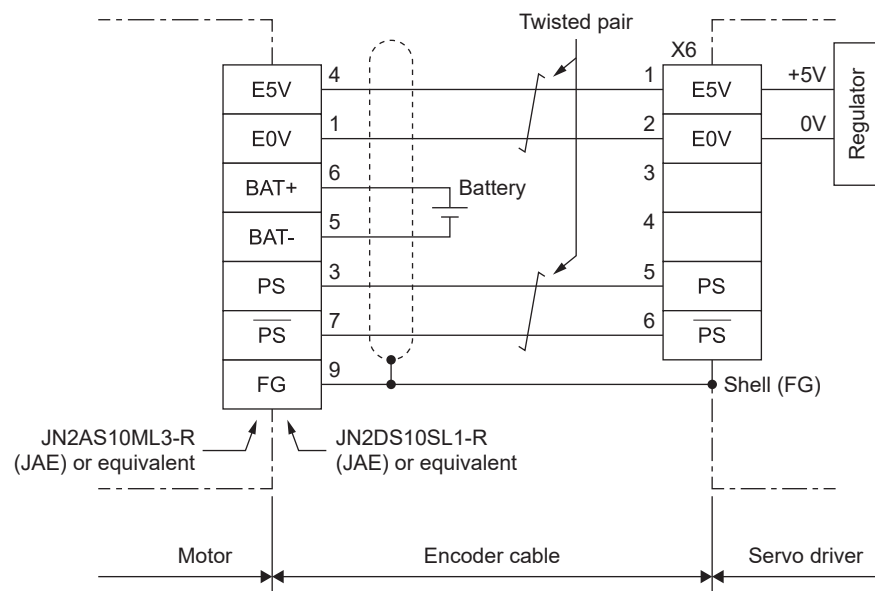


**Cannon plug type**

MSMF 1.0 kW - 5.0 kW

MHMF 1.0 kW - 7.5 kW

MDMF 1.0 kW - 22.0 kW

MGMF 0.85 kW - 5.5 kW

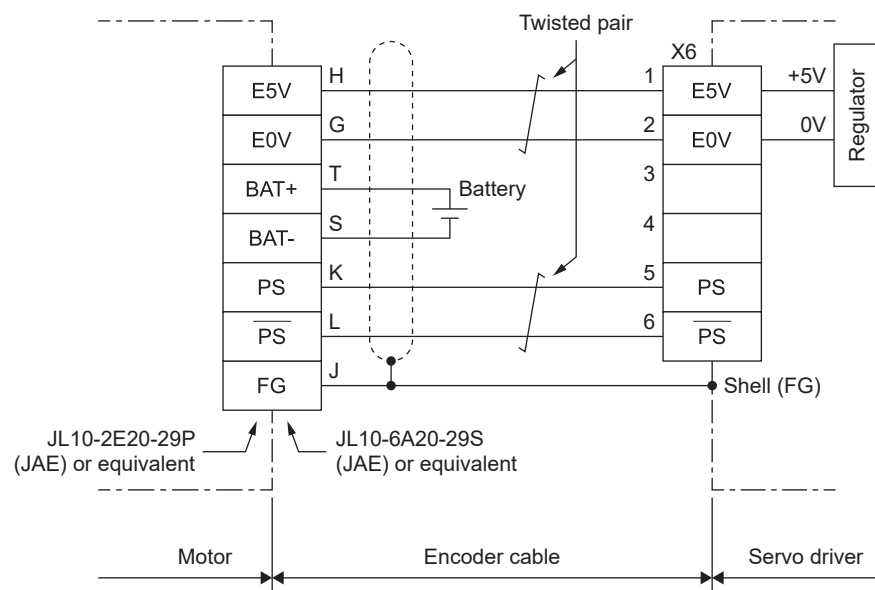
**Right-angle cannon plug type**

MSMF 1.0 kW - 5.0 kW (400 V)

MHMF 1.0 kW - 5.0 kW (400 V)

MDMF 1.0 kW - 5.0 kW (400 V)

MGMF 0.85 kW - 4.4 kW (400 V)

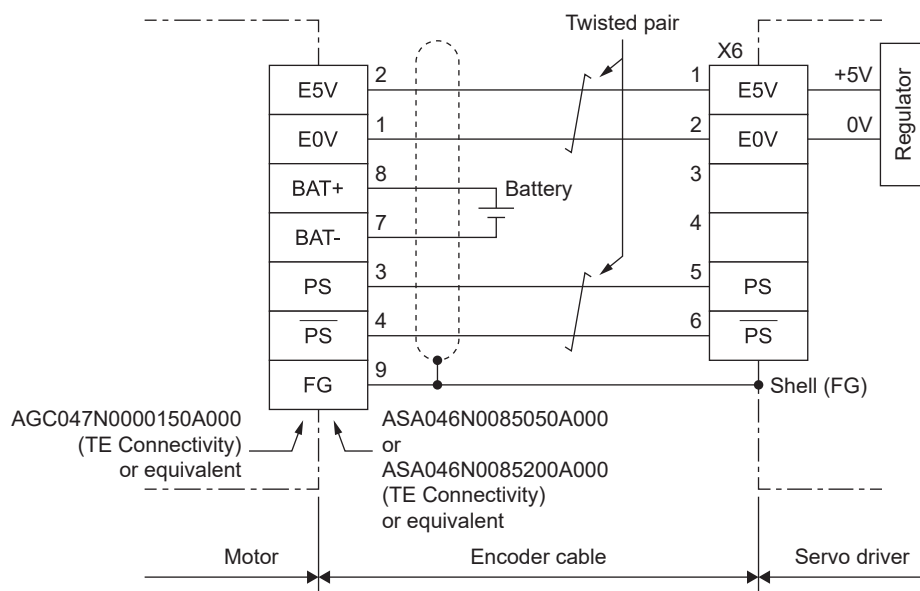

### 8.3.4.3 Precautions for absolute encoder battery usage

- If the battery voltage drops, an error occurs in the absolute encoder.

Voltage drops can be caused by battery life span or voltage delays.


- 1 Be aware that battery life span may be reduced due to surrounding environmental conditions.
- 2 Lithium batteries have a transient minimum voltage (voltage delay) that may temporarily drop when the battery begins to discharge current. For this reason, the battery must be refreshed before being used.

#### When using the battery for the first time

- If using the optional DV0P2990 battery unit (built-in battery: Toshiba Lifestyle ER6V 3.6 V), connect the connector with lead wire to the CN601 as shown in the figure to the right and let it sit for 5 minutes.

After that, disconnect the connector from CN601 and attach it to the servo driver.

Even customer-supplied batteries should be refreshed before using. Consult the battery manufacturer on how to perform refreshing.



#### After installing the battery unit

- We recommend turning the control power supply on and off approximately once a day.
- Using batteries incorrectly may result in product damage due to battery leakage and in damage to the battery. Make sure to observe the following:
    - 1 The positive and negative poles must be oriented correctly.
    - 2 Because leaving batteries that have been used for long periods of time or that are no longer usable inside the device may cause problems such as leaks, replace them immediately. (Replacement is recommended roughly every two years.)
      - The electrolytic solution in the battery is highly corrosive and can corrode peripheral parts. It is also conductive and can cause issues such as short circuits. Make sure to replace the battery periodically.
    - 3 Do not attempt to disassemble the battery or subject it to fire.
      - Do not attempt to disassemble the battery due to the extreme risks presented were its contents to spray out and get into eyes. It may explode if subjected to fire or heated.
    - 4 Do not attempt to short circuit the battery or remove its tube.
      - If metal or other such materials were come in contact with the positive or negative pole terminals of the battery, a large current would flow all at once, which would not only weaken the battery, but also generate severe heat and possibly cause the battery to rupture.
    - 5 This battery cannot be charged. Do not attempt to charge it.
  - Because the disposal of used batteries is regulated by municipalities, please dispose of the battery in accordance with the regulations of your municipality.
  - Air transportation
 

When transporting by aircraft (either passenger or cargo) the submission of a hazardous materials application is required. (UN packaging is required.)

When requesting air transportation, air transport carriers will require the submission of the necessary documents (parameter sheets, SDS, etc.). These can be obtained from your distributor.
  - UN packaging
 

Please contact your air transport carrier.

## 8.4 Dynamic Brake

The servo driver (sizes A–G) feature a built-in dynamic brake for emergency stopping.

The size H servo driver does not have a built-in dynamic brake.

The dynamic brake can be activated when the:

- 1 main power supply is off;
- 2 servo is off;
- 3 protection function is activated;
- 4 over-travel inhibit inputs (POT, NOT) of connector X4 are operated.

Under conditions (1) to (4) above, dynamic brake operation or free running can be selected using parameters during deceleration or after stopping.

However, when the control power supply input is off, the dynamic brake continues operating for servo driver sizes A–F, while the dynamic brake stops operating for servo driver sizes G and H.

Because the dynamic brake is rated for short time periods and is only to be used for emergency stopping, please adhere to the following:

- 1 Do not start or stop the device by turning the servo-on signal (SRV-ON) on or off.  
This may damage the dynamic braking circuit incorporated into the servo drive.
- 2 Do not run the motor using an external power source.  
If the motor is run externally, it will start acting as an electricity generator. This may cause it to short-circuit during operation of the dynamic brake, resulting in smoke or fire.  
Doing so may also cause the dynamic brake to become disconnected, preventing it from functioning.
- 3 If the dynamic brake is applied when the device is operating at a high speed, allow a stop time of approximately 10 minutes.  
Failure to do so may cause the dynamic brake to disconnect or the brake to no longer be operable.

A dynamic brake circuit (electromagnetic contactor for driving and resistor) can be externally attached to size G and H servo drivers.

In the case of the size G servo driver, external attachment is recommended when the capacity of the built-in dynamic brake is insufficient.

Wiring according to “8.3.1 Wiring to Power Connectors and Terminal Blocks” shown above and the wiring diagrams for “8.3.1.5 Size G 200 V” and “8.3.1.6 Size H 200 V”.

## 8.5 Mounting Direction and Spacing


- The servo driver is a vertically mounted type. Ensure that it is mounted vertically.
- Servo driver sizes A–D and H come standard as base-mounted types (rear-mounted).
- If changing the mounting surface of servo driver sizes A–D, use a separately sold mounting bracket.
- Select a tightening torque for the mounting screws used to secure your product by considering screw strength and the material to which it will be mounted.

Example: Mounting to steel with steel screws

Sizes A–G: M5 2.7–3.3 N·m; H: M6 4.7–5.7 N·m

- To ensure effective cooling, ensure surrounding space for airflow.
- Install a fan to achieve a uniform temperature within the control panel.
- Sizes D–F frames are equipped with a cooling fan on the bottom, while sizes G and H are equipped with cooling fans on the bottom and top.
- Observe the environmental conditions for the control panel as described in chapter [“9.3.1 Installation Environment”](#).
- The servo driver must be secured to a grounded conductive frame.
- If the area where the servo driver is to be mounted is painted, removing the paint before installation will help to prevent noise.
- If using custom brackets, the bracket surface must have a conductive plating.
- Measure the ambient temperature of the servo driver at a location that is 50 mm from the side or bottom of the servo driver.

If measuring from a distance of 50 mm is not possible, instead measure at the midpoint of the gap between the obstacle preventing measurement and the servo driver.

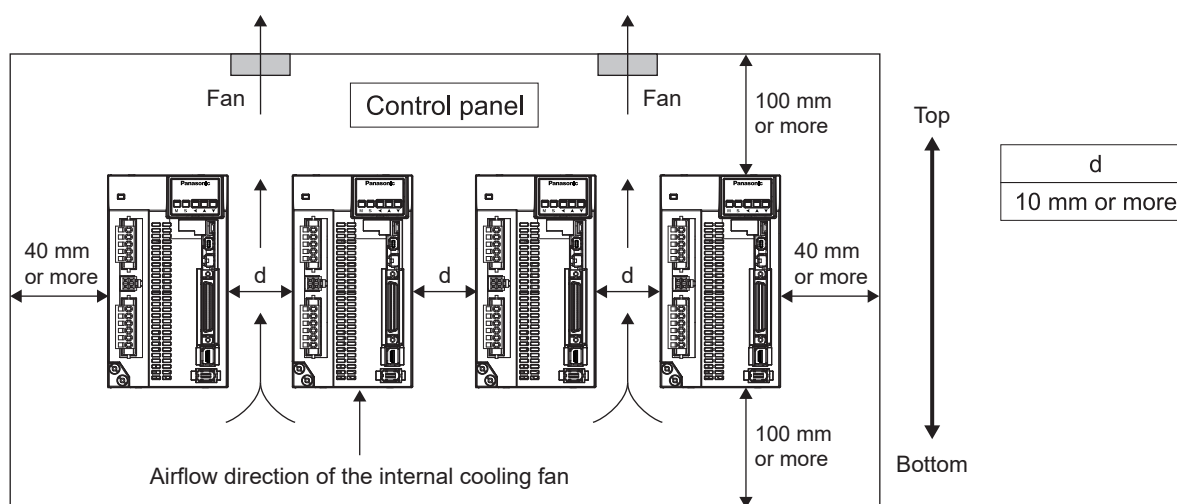

## 9 Compliance with International Standards

### 9.1 List of Compliance Standards for Servo Drivers

|                 |                                  | Standard No.                                                                                                                       |
|-----------------|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| EU/UK Standards | EMC                              | EN55011:2016/A11:2020 (Group 1, Class A)<br>EN61000-6-2<br>EN61000-6-4<br>EN61800-3:2004/A1:2012 (Category C3, Second environment) |
|                 | Low voltage                      | EN61800-5-1                                                                                                                        |
|                 | Machinery<br>(Functional Safety) | ISO13849-1<br>EN61508<br>EN62061<br>EN61800-5-2<br>IEC61326-3-1<br>IEC60204-1                                                      |
| UL standards    |                                  | UL61800-5-1 (File No. E164620)                                                                                                     |
| CSA standards   |                                  | C22.2 No.274                                                                                                                       |
| KC              |                                  | KN11<br>KN61000-4-2, 3, 4, 5, 6, 8, 11                                                                                             |

IEC: International Electrotechnical Commission

EN: Europaischen Norman

EMC: Electromagnetic Compatibility

UL: Under writers Laboratories

CSA: Canadian Standards Association

KC: Radio Waves Act (South Korea)

#### Safety parameters

|                                                   | With EDM diagnostic                                                                                                                               | Without EDM diagnostic                                                                                                                            |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety integrity level                            | EN61508 (SIL3)<br>EN62061 (SILCL3)                                                                                                                | EN61508 (SIL2)<br>EN62061 (SILCL2)                                                                                                                |
| Performance level                                 | ISO13849-1 PL e (Cat.3)                                                                                                                           | ISO13849-1 PL d (Cat.3)                                                                                                                           |
| Safety function                                   | EN61800-5-2 (SIL 3, STO)                                                                                                                          | EN61800-5-2 (SIL 2, STO)                                                                                                                          |
| Probability of dangerous failure per unit of time | <For size A, B, C, D, E, F><br>PFH = $1.34 \times 10^{-8}$<br>(%SIL3=13.4%)<br><For size G and H><br>PFH = $1.78 \times 10^{-8}$<br>(%SIL3=17.8%) | <For size A, B, C, D, E, F><br>PFH = $1.40 \times 10^{-8}$<br>(%SIL2=1.40%)<br><For size G and H><br>PFH = $1.85 \times 10^{-8}$<br>(%SIL2=1.85%) |
| Mean time to dangerous failure                    | MTTFd: High (100 years)                                                                                                                           | MTTFd: High (100 years)                                                                                                                           |
| Average self-diagnostic coverage                  | DC: Medium                                                                                                                                        | DC: Low                                                                                                                                           |
| Mission time                                      | 15 years                                                                                                                                          | 15 years                                                                                                                                          |

## 9.2 EU directives and UK regulations

Our products comply with standards associated with the EU low voltage directive/UK low voltage regulation in order to facilitate compliance of embedded equipment and devices with the EU directives/UK regulations.

### 9.2.1 Compliance with the EU EMC directive/UK EMC regulation

#### EN 55011

Warning: Class A equipment is intended for use in an industrial environment. Conductive and radioactive interference can make it difficult to ensure electromagnetic compatibility in other environments.

Caution: This equipment is not intended for use in residential environments and may not provide adequate protection to radio reception in such environments.

#### EN 61800-3

Servo drivers and servo motors are not intended for general household use or for connection to low-voltage public communication lines. Radio frequency interference may occur when connected to such circuits.

To comply with the EU EMC directive/UK EMC regulation, use a noise filter, a surge absorber, and a ferrite core.

The compliance of machinery and equipment with the EU EMC directive/UK EMC regulation must be confirmed on machinery and equipment in its final state incorporating servo drivers and servo motors.

### 9.2.2 Compliance with EN 61800-5-1:2007/A11:2021

#### 1 Earth fault protection

This product does not have an earth fault protection function. Install a circuit breaker for wiring or an earth leakage breaker according to the grounding system.

Earth fault protection conditions for earth fault circuit breakers are shown below. The requirements of EN 60364-4-41 are met under these conditions.

Obey the laws and regulations of the country or region where you use the TT system. The rated sensitivity current and loop impedance of the earth leakage breaker are specified in some cases. You may also need a type B earth fault circuit breaker.

For TN system

| Model     | MCCB              |           |               | Voltage to earth [V] | Acceptable maximum fault loop impedance [ $\Omega$ ] |
|-----------|-------------------|-----------|---------------|----------------------|------------------------------------------------------|
|           | Rated current [A] | Type name | Manufacturer  |                      |                                                      |
| MADL*01** | 10                | BW50RAGU  | Fuji Electric | 100                  | 0.43                                                 |
| MADL*11** | 10                | BW50RAGU  | Fuji Electric | 100                  | 0.44                                                 |
| MBDL*21** | 10                | BW50RAGU  | Fuji Electric | 100                  | 0.45                                                 |
| MCDL*31** | 15                | BW50RAGU  | Fuji Electric | 100                  | 0.34                                                 |
| MADL*05** | 10                | BW50RAGU  | Fuji Electric | 115                  | 0.53                                                 |
| MADL*15** | 10                | BW50RAGU  | Fuji Electric | 115                  | 0.54                                                 |
| MBDL*25** | 10                | BW50RAGU  | Fuji Electric | 115                  | 0.55                                                 |
| MCDL*35** | 15                | BW50RAGU  | Fuji Electric | 115                  | 0.42                                                 |
| MDDL*45** | 20                | BW50RAGU  | Fuji Electric | 115                  | 0.28                                                 |
| MDDL*55** | 20                | BW50RAGU  | Fuji Electric | 115                  | 0.28                                                 |
| MEDL*83** | 30                | BW50RAGU  | Fuji Electric | 115                  | 0.16                                                 |
| MEDL*93** | 30                | BW50RAGU  | Fuji Electric | 115                  | 0.16                                                 |
| MFDL*A3** | 50                | BW50RAGU  | Fuji Electric | 115                  | 0.17                                                 |
| MFDL*B3** | 50                | BW50RAGU  | Fuji Electric | 115                  | 0.17                                                 |

| Model     | MCCB                 |           |               | Voltage to earth<br>[V] | Acceptable maximum fault loop impedance<br>[Ω] |
|-----------|----------------------|-----------|---------------|-------------------------|------------------------------------------------|
|           | Rated current<br>[A] | Type name | Manufacturer  |                         |                                                |
| MGDL*C3** | 60                   | BW100EAGU | Fuji Electric | 115                     | 0.12                                           |
| MHDL*E3** | 125                  | BW125JAGU | Fuji Electric | 115                     | 0.06                                           |
| MHDL*F3** | 175                  | BW50RAGU  | Fuji Electric | 115                     | 0.03                                           |
| MDDL*44** | 10                   | BW50RAGU  | Fuji Electric | 219                     | 1.08                                           |
| MDDL*54** | 10                   | BW50RAGU  | Fuji Electric | 219                     | 1.09                                           |
| MDDL*64** | 10                   | BW50RAGU  | Fuji Electric | 219                     | 1.10                                           |
| MEDL*84** | 15                   | BW50RAGU  | Fuji Electric | 219                     | 0.90                                           |
| MFDL*A4** | 30                   | BW50RAGU  | Fuji Electric | 219                     | 0.44                                           |
| MFDL*B4** | 30                   | BW50RAGU  | Fuji Electric | 219                     | 0.44                                           |

For TT system

| Model     | ELCB                 |                                   |           |               | Voltage to earth<br>[V] | Acceptable maximum fault loop impedance<br>[Ω] |
|-----------|----------------------|-----------------------------------|-----------|---------------|-------------------------|------------------------------------------------|
|           | Rated current<br>[A] | rated sensitivity current<br>[mA] | Type name | Manufacturer  |                         |                                                |
| MADL*01** | 10                   | 30                                | EW50RAGU  | Fuji Electric | 100                     | 360                                            |
| MADL*11** | 10                   | 30                                | EW50RAGU  | Fuji Electric | 100                     | 360                                            |
| MBDL*21** | 10                   | 30                                | EW50RAGU  | Fuji Electric | 100                     | 360                                            |
| MCDL*31** | 15                   | 30                                | EW50RAGU  | Fuji Electric | 100                     | 360                                            |
| MADL*05** | 10                   | 100                               | EW50RAGU  | Fuji Electric | 115                     | 207                                            |
| MADL*15** | 10                   | 100                               | EW50RAGU  | Fuji Electric | 115                     | 207                                            |
| MBDL*25** | 10                   | 100                               | EW50RAGU  | Fuji Electric | 115                     | 207                                            |
| MCDL*35** | 15                   | 100                               | EW50RAGU  | Fuji Electric | 115                     | 207                                            |
| MDDL*45** | 20                   | 100                               | EW50RAGU  | Fuji Electric | 115                     | 207                                            |
| MDDL*55** | 20                   | 100                               | EW50RAGU  | Fuji Electric | 115                     | 207                                            |
| MEDL*83** | 30                   | 100                               | EW50RAGU  | Fuji Electric | 115                     | 207                                            |
| MEDL*93** | 30                   | 100                               | EW50RAGU  | Fuji Electric | 115                     | 207                                            |
| MFDL*A3** | 50                   | 100                               | EW50RAGU  | Fuji Electric | 115                     | 207                                            |
| MFDL*B3** | 50                   | 100                               | EW50RAGU  | Fuji Electric | 115                     | 207                                            |
| MGDL*C3** | 60                   | 100                               | EW100EAGU | Fuji Electric | 115                     | 207                                            |
| MHDL*E3** | 125                  | 100                               | EW125JAGU | Fuji Electric | 115                     | 172                                            |
| MHDL*F3** | 175                  | 100                               | EW250JAGU | Fuji Electric | 115                     | 166                                            |

## 2 Over heat protection/Over load protection

The servo amplifier has a built-in servo motor overload protection function, but the servo motor does not have an overheat protection function. If it becomes necessary to meet NEC standards, take measures to protect the servo motor from overheating. (Refer to “9.5 Compliance with UL Standards” “4” Load protection and overheating protection)

## 9.3 Configuration of Peripheral Devices

### 9.3.1 Installation Environment


Use in an environment with a pollution degree 2 as stipulated in IEC60664-1.

(Example: Install in an IP54 metal control panel.)


Make sure to connect a molded case circuit breaker (MCCB) or fuse that is compliant with IEC standards or that is UL-approved to the main power supply.

The power supply for parallel I/O should be a DC 24 V power supply with double or reinforced insulation.

#### 100 V/200 V type specification

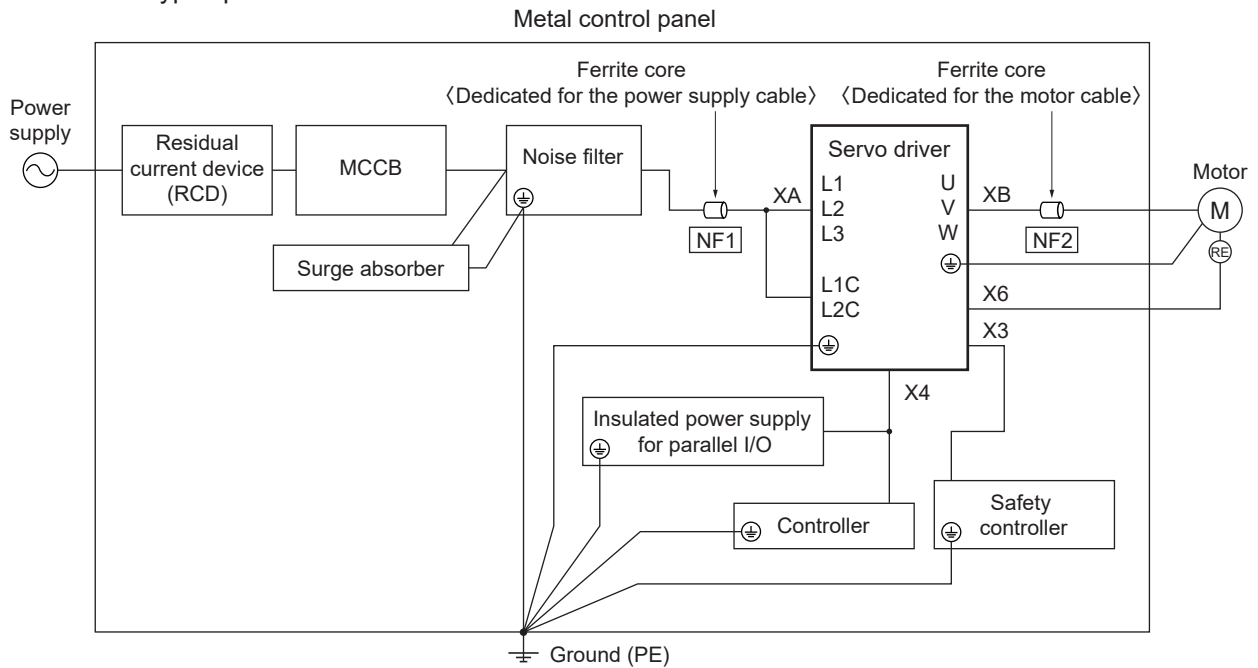

#### 400 V type specification

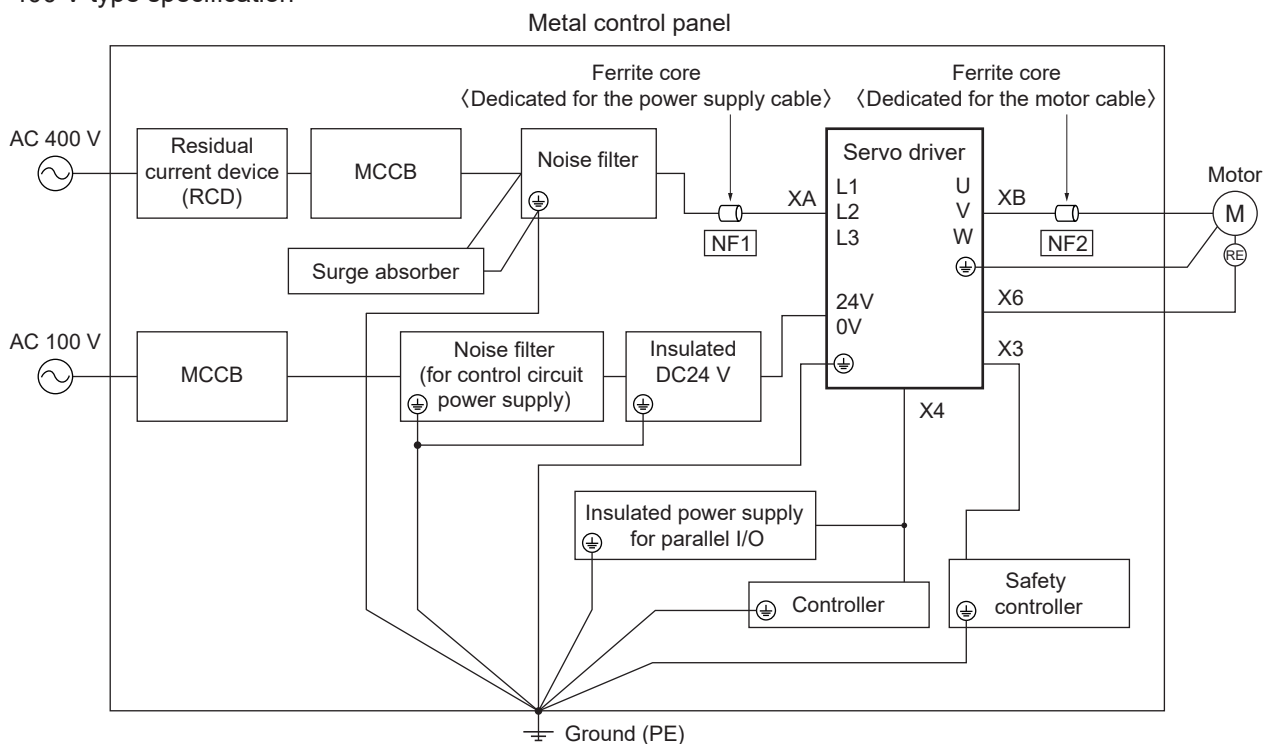

## Ferrite core installation status during EMC certification test

| Symbol | Location           | Applicable size                                             | Option product number | Manufacturer product number | Manufacturer             | Quantity |
|--------|--------------------|-------------------------------------------------------------|-----------------------|-----------------------------|--------------------------|----------|
| NF1    | Power supply cable | (100 V) C<br>(200 V) C, D, F                                | —                     | —                           | —                        | None     |
|        |                    | (100 V) A, B<br>(200 V) A, B, E<br>(400 V) D, E, F          | DV0P1460              | ZCAT3035-1330               | TDK Corporation          | 1 (*1)   |
|        |                    | (200 V) G, H                                                | DV0P1460              | ZCAT3035-1330               | TDK Corporation          | 3 (*2)   |
|        |                    |                                                             | Recommended parts     | RJ8095                      | Konno Kogyosho Co., Ltd. | 1 (*3)   |
| NF2    | Motor cable        | (100 V) A, B, C<br>(200 V) A, B, C, D, E<br>(400 V) D, E, F | DV0P1460              | ZCAT3035-1330               | TDK Corporation          | 1 (*1)   |
|        |                    | (200 V) F                                                   | DV0P1460              | ZCAT3035-1330               | TDK Corporation          | 2 (*4)   |
|        |                    | (200V) G, H                                                 | DV0P1460              | ZCAT3035-1330               | TDK Corporation          | 3 (*2)   |
|        |                    |                                                             | Recommended parts     | T400-61D                    | MICROMETALS              | 1 (*3)   |

- \*1 Power supply cables (L1, L2, L3) should be wound together for one circle. Motor cables (U, V, W) should also be wound together for one circle. One circle (bypass one line).
- \*2 Power supply cables (L1, L2, L3) should be wound individually for one circle. Motor cables (U, V, W) should also be wound individually for one circle. One circle (bypass one line).
- \*3 Power supply cables (L1, L2, L3) should be wound together for four circles. Motor cables (U, V, W) should also be wound together for four circles. If four turns is difficult, use two identical ferrite cores and make two turns for each.
- \*4 Combine motor wires (U, V, W) and attach two ferrite cores in series. One circle (bypass one line).

### 9.3.2 Power Supply

|                                           |                                                                           |                |          |
|-------------------------------------------|---------------------------------------------------------------------------|----------------|----------|
| 100 V (Sizes A–C)                         | : Single-phase 100–120 V                                                  | +10 %<br>-15 % | 50/60 Hz |
| 200 V (Sizes A–D)                         | : Single-phase/3-phase 200 V–240 V                                        | +10 %<br>-15 % | 50/60 Hz |
| 200 V (Sizes E–H)                         | : 3-phase 200–240 V                                                       | +10 %<br>-15 % | 50/60 Hz |
| 400 V (Sizes D–F) Main power supply       | : 3-phase 380 Y/220–480 Y/277 V<br>TN (ground the neutral point to earth) | +10 %<br>-15 % | 50/60 Hz |
| 400 V (Sizes D–F) Controlled power supply | : DC 24 V                                                                 | ±15 %          |          |

- 1 Use in an OVC III environment as stipulated in IEC60664-1.
- 2 Use an insulated DC 12 to 24 V parallel I/O power supply that is in compliance with the CE marking or the EN standard (EN60950).

### 9.3.3 Molded Case Circuit Breaker (MCCB)

Make sure to connect a molded case circuit breaker (MCCB) that is compliant with IEC standards or that is UL-approved (listed, with ) between the power supply and noise filter.

The product's short-circuit protection circuit is not intended to protect the branch circuit.

Select branch circuit protection in accordance with the NEC standard and local standards.

### 9.3.4 Noise Filter

If using multiple servo drivers and installing one noise filter for all to the power supply, consult with the manufacturer of the noise filter.

### 9.3.5 Surge Absorber

Install the surge absorber to the primary side of the noise filter.

#### Caution

- Always remove the surge absorber before pressure testing machinery and equipment.  
Failure to do so may result in damage to the surge absorber.

### 9.3.6 Ferrite Core

Install ferrite cores on the power supply input line and motor output line.

### 9.3.7 Grounding

- 1 To prevent electric shock, make sure to connect the protective ground terminal () of the servo driver with the protective ground (PE) of the control panel.
- 2 Do not tighten the connection to the protective ground terminal (). There are two protective ground terminals.

## 9.4 List of Peripheral Devices Applicable to the Servo Driver

| Servo driver | Voltage specification             | Power supply capacity<br>(At rated load) | Electromagnetic contactor<br>(Rated energizing current/<br>Open heat current) | MCCB<br>Rated current | Noise filter                                      | Surge absorber                                                   | Ferrite core       |                      |  |  |  |
|--------------|-----------------------------------|------------------------------------------|-------------------------------------------------------------------------------|-----------------------|---------------------------------------------------|------------------------------------------------------------------|--------------------|----------------------|--|--|--|
|              |                                   |                                          |                                                                               |                       |                                                   |                                                                  | Power supply cable | Motor cable          |  |  |  |
| MADL□01□□    | Single-phase<br>100 V             | Approx.<br>0.4 kVA                       | 20 A                                                                          | 10 A                  | DV0P4170<br>(for single-phase)<br>/<br>DV0PM20042 | DV0P4190<br>(for single-phase)<br>/<br>DV0P1450<br>(for 3-phase) | DV0P1460           | DV0P1460             |  |  |  |
| MADL□11□□    |                                   |                                          |                                                                               |                       |                                                   |                                                                  |                    |                      |  |  |  |
| MADL□05□□    | Single-phase/<br>3-phase<br>200 V | Approx.<br>0.5 kVA                       |                                                                               |                       |                                                   |                                                                  |                    |                      |  |  |  |
| MADL□15□□    |                                   |                                          |                                                                               |                       |                                                   |                                                                  |                    |                      |  |  |  |
| MBDL□21□□    | Single-phase<br>100 V             | Approx.<br>0.5 kVA                       |                                                                               |                       |                                                   |                                                                  |                    |                      |  |  |  |
| MBDL□25□□    | Single-phase/<br>3-phase<br>200 V | Approx.<br>0.9 kVA                       |                                                                               |                       |                                                   |                                                                  |                    |                      |  |  |  |
| MCDL□31□□    | Single-phase<br>100 V             | Approx.<br>0.9 kVA                       |                                                                               | 15 A                  | DV0PM20042                                        |                                                                  |                    |                      |  |  |  |
| MCDL□35□□    | Single-phase/<br>3-phase<br>200 V | Approx.<br>1.8 kVA                       |                                                                               |                       |                                                   |                                                                  |                    |                      |  |  |  |
| MDDL□45□□    | Single-phase/<br>3-phase<br>200 V | Approx.<br>2.4 kVA                       | 30 A                                                                          | 20 A                  | DV0P4220                                          |                                                                  |                    |                      |  |  |  |
| MDDL□55□□    |                                   | Approx.<br>2.9 kVA                       |                                                                               |                       |                                                   |                                                                  |                    |                      |  |  |  |
| MEDL□83□□    | 3-phase<br>200 V                  | Approx.<br>3.8 kVA                       | 60 A                                                                          | 30 A                  | DV0PM20043                                        | DV0P1450                                                         |                    |                      |  |  |  |
| MEDL□93□□    |                                   | Approx.<br>4.5 kVA                       |                                                                               |                       |                                                   |                                                                  |                    |                      |  |  |  |
| MFDL□A3□□    |                                   | Approx.<br>5.2 kVA                       | 100 A                                                                         | 50 A                  | DV0P3410                                          |                                                                  |                    |                      |  |  |  |
| MFDL□B3□□    |                                   | Approx.<br>7.8 kVA                       |                                                                               |                       |                                                   |                                                                  |                    |                      |  |  |  |
| MGDL□C3□□    |                                   |                                          | Approx.<br>11 kVA                                                             | 100 A                 | 60 A                                              | HF3080C-SZA                                                      |                    |                      |  |  |  |
| MHDL□E3□□    |                                   |                                          | Approx.<br>20 kVA                                                             | 150 A                 | 125 A                                             | HF3100C-SZA                                                      | DV0P1460<br>RJ8095 | DV0P1460<br>T400-61D |  |  |  |
| MHDL□F3□□    |                                   |                                          | Approx.<br>28 kVA                                                             |                       | 175 A                                             |                                                                  |                    |                      |  |  |  |
| MDDL□44□□    | 3-phase<br>400 V                  | Approx.<br>1.8 kVA                       | 20 A                                                                          | 10 A                  | FN3258-16-44                                      | LT-C34G801WS                                                     | DV0P1460           | DV0P1460             |  |  |  |
| MDDL□54□□    |                                   | Approx.<br>2.4 kVA                       |                                                                               |                       |                                                   |                                                                  |                    |                      |  |  |  |
| MDDL□64□□    |                                   | Approx.<br>2.9 kVA                       |                                                                               |                       |                                                   |                                                                  |                    |                      |  |  |  |
| MEDL□84□□    |                                   | Approx.<br>3.8 kVA                       | 30 A                                                                          | 15 A                  |                                                   |                                                                  |                    |                      |  |  |  |
| MFDL□A4□□    |                                   | Approx.<br>5.2 kVA                       | 60 A                                                                          | 30 A                  | FN3258-30-33                                      |                                                                  |                    |                      |  |  |  |
| MFDL□B4□□    |                                   | Approx.<br>7.8 kVA                       |                                                                               |                       |                                                   |                                                                  |                    |                      |  |  |  |

\* For both single-phase/3-phase 200 V specifications, select the peripherals according to the power supply used.

## Notes

- Select a molded case circuit breaker (MCCB) and noise filter with a capacity that matches the power supply capacity (considering load conditions).
- Use copper conductor wires with a temperature rating of 75°C or higher when wiring terminal blocks and ground terminals.

The protective ground terminal is M4 for sizes A–E, M5 for sizes F and G, and M6 for size H.

If the tightening torque of the screws exceeds the maximum value (see the terminal block description page), the terminal block may be damaged.

- The wire diameter of the ground cable must be 2.0 mm<sup>2</sup> (AWG 14) or more for outputs between 50 W–2.5 kW, 3.5 mm<sup>2</sup> (AWG 12) or more for outputs between 3.0 kW–5.0 kW, 8.0 mm<sup>2</sup> (AWG 8) or more for an output of 7.5 kW, 22 mm<sup>2</sup> (AWG 4) or more for an output of 15.0 kW, and 38 mm<sup>2</sup> (AWG 2) or more for an output of 22.0 kW.
- For sizes A–E, use the included dedicated connectors.
- The tightening torque of the screw used for connecting connector (X4) to the host controller should be between 0.2 ± 0.05 N·m.

If the tightening torque of the screws exceeds the maximum value, the connector on the servo driver side may be damaged.

|                | Option product number | Manufacturer product number | Manufacturer              |
|----------------|-----------------------|-----------------------------|---------------------------|
| Surge absorber | DV0P1450              | R·A·V-781BXZ-4              | Okaya Electric Industries |
|                | DV0P4190              | R·A·V-781BWZ-4              |                           |
|                | —                     | LT-C34G801WS                | Soshin Electric           |
| Ferrite core   | DV0P1460              | ZCAT3035-1330               | TDK Corporation           |
|                | —                     | RJ8095                      | Konno Kogyosho Co., Ltd.  |
|                | —                     | T400-61D                    | MICROMETALS               |
| Noise filter   | DV0P4170              | SUP-EK5-ER-6                | Okaya Electric Industries |
|                | DV0P4220              | 3SUP-HU30-ER-6              |                           |
|                | DV0P3410              | 3SUP-HL50-ER-6B             |                           |
|                | DV0PM20042            | 3SUP-HU10-ER-6              |                           |
|                | DV0PM20043            | 3SUP-HU50-ER-6              |                           |
|                | —                     | HF3080C-SZA                 | Soshin Electric           |
|                | —                     | HF3100C-SZA                 |                           |
|                | —                     | HF3040C-SZC                 |                           |
|                | —                     | FN3258-16-44                | Schaffner EMC             |
|                | —                     | FN3258-30-33                |                           |

## 9.5 Compliance with UL Standards

### 1 Installation environment

Install in an environment with a pollution degree 2 as stipulated in IEC60664-1.

Make sure to connect a molded case circuit breaker (MCCB) or fuse that is UL-approved to the main power supply.

Use copper conductor wires with a temperature rating of 75°C or higher when wiring.

### 2 Short circuit current rating (SCCR)

This servo driver is compatible with power supplies whose voltage is less than the maximum input voltage and which have a symmetrical current of 5000 Arms or less.

### 3 Branch circuit protection

Protect the branch circuit in accordance with the NEC (National Electrical Code) and local standards.

### 4 Load protection and overheating protection

The servo driver has a built-in servo motor overload protection function.

The overload protection function operates based on specified time limit characteristics when current has reached 115% or more of the rating.

For overload protection time characteristics, please refer to "Technical Reference Document - Basic Function Specifications - 7. Protective function/Alarm function".

The servo motor does not have an overheating protection function. If NEC compliance is required, implement overheating protection measures for the servo motor.

The servo driver has the thermal memory (shut down) function specified in EN61800-5-1 / UL61800-5-1, but does not have thermal memory (loss of power) or speed sensitivity functions.

## 9.6 Radio Waves Act (South Korea)

Under South Korea's Radio Waves Act, this servo driver is classified as a Class A commercial electromagnetic radio wave generator that is not designed for household use.

The user and distributor should be aware of this fact.

**A 급 기기 (업무용 방송통신기자재)**

이 기기는 업무용(A 급) 전자파적합기기로서 판매자 또는 사용자는 이 점을 주의하시기 바라며, 가정외의 지역에서 사용하는 것을 목적으로 합니다.

( 대상기종 : **Servo Driver** )

[Reference translation]

Class A device (broadcast communication device for business use)

This product is an electromagnetic wave generating device for business use (Class A), which is intended non-household use.

The user and distributor should be aware of this fact.

(Applicable model: Servo Driver)

## 9.7 Compliance with the SEMI F47 Standard

- The SEMI F47 standard includes requirements for voltage drops in semiconductor manufacturing equipment.
- The control power supply for the servo driver complies with the SEMI F47 standard.

The main circuit power supply complies with the SEMI F47 standard at no-load and light loads.

### Precautions

- This does not apply to single-phase 100 V servo drivers whose control power supply input is DC 24 V.
- Make sure to perform evaluations and confirmation for compatibility with the SEMI F47 standard using the actual equipment.

## 9.8 Harmonic Suppression Measures

- Harmonic suppression measures vary by country. Install in accordance with local regulations.
- Servo drivers for Japan whose input current exceeds 20 A are applicable to the “Guidelines for harmonic suppression measures for users who receive high-voltage or extra-high voltage power”. Calculate the equivalent capacity and harmonic outflow current based on the guidelines. If the harmonic current is found to exceed the limit value predetermined for the contract demand, appropriate measures must be taken. Furthermore, when calculating the equivalent capacity, assume that the conversion factor of the servo driver is  $K_{31}=3.4$ . (Refer to JEM-TR210 and JEM-TR225\*.)

\* These are technical documents issued by JEMA (Japan Electrical Manufacturers' Association).

## 10 SAFETY PRECAUTIONS

This section explains precautions that must be taken to prevent harm to people and damage to property.



# SAFETY PRECAUTIONS

The following symbols represent the extent of the harm or damage that may occur through improper use.

|                                                                                                  |                                                                 |
|--------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|
|  <b>DANGER</b>  | This indicates "a significant risk of death or serious injury". |
|  <b>CAUTION</b> | This indicates "a risk of minor injury or damage to property".  |

The following symbols indicate how to comply with safety precautions.

|                                                                                   |                                 |
|-----------------------------------------------------------------------------------|---------------------------------|
|  | Something that you must not do. |
|  | Something you must do.          |



## DANGER



- 1 Ensure that the product is used in an environment of pollution degree 2 (places free from dust, metal powders, oil mists, and other foreign objects, as well as liquids such as water, oil, or grinding fluids). Do not store or use near combustible materials or in an environment containing corrosive gases (H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, Cl<sub>2</sub>, etc.), flammable gases, helium gases, or other gases with low molecular weight.
- 2 Do not place flammable materials near the motor, servo driver, or regenerative resistor.
- 3 Do not run the motor using an external power source. If the motor is run externally, it will start acting as an electricity generator. This may cause it to short-circuit during operation of the dynamic brake, which is integrated into the servo driver, resulting in smoke and dust being emitted. Doing so may also cause the dynamic brake to become disconnected, preventing it from functioning.
- 4 Do not damage the cable, apply undue stress to it, place heavy objects on it, or pinch it.
- 5 Do not use with the cable submerged in oil or water.
- 6 Do not install the product next to heating elements such as heaters or large winding resistors. (Protection such as heat shields should be used to protect the product from heating elements.)
- 7 Do not connect a commercial power supply directly to the motor.
- 8 Do not use in places susceptible to strong vibrations or impacts. If installing a servo driver near a source of vibration, attach a vibration dampening device to the servo driver mounting surface.
- 9 Do not touch the rotating parts of the motor during operation.
- 10 Do not touch the keyway of the motor output shaft with bare hands.
- 11 Do not put hands inside the servo driver.
- 12 Do not touch the heat sink and peripheral devices of the motor or servo driver, as they can get very hot.
- 13 Do not performing wiring or operate the product with wet hands.

# **DANGER**



- 14 Wiring work should be carried out by an electrical engineer.
- 15 Motors other than that specified do not include protective devices. Protect them using overcurrent protection devices, ground-fault circuit interrupters, overheating prevention devices, emergency stop devices, etc.
- 16 Before operating the servo driver following an earthquake, ensure that the servo driver and motor are properly installed and that the machine is safe.
- 17 After the power supply is switched off, the internal circuit will be charged at high voltage for a period of time. When relocating, wiring, or inspecting the driver, ensure that the power supply input is completely disconnected on the outside of the servo driver and wait at least 15 minutes before carrying out any work.
- 18 Install and set up the product so that it does not cause fire or personal injury in the event of an earthquake.
- 19 Install an external emergency stop circuit must be installed to enable the power supply to be immediately disconnected in the event of an emergency.
- 20 Install the motor, servo driver, and peripheral devices to nonflammable materials such as metal.
- 21 Ensure that the product is wired correctly and securely. Insecure or incorrect wiring may cause the motor to malfunction or lead to thermal damage. Also, do not allow any conductive materials such as wire debris to enter the servo driver during installation and wiring.
- 22 Ensure that the cables are securely connected and that energized parts are insulated.
- 23 Binding and inserting wires into a metal duct will cause the temperature to increase, which will result in reduced wire current capacity and possibly lead to thermal damage. Please consider the current reduction coefficient before deciding on how to wire the product.
- 24 Make sure to install a molded case circuit breaker (MCCB) to the power supply. Also, make sure to ground the ground terminal or ground wire.
- 25 Securely tighten the screws for connecting the terminal block, as well as the grounding screw, using the torque indicated in the specification sheet.
- 26 When constructing a system using safety features, make sure you understand and comply with the relevant safety standards as well as the information in our user manuals or technical reference documents.

# **CAUTION**



- 27 When transporting the product, do not hold it by the cable or motor shaft.
- 28 When adjusting the parameters of the servo driver, do not set the gain too high or make extreme modifications to settings simultaneously, as doing so may result in unstable operation.
- 29 Following a power outage, do not get close to the machine once power is restored, as it may restart suddenly. Settings must be made to ensure personal safety even in event the machine restarts suddenly.
- 30 Do not approach the motor or the machine when it is running during power-up to ensure safety in the event of an unexpected malfunction.
- 31 Do not subject the motor shaft to strong shock.
- 32 Do not turn the servo driver main power supply on and off more frequently than necessary.
- 33 Do not use the electromagnetic contactor installed on the main power supply side to start or stop the motor.
- 34 If the motor has a built-in brake, it is for maintenance purposes and should not be used as a stopping (braking) device in order to ensure machine safety.
- 35 Do not drop or tip over the product during transportation or installation.
- 36 Do not climb on the motor or place heavy objects on it.
- 37 Do not cover the servo driver louver or allow any foreign objects to enter.
- 38 Do not expose the product to direct sunlight. When storing the product, keep it away direct sunlight and store at temperatures and humidity within the specified ranges.
- 39 Do not attempt to overhaul or modify the motor. Overhauls must be carried out by Panasonic or an authorized dealer.
- 40 Do not start or stop the device by turning the servo-on command (SRV-ON) on or off as this may damage the dynamic braking circuit incorporated into the servo drive.

# **CAUTION**



- 41 Use the motor and servo driver in the combination specified by Panasonic. If combining the motor with a different servo driver, make sure to confirm its performance and safety.
- 42 Failure of the motor or the servo driver it is combined with may result in thermal damage to the motor and may cause smoke and dust to be emitted. Please consider these possibilities when using the device in cleanrooms, etc.
- 43 Make sure the device is mounted in a manner suitable for the power output and the weight of the unit.
- 44 Keep the ambient temperature and humidity of the servo driver and motor are within the permitted ambient temperature and humidity ranges.
- 45 Observe the specified mounting method and orientation.
- 46 Keep the required distance between the servo driver and the control panel interior or other equipment.
- 47 If an eyebolt is attached to the motor, it should only be used to transport the motor and not to transport any other equipment. The eyebolt should also not be used if a decelerator, face plate, etc., is attached.
- 48 Connect the brake control relay in series with the relay that disconnects in the event of an emergency stop.
- 49 To perform a test run, secure the motor and check its operation with it disconnected from the mechanical system, then mount it onto the machine.
- 50 Confirm that the input power supply voltage is in line with the servo driver specifications before turning it on and operating.
- 51 In the event of an alarm, eliminate the cause of the alarm and restart the device.
- 52 If the motor has a built-in brake, it may not last due to reasons such as its life span or mechanical structure. A stopping device must be installed on the machine side to ensure safety.
- 53 The motor and servo drive emit heat while the motor is in operation. Ambient temperature may rise abnormally if used in an enclosed area. Take care to ensure that the ambient temperatures of the motor and servo driver are within the operating range.
- 54 Maintenance and inspections should be performed by a specialist.
- 55 Make sure to turn off the power supply if the device will not be used for a long period of time.
- 56 If the dynamic brake built into the servo driver is applied when the device is operating at a high speed, allow a stop time of approximately 10 minutes. Failure to do so may cause the internal circuit to disconnect or the brake to no longer be operable.
- 57 Secure the cables so that they do not put stress on the connectors, terminal block, or other connections.


- The capacitance of the capacitors of the power supply rectifier circuit will drop over time. To avoid a secondary problem due to a failure, replacement is recommended approx. every five years. Replacement must be carried out by Panasonic or an authorized dealer.
- Be sure to read operating manual (safety guide) included with product before use.

## **Servo Driver Ambient Temperature**

The life span of the servo driver is largely dependent on the ambient temperature.

Make sure that the ambient temperature within 50 mm of the servo driver does not exceed the operating temperature range.

If it is not possible to measure the temperature from a distance of 50 mm, instead measure at the midpoint of the gap between the obstacle preventing measurement and the servo driver.

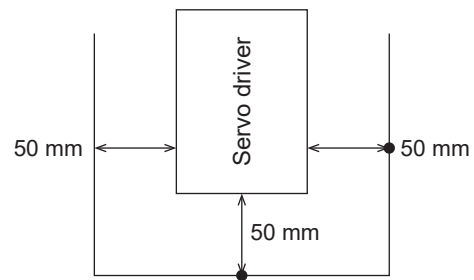**Front view**

Operating temperature range: 0–55 °C

## 11 Life span

(Life span is not guaranteed.)

### 11.1 Expected Life span of Servo Driver

When used continuously under the following conditions, the expected life span is 28,000 hours.

Definition of life span: "Life span" is defined as the time it takes for the electrolytic capacitor to decrease in capacity by 20% once shipped from the factory.

|           |                        |                                                                                                          |
|-----------|------------------------|----------------------------------------------------------------------------------------------------------|
| Condition | Input power supply     | : Single-phase AC 100 V 50/60 Hz,<br>Single-phase/3-phase AC 200 V 50/60 Hz<br>3-phase AC 400 V 50/60 Hz |
|           | Ambient temperature    | : 55 °C                                                                                                  |
|           | Height above sea level | : 100 m or less                                                                                          |
|           | Output torque:         | : Rated torque constant                                                                                  |
|           | Speed                  | : Rated speed constant                                                                                   |

The life span varies greatly depending on the conditions of use.

### 11.2 Standard Life span

#### ■ Inrush Current Prevention Circuit

The expected life span of the inrush current prevention circuit is approximately 20,000 cycles. Note that criteria may vary depending on environmental and working conditions.

#### ■ Cooling Fan

The standard replacement time for the cooling fan is approximately 20,000 hours. Note that criteria may vary depending on environmental and working conditions.

## 12 Warranty

### 12.1 Warranty Period

The warranty period for the product is one year from the date of purchase or one year and six months from the date the product was manufactured.

However, the warranty will be void in any of the following cases, even within the warranty period:

- 1 If the issue is due to incorrect use or improper repair/modification
- 2 If the issue is due to the device being dropped after purchase or damaged during transit
- 3 If the issue is due to the device being used outside of its specifications
- 4 If the issue is due to a fire, earthquake, lightning strike, wind/water damage, salt damage, voltage abnormalities, other natural disasters, or natural damage
- 5 If the issue is due to ingress of water, oil, metal fragments, or other foreign objects
- 6 If parts with a stated standard life span have exceeded their respective life spans

### 12.2 Warranty Coverage

If the product fails during the warranty period for reason in which our company is at fault, we will only replace or repair the defective parts of the device that were provided by us. Please note that our above-stated responsibility is limited to the replacement and repair of the equipment provided by us and that we do not accept any responsibility for damage to your company or any third party that may occur in connection with the failure of the equipment provided by us.

We do not accept responsibility for any equipment failures or damage to your company or any third party in the case of any of the exclusions set forth in 12-1 above or in any of the following cases:

- 1 If the equipment has been incorporated or used in a way that does not conform to the instructions or precautions set forth in this specifications document
- 2 If the issue is due to a combination of products that incorporate different equipment
- 3 If you fail to comply with the requests made to your company in this specifications document
- 4 If the equipment failure is not caused by our company's actions

### 12.3 Warranty Service

If you require the warranty service (fault cause investigation, repair, etc.), please contact the retailer from which you purchased the product.

If you wish to send it directly to us with the permission of the retailer, please receive a repair/investigation request form from the place of purchase, fill out the necessary information, and send it to our motor service desk along with the product.

As a general rule, you will be responsible for shipping costs.

## 13 Network Security

As you will use this product connected to a network, your attention is called to the following security risks.

- 1 Leakage or theft of information through this product
- 2 Unauthorized operation of this product by a malicious third party.
- 3 Interference of this product by a malicious third party.

It is the customer's responsibility to ensure that sufficient network security measures are taken, including those listed below.

We are not responsible for any damage caused by insufficient network security.

### Precautions

- This product is to be used in an environment where only a limited number of parties are permitted access to the product.
- This product is not to be installed in locations where the product and its accessories, such as cables, can be easily destroyed.
- This product is to be used on a network that is not connected to the Internet.
- If an external device, such as a computer or tablet, is connected to this product, there are concerns about the effects of computer viruses and unauthorized programs.

Take appropriate security measures with external devices, such as ensuring that they are checked for computer viruses and that regularly cleaning of such viruses is performed before connecting them.

- If the product is to be disposed of, transferred, repaired, or otherwise transferred to a third party, important information may also be recorded on the product.

At customer's risk, please handle it with care, such as erasing it.

## 14 Additional Precautions

- 1 Precautions to be taken when exporting the product or equipment incorporating the product  
If the end user or end use of this product is related to the military or weaponry, etc., it may be subject to export restrictions as set forth in the Foreign Exchange and Foreign Trade Act. When exporting, please review and follow the necessary export procedures.
- 2 This product is designed for general industrial use. This product is not for use in devices critical to human wellbeing or in specialized environments, such as nuclear power control, aerospace equipment, transportation systems, medical equipment, various safety devices, or equipment that requires a high degree of cleanliness.
- 3 Please ensure that finished equipment complies with standards, laws, and regulations, and confirm that the structure, dimensions, life span, and characteristics of the product match those of your installed equipment and components.
- 4 Since it is possible, albeit unlikely, that your finished equipment will operate abnormally due to a malfunction of our product (such as due to signal disconnections, signal open phases, or operation performed outside the settings as a result of external noise or static electricity being applied), please put in place failsafes and ensure adequate safety within the operational range of your site.
- 5 Make sure to follow indications as overloading products can cause loads to collapse.
- 6 Ensure that the motor shaft is not operated without being electrically grounded, as this may lead to electrolytic corrosion of the motor bearing and increased bearing noise, depending on the machine and the installation environment.
- 7 A tightening torque appropriate for the product mounting screws should be chosen to avoid loosening or damage, taking into account the strength of the screws used and the material to which they are mounted.
- 8 Because noise immunity may be affected by wiring conditions (e.g., grounding methods, cable length, signal wire shielding), please confirm the noise immunity of your equipment.
- 9 When disposing of the servo driver or motor, treat them as industrial waste.
- 10 When disposing of batteries, insulate them with tape and dispose of them in accordance with local regulations.
- 11 In order to improve performance, etc., some components of the product might be changed within the acceptable range in the specifications document.
- 12 Changes to specifications shall be reflected in the specifications document or in a document specified by your company. If this affects the function or characteristics of the product, the specifications will be changed following a test with a prototype.
- 13 Changes in specifications may affect the price of the product.
- 14 If you require clarification on something that is not covered by this specifications document, please contact us in advance.
- 15 In the event of a problem, the two parties shall resolve the issue following consultations as set forth in this specifications document.
- 16 Depending on the nature of the failure of the product, an amount of smoke equivalent to one cigarette may be emitted.  
Please consider these possibilities when using the device in cleanrooms, etc.
- 17 Do not use detergents containing benzene, thinner, alcohol, acid, or alkaline as this may cause discoloration or damage to the product's exterior.
- 18 Do not reverse engineer, decompile, or disassemble this product.
- 19 All motors with input power 400 V drivers and some motors with input power 200 V drivers use a Chinese-made rare earth magnet.  
The patent licensor has imposed certain restrictions on the regions in which these magnets can be distributed. To avoid infringement of the licensing terms, do not carry the motor into Japan or into another country via Japan, either by itself or as part of set.

## 15 Model Specifications

|                                            |                                              |                                              |                                              |                                              |
|--------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|
| Product number                             | MADLN01SE<br>MADLN01SG<br>MADLT01SF          | MADLN11SE<br>MADLN11SG<br>MADLT11SF          | MADLN05SE<br>MADLN05SG<br>MADLT05SF          | MADLN15SE<br>MADLN15SG<br>MADLT15SF          |
| Power supply input                         | Single-phase 100 V                           | Single-phase 100 V                           | Single-phase/3-phase 200 V                   | Single-phase/3-phase 200 V                   |
| Maximum output current                     | 6 A                                          | 8 A                                          | 6 A                                          | 8 A                                          |
| Rotary encoder                             | 8388608 resolution                           | 8388608 resolution                           | 8388608 resolution                           | 8388608 resolution                           |
| Regenerative resistor                      | External                                     | External                                     | External                                     | External                                     |
| Auto-gain tuning function                  | Provided                                     | Provided                                     | Provided                                     | Provided                                     |
| Dynamic brake function                     | Provided                                     | Provided                                     | Provided                                     | Provided                                     |
| Absolute system                            | A6SE N/A<br>A6SG Available<br>A6SF Available | A6SE N/A<br>A6SG Available<br>A6SF Available | A6SE N/A<br>A6SG Available<br>A6SF Available | A6SE N/A<br>A6SG Available<br>A6SF Available |
| Operating ambient temperature              | 0–55 °C                                      | 0–55 °C                                      | 0–55 °C                                      | 0–55 °C                                      |
| Control power supply cable                 | HVSF 0.75 mm <sup>2</sup>                    | HVSF 0.75 mm <sup>2</sup>                    | HVSF 0.75 mm <sup>2</sup>                    | HVSF 0.75 mm <sup>2</sup>                    |
|                                            | AWG18                                        | AWG18                                        | AWG18                                        | AWG18                                        |
| Main power supply cable                    | HVSF 0.75–2.0 mm <sup>2</sup>                | HVSF 0.75–2.0 mm <sup>2</sup>                | HVSF 0.75–2.0 mm <sup>2</sup>                | HVSF 0.75–2.0 mm <sup>2</sup>                |
|                                            | AWG14–18                                     | AWG14–18                                     | AWG14–18                                     | AWG14–18                                     |
| Ground cable                               | HVSF 2.0 mm <sup>2</sup>                     | HVSF 2.0 mm <sup>2</sup>                     | HVSF 2.0 mm <sup>2</sup>                     | HVSF 2.0 mm <sup>2</sup>                     |
|                                            | AWG14                                        | AWG14                                        | AWG14                                        | AWG14                                        |
| Motor cable                                | HVSF 0.75–2.0 mm <sup>2</sup>                | HVSF 0.75–2.0 mm <sup>2</sup>                | HVSF 0.75–2.0 mm <sup>2</sup>                | HVSF 0.75–2.0 mm <sup>2</sup>                |
|                                            | AWG14–18                                     | AWG14–18                                     | AWG14–18                                     | AWG14–18                                     |
| Inrush current (main power supply) (*1)    | Max. 7 A                                     | Max. 7 A                                     | Max. 14 A                                    | Max. 14 A                                    |
| Inrush current (control power supply) (*1) | Max. 7 A                                     | Max. 7 A                                     | Max. 14 A                                    | Max. 14 A                                    |
| Product weight                             | Approx. 0.8 kg                               | Approx. 0.8 kg                               | Approx. 0.8 kg                               | Approx. 0.8 kg                               |
| External size                              | Size A                                       | Size A                                       | Size A                                       | Size A                                       |

\*1 When the product power supply input voltage is the 100 V specification, the current is the value calculated with the voltage as 100 V. Likewise, the current is the value calculated with the voltage as 200 V when the product power input voltage is the 200 V specification.

|                                            |                                              |                                              |                                              |                                              |
|--------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|
| Product number                             | MBDLN21SE<br>MBDLN21SG<br>MBDLT21SF          | MBDLN25SE<br>MBDLN25SG<br>MBDLT25SF          | MCDLN31SE<br>MCDLN31SG<br>MCDLT31SF          | MCDLN35SE<br>MCDLN35SG<br>MCDLT35SF          |
| Power supply input                         | Single-phase 100 V                           | Single-phase/3-phase 200 V                   | Single-phase 100 V                           | Single-phase/3-phase 200 V                   |
| Maximum output current                     | 12 A                                         | 12 A                                         | 22 A                                         | 22 A                                         |
| Rotary encoder                             | 8388608 resolution                           | 8388608 resolution                           | 8388608 resolution                           | 8388608 resolution                           |
| Regenerative resistor                      | External                                     | External                                     | Built-in                                     | Built-in                                     |
| Auto-gain tuning function                  | Provided                                     | Provided                                     | Provided                                     | Provided                                     |
| Dynamic brake function                     | Provided                                     | Provided                                     | Provided                                     | Provided                                     |
| Absolute system                            | A6SE N/A<br>A6SG Available<br>A6SF Available | A6SE N/A<br>A6SG Available<br>A6SF Available | A6SE N/A<br>A6SG Available<br>A6SF Available | A6SE N/A<br>A6SG Available<br>A6SF Available |
| Operating ambient temperature              | 0–55 °C                                      | 0–55 °C                                      | 0–55 °C                                      | 0–55 °C                                      |
| Control power supply cable                 | HVSF 0.75 mm <sup>2</sup>                    | HVSF 0.75 mm <sup>2</sup>                    | HVSF 0.75 mm <sup>2</sup>                    | HVSF 0.75 mm <sup>2</sup>                    |
|                                            | AWG18                                        | AWG18                                        | AWG18                                        | AWG18                                        |
| Main power supply cable                    | HVSF 0.75–2.0 mm <sup>2</sup>                | HVSF 0.75–2.0 mm <sup>2</sup>                | HVSF 0.75–2.0 mm <sup>2</sup>                | HVSF 0.75–2.0 mm <sup>2</sup>                |
|                                            | AWG14–18                                     | AWG14–18                                     | AWG14–18                                     | AWG14–18                                     |
| Ground cable                               | HVSF 2.0 mm <sup>2</sup>                     | HVSF 2.0 mm <sup>2</sup>                     | HVSF 2.0 mm <sup>2</sup>                     | HVSF 2.0 mm <sup>2</sup>                     |
|                                            | AWG14                                        | AWG14                                        | AWG14                                        | AWG14                                        |
| Motor cable                                | HVSF 0.75–2.0 mm <sup>2</sup>                | HVSF 0.75–2.0 mm <sup>2</sup>                | HVSF 0.75–2.0 mm <sup>2</sup>                | HVSF 0.75–2.0 mm <sup>2</sup>                |
|                                            | AWG14–18                                     | AWG14–18                                     | AWG14–18                                     | AWG14–18                                     |
| Inrush current (main power supply) (*1)    | Max. 7 A                                     | Max. 14 A                                    | Max. 15 A                                    | Max. 29 A                                    |
| Inrush current (control power supply) (*1) | Max. 7 A                                     | Max. 14 A                                    | Max. 7 A                                     | Max. 14 A                                    |
| Product weight                             | Approx. 1.0 kg                               | Approx. 1.0 kg                               | Approx. 1.6 kg                               | Approx. 1.6 kg                               |
| External size                              | Size B                                       | Size B                                       | Size C                                       | Size C                                       |

\*1 When the product power supply input voltage is the 100 V specification, the current is the value calculated with the voltage as 100 V. Likewise, the current is the value calculated with the voltage as 200 V when the product power input voltage is the 200 V specification.

|                                            |                                              |                                              |                                              |                                              |
|--------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|
| Product number                             | MDDL N45SE<br>MDDL N45SG<br>MDDL T45SF       | MDDL N55SE<br>MDDL N55SG<br>MDDL T55SF       | MEDL N83SE<br>MEDL N83SG<br>MEDL T83SF       | MEDL N93SE<br>MEDL N93SG<br>MEDL T93SF       |
| Power supply input                         | Single-phase/3-phase 200 V                   | Single-phase/3-phase 200 V                   | 3-phase 200 V                                | 3-phase 200 V                                |
| Maximum output current                     | 24 A                                         | 40 A                                         | 60 A                                         | 80 A                                         |
| Rotary encoder                             | 8388608 resolution                           | 8388608 resolution                           | 8388608 resolution                           | 8388608 resolution                           |
| Regenerative resistor                      | Built-in                                     | Built-in                                     | Built-in                                     | Built-in                                     |
| Auto-gain tuning function                  | Provided                                     | Provided                                     | Provided                                     | Provided                                     |
| Dynamic brake function                     | Provided                                     | Provided                                     | Provided                                     | Provided                                     |
| Absolute system                            | A6SE N/A<br>A6SG Available<br>A6SF Available | A6SE N/A<br>A6SG Available<br>A6SF Available | A6SE N/A<br>A6SG Available<br>A6SF Available | A6SE N/A<br>A6SG Available<br>A6SF Available |
| Operating ambient temperature              | 0–55 °C                                      | 0–55 °C                                      | 0–55 °C                                      | 0–55 °C                                      |
| Control power supply cable                 | HVSF 0.75 mm <sup>2</sup>                    | HVSF 0.75 mm <sup>2</sup>                    | HVSF 0.75 mm <sup>2</sup>                    | HVSF 0.75 mm <sup>2</sup>                    |
|                                            | AWG18                                        | AWG18                                        | AWG18                                        | AWG18                                        |
| Main power supply cable                    | HVSF 2.0 mm <sup>2</sup>                     | HVSF 2.0 mm <sup>2</sup>                     | HVSF 2.0 mm <sup>2</sup>                     | HVSF 2.0 mm <sup>2</sup>                     |
|                                            | AWG14                                        | AWG14                                        | AWG14                                        | AWG14                                        |
| Ground cable                               | HVSF 2.0 mm <sup>2</sup>                     | HVSF 2.0 mm <sup>2</sup>                     | HVSF 2.0 mm <sup>2</sup>                     | HVSF 2.0 mm <sup>2</sup>                     |
|                                            | AWG14                                        | AWG14                                        | AWG14                                        | AWG14                                        |
| Motor cable                                | HVSF 2.0mm <sup>2</sup>                      | HVSF 2.0 mm <sup>2</sup>                     | HVSF 2.0 mm <sup>2</sup>                     | HVSF 3.5 mm <sup>2</sup>                     |
|                                            | AWG14                                        | AWG14                                        | AWG14                                        | AWG12                                        |
| Inrush current (main power supply) (*1)    | Max. 29 A                                    | Max. 29 A                                    | Max. 29 A                                    | Max. 29 A                                    |
| Inrush current (control power supply) (*1) | Max. 14 A                                    | Max. 14 A                                    | Max. 14 A                                    | Max. 14 A                                    |
| Product weight                             | Approx. 2.1 kg                               | Approx. 2.1 kg                               | Approx. 2.7 kg                               | Approx. 2.7 kg                               |
| External size                              | Size D                                       | Size D                                       | Size E                                       | Size E                                       |

\*1 When the product power supply input voltage is the 100 V specification, the current is the value calculated with the voltage as 100 V. Likewise, the current is the value calculated with the voltage as 200 V when the product power input voltage is the 200 V specification.

|                                            |                                              |                                              |
|--------------------------------------------|----------------------------------------------|----------------------------------------------|
| Product number                             | MFDLNA3SE<br>MFDLNA3SG<br>MFDLTA3SF          | MFDLNB3SE<br>MFDLNB3SG<br>MFDLTB3SF          |
| Power supply input                         | 3-phase 200 V                                | 3-phase 200 V                                |
| Maximum output current                     | 100 A                                        | 120 A                                        |
| Rotary encoder                             | 8388608 resolution                           | 8388608 resolution                           |
| Regenerative resistor                      | Built-in                                     | Built-in                                     |
| Auto-gain tuning function                  | Provided                                     | Provided                                     |
| Dynamic brake function                     | Provided                                     | Provided                                     |
| Absolute system                            | A6SE N/A<br>A6SG Available<br>A6SF Available | A6SE N/A<br>A6SG Available<br>A6SF Available |
| Operating ambient temperature              | 0–55 °C                                      | 0–55 °C                                      |
| Control power supply cable                 | HVSF 0.75 mm <sup>2</sup>                    | HVSF 0.75 mm <sup>2</sup>                    |
|                                            | AWG18                                        | AWG18                                        |
| Main power supply cable                    | HVSF 3.5 mm <sup>2</sup>                     | HVSF 3.5 mm <sup>2</sup>                     |
|                                            | AWG12                                        | AWG12                                        |
| Ground cable                               | HVSF 3.5 mm <sup>2</sup>                     | HVSF 3.5 mm <sup>2</sup>                     |
|                                            | AWG12                                        | AWG12                                        |
| Motor cable                                | HVSF 3.5 mm <sup>2</sup>                     | HVSF 3.5 mm <sup>2</sup>                     |
|                                            | AWG12                                        | AWG12                                        |
| Inrush current (main power supply) (*1)    | Max. 22 A                                    | Max. 22 A                                    |
| Inrush current (control power supply) (*1) | Max. 14 A                                    | Max. 14 A                                    |
| Product weight                             | Approx. 5.2 kg                               | Approx. 5.2 kg                               |
| External size                              | Size F                                       | Size F                                       |

\*1 When the product power supply input voltage is the 100 V specification, the current is the value calculated with the voltage as 100 V. Likewise, the current is the value calculated with the voltage as 200 V when the product power input voltage is the 200 V specification.

|                                            |                           |                           |                           |
|--------------------------------------------|---------------------------|---------------------------|---------------------------|
| Product number                             | MGDLTC3SF                 | MHDLTE3SF                 | MHDLTF3SF                 |
| Power supply input                         | 3-phase 200 V             | 3-phase 200 V             | 3-phase 200 V             |
| Maximum output current                     | 165 A                     | 240 A                     | 360 A                     |
| Rotary encoder                             | 8388608 resolution        | 8388608 resolution        | 8388608 resolution        |
| Regenerative resistor                      | External                  | External                  | External                  |
| Auto-gain tuning function                  | Provided                  | Provided                  | Provided                  |
| Dynamic brake function                     | Provided                  | None                      | None                      |
| Absolute system                            | Available                 | Available                 | Available                 |
| Operating ambient temperature              | 0–55 °C                   | 0–55 °C                   | 0–55 °C                   |
| Control power supply cable                 | HVSF 0.75 mm <sup>2</sup> | HVSF 0.75 mm <sup>2</sup> | HVSF 0.75 mm <sup>2</sup> |
|                                            | AWG18                     | AWG18                     | AWG18                     |
| Main power supply cable                    | HVSF 8.0 mm <sup>2</sup>  | HVSF 22 mm <sup>2</sup>   | HVSF 38 mm <sup>2</sup>   |
|                                            | AWG8                      | AWG4                      | AWG2                      |
| Ground cable                               | HVSF 8.0 mm <sup>2</sup>  | HVSF 22 mm <sup>2</sup>   | HVSF 38 mm <sup>2</sup>   |
|                                            | AWG8                      | AWG4                      | AWG2                      |
| Motor cable                                | HVSF 14 mm <sup>2</sup>   | HVSF 22 mm <sup>2</sup>   | HVSF 38 mm <sup>2</sup>   |
|                                            | AWG6                      | AWG4                      | AWG2                      |
| Inrush current (main power supply) (*1)    | Max. 66 A                 | Max. 66 A                 | Max. 66 A                 |
| Inrush current (control power supply) (*1) | Max. 15 A                 | Max. 15 A                 | Max. 15 A                 |
| Product weight                             | Approx. 8.2 kg            | Approx. 14.2 kg           | Approx. 15.2 kg           |
| External size                              | Size G                    | Size H                    | Size H                    |

\*1 When the product power supply input voltage is the 100 V specification, the current is the value calculated with the voltage as 100 V. Likewise, the current is the value calculated with the voltage as 200 V when the product power input voltage is the 200 V specification.

|                                            |                           |                           |                           |                           |
|--------------------------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Product number                             | MDDLT44SF                 | MDDLT54SF                 | MDDLT64SF                 | MEDLT84SF                 |
| Power supply input                         | 3-phase 400 V             | 3-phase 400 V             | 3-phase 400 V             | 3-phase 400 V             |
| Maximum output current                     | 6.5 A                     | 13 A                      | 20 A                      | 28 A                      |
| Rotary encoder                             | 8388608 resolution        | 8388608 resolution        | 8388608 resolution        | 8388608 resolution        |
| Regenerative resistor                      | Built-in                  | Built-in                  | Built-in                  | Built-in                  |
| Auto-gain tuning function                  | Provided                  | Provided                  | Provided                  | Provided                  |
| Dynamic brake function                     | Provided                  | Provided                  | Provided                  | Provided                  |
| Absolute system                            | Available                 | Available                 | Available                 | Available                 |
| Operating ambient temperature              | 0–55 °C                   | 0–55 °C                   | 0–55 °C                   | 0–55 °C                   |
| Control power supply cable                 | HVSF 0.52 mm <sup>2</sup> | HVSF 0.52 mm <sup>2</sup> | HVSF 0.52 mm <sup>2</sup> | HVSF 0.52 mm <sup>2</sup> |
|                                            | AWG20                     | AWG20                     | AWG20                     | AWG20                     |
| Main power supply cable                    | HVSF 2.0 mm <sup>2</sup>  | HVSF 2.0 mm <sup>2</sup>  | HVSF 2.0 mm <sup>2</sup>  | HVSF 2.0 mm <sup>2</sup>  |
|                                            | AWG14                     | AWG14                     | AWG14                     | AWG14                     |
| Ground cable                               | HVSF 2.0 mm <sup>2</sup>  | HVSF 2.0 mm <sup>2</sup>  | HVSF 2.0 mm <sup>2</sup>  | HVSF 2.0 mm <sup>2</sup>  |
|                                            | AWG14                     | AWG14                     | AWG14                     | AWG14                     |
| Motor cable                                | HVSF 2.0mm <sup>2</sup>   | HVSF 2.0mm <sup>2</sup>   | HVSF 2.0 mm <sup>2</sup>  | HVSF 2.0 mm <sup>2</sup>  |
|                                            | AWG14                     | AWG14                     | AWG14                     | AWG14                     |
| Inrush current (main power supply) (*1)    | Max. 30 A                 | Max. 30 A                 | Max. 30 A                 | Max. 30 A                 |
| Inrush current (control power supply) (*1) | Max. 48 A                 | Max. 48 A                 | Max. 48 A                 | Max. 48 A                 |
| Product weight                             | Approx. 2.1 kg            | Approx. 2.1 kg            | Approx. 2.1 kg            | Approx. 2.7 kg            |
| External size                              | Size D                    | Size D                    | Size D                    | Size E                    |

\*1 When the product power input voltage is the 400 V specification, the current is the value calculated with the voltage as 400 V (control power supply: DC 24 V).

|                                            |                           |                           |
|--------------------------------------------|---------------------------|---------------------------|
| Product number                             | MFDLTA4SF                 | MFDLTB4SF                 |
| Power supply input                         | 3-phase 400 V             | 3-phase 400 V             |
| Maximum output current                     | 40 A                      | 60 A                      |
| Rotary encoder                             | 8388608 resolution        | 8388608 resolution        |
| Regenerative resistor                      | Built-in                  | Built-in                  |
| Auto-gain tuning function                  | Provided                  | Provided                  |
| Dynamic brake function                     | Provided                  | Provided                  |
| Absolute system                            | Available                 | Available                 |
| Operating ambient temperature              | 0–55 °C                   | 0–55 °C                   |
| Control power supply cable                 | HVSF 0.52 mm <sup>2</sup> | HVSF 0.52 mm <sup>2</sup> |
|                                            | AWG20                     | AWG20                     |
| Main power supply cable                    | HVSF 3.5 mm <sup>2</sup>  | HVSF 3.5 mm <sup>2</sup>  |
|                                            | AWG12                     | AWG12                     |
| Ground cable                               | HVSF 3.5 mm <sup>2</sup>  | HVSF 3.5 mm <sup>2</sup>  |
|                                            | AWG12                     | AWG12                     |
| Motor cable                                | HVSF 3.5 mm <sup>2</sup>  | HVSF 3.5 mm <sup>2</sup>  |
|                                            | AWG12                     | AWG12                     |
| Inrush current (main power supply) (*1)    | Max. 30 A                 | Max. 30 A                 |
| Inrush current (control power supply) (*1) | Max. 48 A                 | Max. 48 A                 |
| Product weight                             | Approx. 5.2 kg            | Approx. 5.2 kg            |
| External size                              | Size F                    | Size F                    |

\*1 When the product power input voltage is the 400 V specification, the current is the value calculated with the voltage as 400 V (control power supply: DC 24 V).

## Appendix List of Default Parameters

The following pages show default parameters set when the servo driver is shipped from the factory.  
Operation must be confirmed for each customer machine before use and the optimal parameters set.

| MODEL | MINAS-A6 (SE/SG/SF) series common |
|-------|-----------------------------------|
|-------|-----------------------------------|

\* 1 Parameter with decimal point setup. Describe the decimal point value displayed on Panaterm. When checking the parameter file directly with text etc., the digits are shifted by the digits after the decimal point.  
Example) Pr 6.24 Load fluctuation correction filter Panaterm display: 0.53 Parameter file setup value: 53 Shift two decimal place digits \* 2 The maximum value of torque limit setup (Pr0.13, Pr 5.22, Pr 5.25, Pr 5.26) varies depending on the applicable motor.  
\* 3 Can not be used with [A6SE], [A6SG]. \* 4 Can not be used with [A6SE].

| PARAMETER |     |                                        |                                | MODEL | MINAS-A6 (SE/SG/SF) series common |                      |                                |  |      |     |                      |                                |      |     |           |               |
|-----------|-----|----------------------------------------|--------------------------------|-------|-----------------------------------|----------------------|--------------------------------|--|------|-----|----------------------|--------------------------------|------|-----|-----------|---------------|
| Cate      | Pr. | Parameter                              | Default value                  | Cate  | Pr.                               | Parameter            | Default value                  |  | Cate | Pr. | Parameter            | Default value                  | Cate | Pr. | Parameter | Default value |
| 1         | 0   | 1st position loop gain                 | Size A-C 48.0<br>Size D-H 32.0 | 1     | 31                                | For manufacturer use | Size A-C 48.0<br>Size D-H 32.0 |  | 1    | 62  | For manufacturer use | 0                              |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      | *1  |                      |                                |      |     |           |               |
|           | 1   | 1st velocity loop gain                 | Size A-C 27.0<br>Size D-H 18.0 |       | 32                                | For manufacturer use | Size A-C 27.0<br>Size D-H 18.0 |  |      | 63  | For manufacturer use | Size A-C 48.0<br>Size D-H 32.0 |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      | *1  |                      |                                |      |     |           |               |
|           | 2   | 1st velocity loop integral time        | Size A-C 21.0<br>Size D-H 31.0 |       | 33                                | For manufacturer use | Size A-C 21.0<br>Size D-H 31.0 |  |      | 64  | For manufacturer use | Size A-C 27.0<br>Size D-H 18.0 |      |     |           |               |
|           | *1  | constant                               |                                |       | *1                                |                      |                                |  |      | *1  |                      |                                |      |     |           |               |
|           | 3   | 1st Velocity detection filter          | 0                              |       | 34                                | For manufacturer use | Size A-C 0.84<br>Size D-H 1.26 |  |      | 65  | For manufacturer use | Size A-C 21.0<br>Size D-H 31.0 |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      | *1  |                      |                                |      |     |           |               |
|           | 4   | 1st Torque filter                      | Size A-C 0.84<br>Size D-H 1.26 |       | 35                                | For manufacturer use | 250                            |  |      | 66  | For manufacturer use | Size A-C 0.84<br>Size D-H 1.26 |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      | *1  |                      |                                |      |     |           |               |
|           | 5   | 2nd position loop gain                 | Size A-C 48.0<br>Size D-H 32.0 |       | 36                                | For manufacturer use | 100.0                          |  |      | 67  | For manufacturer use | 250                            |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      | *1  |                      |                                |      |     |           |               |
|           | 6   | 2nd velocity loop gain                 | Size A-C 27.0<br>Size D-H 18.0 |       | 37                                | For manufacturer use | 100.0                          |  |      | 68  | For manufacturer use | 100.0                          |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      | *1  |                      |                                |      |     |           |               |
|           | 7   | 2nd velocity loop integral time        | Size A-C 21.0<br>Size D-H 31.0 |       | 38                                | For manufacturer use | 0                              |  |      | 69  | For manufacturer use | 100.0                          |      |     |           |               |
|           | *1  | constant                               |                                |       | *1                                |                      |                                |  |      | *1  |                      |                                |      |     |           |               |
|           | 8   | 2nd velocity detection filter          | 0                              |       | 39                                | For manufacturer use | Size A-C 48.0<br>Size D-H 32.0 |  |      | 70  | For manufacturer use | 0                              |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      | *1  |                      |                                |      |     |           |               |
|           | 9   | 2nd torque filter                      | Size A-C 0.84<br>Size D-H 1.26 |       | 40                                | For manufacturer use | Size A-C 27.0<br>Size D-H 18.0 |  |      | 71  | For manufacturer use | Size A-C 48.0<br>Size D-H 32.0 |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      | *1  |                      |                                |      |     |           |               |
|           | 10  | Velocity feed forward gain             | 100.0                          |       | 41                                | For manufacturer use | Size A-C 21.0<br>Size D-H 31.0 |  |      | 72  | For manufacturer use | Size A-C 27.0<br>Size D-H 18.0 |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      | *1  |                      |                                |      |     |           |               |
|           | 11  | Velocity feed forward filter           | 0                              |       | 42                                | For manufacturer use | Size A-C 0.84<br>Size D-H 1.26 |  |      | 73  | For manufacturer use | Size A-C 21.0<br>Size D-H 31.0 |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      | *1  |                      |                                |      |     |           |               |
|           | 12  | Torque feed forward gain               | 100.0                          |       | 43                                | For manufacturer use | 250                            |  |      | 74  | For manufacturer use | Size A-C 0.84<br>Size D-H 1.26 |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      | *1  |                      |                                |      |     |           |               |
|           | 13  | Torque feed forward filter             | 0                              |       | 44                                | For manufacturer use | 100.0                          |  |      | 75  | For manufacturer use | 250                            |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      | *1  |                      |                                |      |     |           |               |
|           | 14  | 2nd gain setup                         | 1                              |       | 45                                | For manufacturer use | 100.0                          |  |      | 76  | For manufacturer use | 100.0                          |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      | *1  |                      |                                |      |     |           |               |
|           | 15  | Position control switching mode        | 0                              |       | 46                                | For manufacturer use | 0                              |  |      | 77  | For manufacturer use | 100.0                          |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      | *1  |                      |                                |      |     |           |               |
|           | 16  | Position control switching delay time  | 1.0                            |       | 47                                | For manufacturer use | Size A-C 48.0<br>Size D-H 32.0 |  |      | 78  | For manufacturer use | 0                              |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      | *1  |                      |                                |      |     |           |               |
|           | 17  | Position control switching level       | 0                              |       | 48                                | For manufacturer use | Size A-C 27.0<br>Size D-H 18.0 |  |      |     |                      |                                |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      |     |                      |                                |      |     |           |               |
|           | 18  | Position control switching hysteresis  | 0                              |       | 49                                | For manufacturer use | Size A-C 21.0<br>Size D-H 31.0 |  |      |     |                      |                                |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      |     |                      |                                |      |     |           |               |
|           | 19  | Position gain switching time           | 1.0                            |       | 50                                | For manufacturer use | Size A-C 0.84<br>Size D-H 1.26 |  |      |     |                      |                                |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      |     |                      |                                |      |     |           |               |
|           | 20  | Velocity control switching mode        | 0                              |       | 51                                | For manufacturer use | 250                            |  |      |     |                      |                                |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      |     |                      |                                |      |     |           |               |
|           | 21  | Velocity control switching delay time  | 0.0                            |       | 52                                | For manufacturer use | 100.0                          |  |      |     |                      |                                |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      |     |                      |                                |      |     |           |               |
|           | 22  | Velocity control switching level       | 0                              |       | 53                                | For manufacturer use | 100.0                          |  |      |     |                      |                                |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      |     |                      |                                |      |     |           |               |
|           | 23  | Velocity control switching hysteresis  | 0                              |       | 54                                | For manufacturer use | 0                              |  |      |     |                      |                                |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      |     |                      |                                |      |     |           |               |
|           | 24  | Torque control switching mode          | 0                              |       | 55                                | For manufacturer use | Size A-C 48.0<br>Size D-H 32.0 |  |      |     |                      |                                |      |     |           |               |
|           | *3  |                                        |                                |       | *1                                |                      |                                |  |      |     |                      |                                |      |     |           |               |
|           | 25  | Torque control switching delay time *3 | 0                              |       | 56                                | For manufacturer use | Size A-C 27.0<br>Size D-H 18.0 |  |      |     |                      |                                |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      |     |                      |                                |      |     |           |               |
|           | 26  | Torque control switching level*3       | 0                              |       | 57                                | For manufacturer use | Size A-C 21.0<br>Size D-H 31.0 |  |      |     |                      |                                |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      |     |                      |                                |      |     |           |               |
|           | 27  | Torque control switching hysteresis *3 | 0                              |       | 58                                | For manufacturer use | Size A-C 0.84<br>Size D-H 1.26 |  |      |     |                      |                                |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      |     |                      |                                |      |     |           |               |
|           | 28  | For manufacturer use                   | 100.0                          |       | 59                                | For manufacturer use | 250                            |  |      |     |                      |                                |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      |     |                      |                                |      |     |           |               |
|           | 29  | For manufacturer use                   | 100.0                          |       | 60                                | For manufacturer use | 100.0                          |  |      |     |                      |                                |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      |     |                      |                                |      |     |           |               |
|           | 30  | For manufacturer use                   | 0                              |       | 61                                | For manufacturer use | 100.0                          |  |      |     |                      |                                |      |     |           |               |
|           | *1  |                                        |                                |       | *1                                |                      |                                |  |      |     |                      |                                |      |     |           |               |

\* 1 Parameter with decimal point setup. Describe the decimal point value displayed on Panaterm. When checking the parameter file directly with text etc., the digits are shifted by the digits after the decimal point.  
Example) Pr 6.24 Load fluctuation correction filter Panaterm display: 0.53 Parameter file setup value: 53 Shift two decimal place digits \* 2 The maximum value of torque limit setup (Pr0.13, Pr 5.22, Pr 5.25, Pr 5.26) varies depending on the applicable motor.  
\* 3 Can not be used with [A6SE], [A6SG]. \* 4 Can not be used with [A6SE].

| PARAMETER |          |                                    |                               | MODEL |     | MINAS-A6 (SE/SG/SF) series common |               |      |     |           |               |      |     |           |               |      |     |           |               |
|-----------|----------|------------------------------------|-------------------------------|-------|-----|-----------------------------------|---------------|------|-----|-----------|---------------|------|-----|-----------|---------------|------|-----|-----------|---------------|
| Cate      | Pr.      | Parameter                          | Default value                 | Cate  | Pr. | Parameter                         | Default value | Cate | Pr. | Parameter | Default value | Cate | Pr. | Parameter | Default value | Cate | Pr. | Parameter | Default value |
| 2         | 0        | Adaptation filter mode             | [SE][SG] 1<br>[SF] 0          | 2     | 31  | For manufacturer use              | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 1        | 1st notch frequency                | 5000                          |       | 32  | For manufacturer use              | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 2        | 1st notch width                    | 2                             |       | 33  | For manufacturer use              | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 3        | 1st notch depth                    | 0                             |       | 34  | For manufacturer use              | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 4        | 2nd notch frequency                | 5000                          |       | 35  | For manufacturer use              | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 5        | 2nd notch width                    | 2                             |       | 36  | For manufacturer use              | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 6        | 2nd notch depth                    | 0                             |       | 37  | For manufacturer use              | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 7        | 3rd notch frequency                | 5000                          |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 8        | 3rd notch width                    | 2                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 9        | 3rd notch depth                    | 0                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 10       | 4th notch frequency                | 5000                          |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 11       | 4th notch width                    | 2                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 12       | 4th notch depth                    | 0                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 13       | Damping filter switching selection | 0                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 14<br>*1 | 1st damping frequency              | 0                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 15<br>*1 | 1st damping filter setup           | 0                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 16<br>*1 | 2nd damping frequency              | 0                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 17<br>*1 | 2nd damping filter setup           | 0                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 18<br>*1 | 3rd damping frequency              | 0                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 19<br>*1 | 3rd damping filter setup           | 0                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 20<br>*1 | 4th damping frequency              | 0                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 21<br>*1 | 4th damping filter setup           | 0                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 22<br>*1 | Command smoothing filter           | Size A-C 9.2<br>Size D-H 13.9 |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 23<br>*1 | Command FIR filter                 | 1.0                           |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 24       | 5th notch frequency                | 5000                          |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 25       | 5th notch width                    | 2                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 26       | 5th notch depth                    | 0                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 27       | 1st vibration control width setup  | 0                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 28       | 2nd vibration control width setup  | 0                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 29       | 3rd vibration control width setup  | 0                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 30       | 4th vibration control width setup  | 0                             |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |

\* 1 Parameter with decimal point setup. Describe the decimal point value displayed on Panaterm. When checking the parameter file directly with text etc., the digits are shifted by the digits after the decimal point.  
Example) Pr 6.24 Load fluctuation correction filter Panaterm display: 0.53 Parameter file setup value: 53 Shift two decimal place digits    \* 2 The maximum value of torque limit setup (Pr0.13, Pr 5.22, Pr 5.25, Pr 5.26) varies depending on the applicable motor.  
\* 3 Can not be used with [A6SE], [A6SG].    \* 4 Can not be used with [A6SE].

| PARAMETER |       |                                                                   |                      | MODEL |     | MINAS-A6 (SE/SG/SF) series common |               |      |     |           |               |      |     |           |               |      |     |           |               |
|-----------|-------|-------------------------------------------------------------------|----------------------|-------|-----|-----------------------------------|---------------|------|-----|-----------|---------------|------|-----|-----------|---------------|------|-----|-----------|---------------|
| Cate      | Pr.   | Parameter                                                         | Default value        | Cate  | Pr. | Parameter                         | Default value | Cate | Pr. | Parameter | Default value | Cate | Pr. | Parameter | Default value | Cate | Pr. | Parameter | Default value |
| 3         | 0     | Inside/outside speed setup switching                              | [SE][SG] 1<br>[SF] 0 |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 1     | Speed command direction designation selection                     | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 2     | Speed command input gain *3                                       | 500                  |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 3     | Speed command input inversion *3                                  | 1                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 4     | Speed setup,1st speed                                             | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 5     | Speed setup,2nd speed                                             | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 6     | Speed setup,3rd speed                                             | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 7     | Speed setup,4th speed                                             | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 8     | Speed setup,5th speed                                             | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 9     | Speed setup,6th speed                                             | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 10    | Speed setup,7th speed                                             | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 11    | Speed setup,8th speed                                             | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 12    | Acceleration time setup                                           | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 13    | Deceleration time setup                                           | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 14    | S-shape acceleration/deceleration setup                           | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 15    | Speed zero clamp function selection                               | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 16    | Zero clamp level speed setup                                      | 30                   |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 17    | Torque command selection *3                                       | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 18    | Torque command direction designation selection *3                 | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 19 *1 | Torque command input gain *3                                      | 3.0                  |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 20    | Torque command input inversion *3                                 | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 21    | Speed limit value 1 *3                                            | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 22    | Speed limit value 2 *3                                            | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 23    | External scale selection *3                                       | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 24    | External scale division numerator *3                              | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 25    | External scale division denominator *3                            | 10000                |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 26    | External scale direction inversion                                | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 27    | Invalidate external scale Z-phase wire disconnection detection *3 | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 28    | Hybrid deviation excess setup *3                                  | 16000                |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 29    | Hybrid deviation clear setup *3                                   | 0                    |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           |       |                                                                   |                      |       |     |                                   |               |      |     |           |               |      |     |           |               |      |     |           |               |

\* 1 Parameter with decimal point setup. Describe the decimal point value displayed on Panaterm. When checking the parameter file directly with text etc., the digits are shifted by the digits after the decimal point.  
Example) Pr 6.24 Load fluctuation correction filter Panaterm display: 0.53 Parameter file setup value: 53 Shift two decimal place digits    \* 2 The maximum value of torque limit setup (Pr0.13, Pr 5.22, Pr 5.25, Pr 5.26) varies depending on the applicable motor.  
\* 3 Can not be used with [A6SE], [A6SG].    \* 4 Can not be used with [A6SE].

| PARAMETER |     |                                         |               | MODEL |     | MINAS-A6 (SE/SG/SF) series common                    |               |      |     |           |               |      |     |           |               |      |     |           |               |
|-----------|-----|-----------------------------------------|---------------|-------|-----|------------------------------------------------------|---------------|------|-----|-----------|---------------|------|-----|-----------|---------------|------|-----|-----------|---------------|
| Cate      | Pr. | Parameter                               | Default value | Cate  | Pr. | Parameter                                            | Default value | Cate | Pr. | Parameter | Default value | Cate | Pr. | Parameter | Default value | Cate | Pr. | Parameter | Default value |
| 4         | 0   | SI1 Input selection                     | 8553090       | 4     | 31  | Positioning completion range                         | 10            |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 1   | SI2 Input selection                     | 8487297       |       | 32  | Positioning completion output setup                  | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 2   | SI3 Input selection                     | 9539850       |       | 33  | INP hold time                                        | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 3   | SI4 Input selection                     | 394758        |       | 34  | Zero speed                                           | 50            |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 4   | SI5 Input selection                     | 4108          |       | 35  | Speed coincidence width                              | 50            |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 5   | SI6 Input selection                     | 197379        |       | 36  | Attainment speed                                     | 1000          |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 6   | SI7 Input selection                     | 3847          |       | 37  | Mechanical braking setup during no operation         | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 7   | SI8 Input selection                     | 263172        |       | 38  | Mechanical braking setup during operation            | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 8   | SI9 Input selection                     | 328965        |       | 39  | Brake release speed setup                            | 30            |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 9   | SI10 Input selection                    | 3720          |       | 40  | Warning output selection 1                           | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 10  | SO1 Output selection                    | 197379        |       | 41  | Warning output selection 2                           | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 11  | SO2 Output selection                    | 131586        |       | 42  | Positioning completion range 2                       | 10            |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 12  | SO3 Output selection                    | 65793         |       | 43  | For manufacturer use                                 | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 13  | SO4 Output selection                    | 328964        |       | 44  | Position compare output pulse width setup *1         | 0.0           |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 14  | SO5 Output selection                    | 460551        |       | 45  | Position compare output polarity select              | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 15  | SO6 Output selection                    | 394758        |       | 46  | For manufacturer use                                 | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 16  | Analog monitor 1 type                   | 0             |       | 47  | Pulse output select                                  | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 17  | Analog monitor 1 output gain            | 0             |       | 48  | Position compare value 1                             | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 18  | Analog monitor 2 types                  | 4             |       | 49  | Position compare value 2                             | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 19  | Analog monitor 2 output gain            | 0             |       | 50  | Position compare value 3                             | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 20  | For manufacturer use                    | 0             |       | 51  | Position compare value 4                             | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 21  | Analog monitor output setup             | 0             |       | 52  | Position compare value 5                             | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 22  | Analog input 1 (AI1) offset setup *3    | 0             |       | 53  | Position compare value 6                             | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 23  | Analog input 1 (AI1) filter setup *3    | 0             |       | 54  | Position compare value 7                             | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 24  | Analog input 1 (AI1) excessive setup *3 | 0             |       | 55  | Position compare value 8                             | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 25  | Analog input 2 (AI2) offset setup *3    | 0             |       | 56  | Position compare output delay compensation amount *1 | 0.0           |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 26  | Analog input 2 (AI2) filter setup *1    | 0             |       | 57  | Position compare output assignment setup             | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 27  | Analog input 2 (AI2) excessive setup *3 | 0             |       |     |                                                      |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 28  | Analog input 3 (AI3) offset setup *3    | 0             |       |     |                                                      |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 29  | Analog input 3 (AI3) filter setup *3    | 0             |       |     |                                                      |               |      |     |           |               |      |     |           |               |      |     |           |               |
|           | 30  | Analog input 3 (AI3) excessive setup *3 | 0             |       |     |                                                      |               |      |     |           |               |      |     |           |               |      |     |           |               |

\* 1 Parameter with decimal point setup. Describe the decimal point value displayed on Panaterm. When checking the parameter file directly with text etc., the digits are shifted by the digits after the decimal point.  
Example) Pr 6.24 Load fluctuation correction filter Panaterm display: 0.53 Parameter file setup value: 53 Shift two decimal place digits   \* 2 The maximum value of torque limit setup (Pr0.13, Pr 5.22, Pr 5.25, Pr 5.26) varies depending on the applicable motor.  
\* 3 Can not be used with [A6SE], [A6SG].   \* 4 Can not be used with [A6SE].

| PARAMETER |          |                                                       |               | MODEL |     | MINAS-A6 (SE/SG/SF) series common                         |               |      |     |                                                      |               |      |     |                                         |               |
|-----------|----------|-------------------------------------------------------|---------------|-------|-----|-----------------------------------------------------------|---------------|------|-----|------------------------------------------------------|---------------|------|-----|-----------------------------------------|---------------|
| Cate      | Pr.      | Parameter                                             | Default value | Cate  | Pr. | Parameter                                                 | Default value | Cate | Pr. | Parameter                                            | Default value | Cate | Pr. | Parameter                               | Default value |
| 5         | 0        | 2nd command division/multiplication numerator         | 0             |       | 31  | Axis number                                               | 1             | 5    | 62  | Modbus mirror register setup 5 *4                    | 17429 [SE] 0  | 5    | 93  | No use                                  | -             |
|           | 1        | 3rd command division/multiplication numerator         | 0             |       | 32  | Command pulse input maximum setup/digital filter setup    | 4000          |      | 63  | Modbus mirror register setup 6 *4                    | 17418 [SE] 0  |      | 94  | Position compare output condition setup | 0             |
|           | 2        | 4th command division/multiplication numerator         | 0             |       | 33  | Pulse regeneration output limit enable                    | 0             |      | 64  | Modbus mirror register setup 7 *4                    | 17427 [SE] 0  |      | 95  | No use                                  | -             |
|           | 3        | Pulse output division denominator                     | 0             |       | 34  | For manufacturer use                                      | 4             |      | 65  | Modbus mirror register setup 8 *4                    | 17419 [SE] 0  |      | 96  | For manufacturer use                    | 0             |
|           | 4        | Drive prohibition input setup                         | 1             |       | 35  | Front panel lock                                          | 0             |      | 66  | Deterioration diagnosis convergence judgment time    | 0.0           |      | 97  | For manufacturer use                    | 0             |
|           | 5        | Sequence at drive prohibition                         | 0             |       | 36  | For manufacturer use                                      | 0             |      | 67  | Deterioration diagnosis inertia ratio upper limit    | 0             |      | 98  | No use                                  | -             |
|           | 6        | Sequence at servo-off                                 | 0             |       | 37  | Modbus connection setup *4                                | 0             |      | 68  | Deterioration diagnosis inertia ratio lower limit    | 0             |      | 99  | No use                                  | -             |
|           | 7        | Main power supply AC Off sequence                     | 0             |       | 38  | Modbus communication setup *4                             | 0             |      | 69  | Deterioration diagnosis unbalanced load upper limit  | 0.0           |      | 100 | No use                                  | -             |
|           | 8        | LV trip selection with the main power AC OFF          | 1             |       | 39  | Modbus response waiting time *4                           | 0             |      | 70  | Deterioration diagnosis unbalanced load lower limit  | 0.0           |      | 101 | No use                                  | -             |
|           | 9        | Main power supply AC Off detection time               | 70            |       | 40  | Modbus communication timeout time *4                      | 0             |      | 71  | Deterioration diagnosis dynamic friction upper limit | 0.0           |      | 102 | For manufacturer use                    | 0             |
|           | 10       | Sequence at alarm                                     | 0             |       | 41  | For manufacturer use                                      | 0             |      | 72  | Deterioration diagnosis dynamic friction lower limit | 0.0           |      | 103 | For manufacturer use                    | 0             |
|           | 11       | Immediate stop torque setup                           | 0             |       | 42  | Modbus broadcast setup *4                                 | 0             |      | 73  | Deterioration diagnosis viscous friction upper limit | 0.0           |      | 104 | No use                                  | -             |
|           | 12       | Overload level setup                                  | 0             |       | 43  | No use                                                    | -             |      | 74  | Deterioration diagnosis viscous friction lower limit | 0.0           |      | 105 | For manufacturer use                    | 0             |
|           | 13       | Overspeed level setup                                 | 0             |       | 44  | No use                                                    | -             |      | 75  | Deterioration diagnosis velocity setup               | 0             |      |     |                                         |               |
|           | 14       | Allowable motor operating range setup *1              | 1.0           |       | 45  | Quadrant projection positive direction compensation value | 0             |      | 76  | Deterioration diagnosis torque average time          | 0             |      |     |                                         |               |
|           | 15       | Control input signal read setup                       | 0             |       | 46  | Quadrant projection negative direction compensation value | 0             |      | 77  | Deterioration diagnosis torque upper limit           | 0.0           |      |     |                                         |               |
|           | 16       | Alarm clear input (A-CLR) setup                       | 0             |       | 47  | Quadrant projection compensation delay time               | 0             |      | 78  | Deterioration diagnosis torque lower limit           | 0.0           |      |     |                                         |               |
|           | 17       | Counter clear input (CL) setup                        | 3             |       | 48  | Quadrant projection compensation filter setup L           | 0             |      | 79  | Modbus mirror register setup 9 *4                    | 17410 [SE] 0  |      |     |                                         |               |
|           | 18       | Command pulse prohibition input (INH) disable setup   | 1             |       | 49  | Quadrant projection compensation filter setup H           | 0             |      | 80  | Modbus mirror register setup 10 *4                   | 17411 [SE] 0  |      |     |                                         |               |
|           | 19       | Command pulse prohibition input (INH) read setup      | 0             |       | 50  | For manufacturer use                                      | 0             |      | 81  | Modbus mirror register setup 11 *4                   | 16398 [SE] 0  |      |     |                                         |               |
|           | 20       | Position setup unit selection                         | 0             |       | 51  | For manufacturer use                                      | 0             |      | 82  | Modbus mirror register setup 12 *4                   | 16402 [SE] 0  |      |     |                                         |               |
|           | 21       | Torque limit selection                                | 1             |       | 52  | For manufacturer use                                      | 0             |      | 83  | Modbus mirror register setup 13 *4                   | 16411 [SE] 0  |      |     |                                         |               |
|           | 22 *2    | 2nd torque limit                                      | 500           |       | 53  | For manufacturer use                                      | 0             |      | 84  | Modbus mirror register setup 14 *4                   | 16405 [SE] 0  |      |     |                                         |               |
|           | 23       | Torque limit switch setup 1                           | 0             |       | 54  | For manufacturer use                                      | 0             |      | 85  | Modbus mirror register setup 15 *4                   | 16406 [SE] 0  |      |     |                                         |               |
|           | 24       | Torque limit switch setup 2                           | 0             |       | 55  | For manufacturer use                                      | 0             |      | 86  | Modbus mirror register setup 16 *4                   | 0             |      |     |                                         |               |
|           | 25       | Positive direction torque limit for external input *2 | 500           |       | 56  | Slow stop deceleration time setup                         | 0             |      | 87  | No use                                               | -             |      |     |                                         |               |
|           | 26       | Backward direction torque limit for external input *2 | 500           |       | 57  | Slow stop S-shape acceleration and deceleration setup     | 0             |      | 88  | No use                                               | -             |      |     |                                         |               |
|           | 27 *1 *3 | Analog torque limit input gain                        | 3.0           |       | 58  | Modbus mirror register setup 1 *4                         | 24591 [SE] 0  |      | 89  | No use                                               | -             |      |     |                                         |               |
|           | 28       | LED initial state                                     | 1             |       | 59  | Modbus mirror register setup 2 *4                         | 24592 [SE] 0  |      | 90  | No use                                               | -             |      |     |                                         |               |
|           | 29       | RS232 communication baud rate setup *4                | 2             |       | 60  | Modbus mirror register setup 3 *4                         | 16421 [SE] 0  |      | 91  | No use                                               | -             |      |     |                                         |               |
|           | 30       | RS485 communication baud rate setup *4                | 2             |       | 61  | Modbus mirror register setup 4 *4                         | 24613 [SE] 0  |      | 92  | No use                                               | -             |      |     |                                         |               |

\* 1 Parameter with decimal point setup. Describe the decimal point value displayed on Panaterm. When checking the parameter file directly with text etc., the digits are shifted by the digits after the decimal point.  
Example) Pr 6.24 Load fluctuation correction filter Panaterm display: 0.53 Parameter file setup value: 53 Shift two decimal place digits \* 2 The maximum value of torque limit setup (Pr0.13, Pr 5.22, Pr 5.25, Pr 5.26) varies depending on the applicable motor.  
\* 3 Can not be used with [A6SE], [A6SG]. \* 4 Can not be used with [A6SE].

| PARAMETER |     |                                                                          |                          | MODEL |     | MINAS-A6 (SE/SG/SF) series common                            |               |      |     |                                          |               |      |     |                            |               |
|-----------|-----|--------------------------------------------------------------------------|--------------------------|-------|-----|--------------------------------------------------------------|---------------|------|-----|------------------------------------------|---------------|------|-----|----------------------------|---------------|
| Cate      | Pr. | Parameter                                                                | Default value            | Cate  | Pr. | Parameter                                                    | Default value | Cate | Pr. | Parameter                                | Default value | Cate | Pr. | Parameter                  | Default value |
| 6         | 0   | Analog torque feed forward gain setup *3                                 | 0                        | 6     | 31  | Real time auto-gain tuning estimation speed                  | 1             | 6    | 62  | 1st resonance damping ratio              | 0             | 6    | 93  | No use                     | -             |
|           | 1   | No use                                                                   | -                        |       | 32  | Real time auto-gain tuning custom setup                      | 0             |      | 63  | 1st anti-resonance frequency             | 0             |      | 94  | No use                     | -             |
|           | 2   | Speed deviation excess setup                                             | 0                        |       | 33  | For manufacturer use                                         | 1000          |      | 64  | 1st anti-resonance damping ratio         | 0             |      | 95  | No use                     | -             |
|           | 3   | For manufacturer use                                                     | 0                        |       | 34  | Hybrid vibration suppression gain *3                         | 0             |      | 65  | 1st response frequency                   | 0             |      | 96  | No use                     | -             |
|           | 4   | JOG trial run command speed                                              | 300                      |       | 35  | Hybrid vibration suppression filter *3                       | 0.10          |      | 66  | 2nd resonance frequency                  | 0             |      | 97  | Function expansion setup 3 | 0             |
|           | 5   | Position control 3rd gain effective time                                 | 0.0                      |       | 36  | Dynamic brake operation input                                | 0             |      | 67  | 2nd resonance damping ratio              | 0             |      | 98  | Function expansion setup 4 | 0             |
|           | 6   | Position control 3rd gain scale factor                                   | 100                      |       | 37  | Oscillation detection threshold value                        | 0.0           |      | 68  | 2nd anti-resonance frequency             | 0             |      |     |                            |               |
|           | 7   | Additional value to torque command                                       | 0                        |       | 38  | Warning mask setup                                           | 4             |      | 69  | 2nd anti-resonance damping ratio         | 0             |      |     |                            |               |
|           | 8   | Torque compensation value in positive direction                          | 0                        |       | 39  | Warning mask setup 2                                         | 0             |      | 70  | 2nd response frequency                   | 0             |      |     |                            |               |
|           | 9   | Torque compensation value in negative direction                          | 0                        |       | 40  | No use                                                       | -             |      | 71  | 3rd damping depth                        | 0             |      |     |                            |               |
|           | 10  | Function expansion setup                                                 | 16                       |       | 41  | 1st damping depth                                            | 0             |      | 72  | 4th damping depth                        | 0             |      |     |                            |               |
|           | 11  | Current response setup                                                   | 100                      |       | 42  | Two-stage torque filter time constant                        | 0             |      | 73  | Load estimation filter                   | 0             |      |     |                            |               |
|           | 12  | No use                                                                   | -                        |       | 43  | Two-stage torque filter damping term                         | 0             |      | 74  | Torque compensating frequency 1          | 0             |      |     |                            |               |
|           | 13  | 2nd inertia ratio                                                        | 250                      |       | 44  | No use                                                       | -             |      | 75  | Torque compensating frequency 2          | 0             |      |     |                            |               |
|           | 14  | Immediate stop time at the time of alarming                              | 200                      |       | 45  | No use                                                       | -             |      | 76  | Load estimation count                    | 0             |      |     |                            |               |
|           | 15  | 2nd overspeed level setup                                                | 0                        |       | 46  | No use                                                       | -             |      | 77  | No use                                   | -             |      |     |                            |               |
|           | 16  | For manufacturer use                                                     | 0                        |       | 47  | Function expansion setups 2                                  | 1             |      | 78  | For manufacturer use                     | 0             |      |     |                            |               |
|           | 17  | Front panel parameter writing selection                                  | 0                        |       | 48  | Adjustment filter                                            | *5            |      | 79  | For manufacturer use                     | 0             |      |     |                            |               |
|           | 18  | Power turn-on wait time                                                  | 0                        |       | 49  | Command response filter/adjustment filter damping term setup | 15            |      | 80  | No use                                   | -             |      |     |                            |               |
|           | 19  | Encoder Z-phase setup                                                    | 0                        |       | 50  | Viscous friction compensation gain                           | 0.0           |      | 81  | No use                                   | -             |      |     |                            |               |
|           | 20  | External scale Z-phase expansion setup *3                                | 0                        |       | 51  | Immediate stop completion wait time                          | 0             |      | 82  | No use                                   | -             |      |     |                            |               |
|           | 21  | Serial absolute external scale Z phase setup *3                          | 0                        |       | 52  | For manufacturer use                                         | 0             |      | 83  | No use                                   | -             |      |     |                            |               |
|           | 22  | AB-phase output external scale AB phase regeneration method selection *3 | 0                        |       | 53  | For manufacturer use                                         | 0             |      | 84  | No use                                   | -             |      |     |                            |               |
|           | 23  | Load fluctuation correction gain                                         | 0                        |       | 54  | For manufacturer use                                         | 0             |      | 85  | No use                                   | -             |      |     |                            |               |
|           | 24  | Load fluctuation correction filter                                       | 0.53                     |       | 55  | No use                                                       | -             |      | 86  | No use                                   | -             |      |     |                            |               |
|           | 25  | For manufacturer use                                                     | Size A-G 0<br>Size H 500 |       | 56  | No use                                                       | -             |      | 87  | For manufacturer use                     | 0             |      |     |                            |               |
|           | 26  | For manufacturer use                                                     | 2                        |       | 57  | Torque saturation error protection detection time            | 0             |      | 88  | Absolute multi-rotation data upper limit | 0             |      |     |                            |               |
|           | 27  | Warning latch time                                                       | 5                        |       | 58  | Serial absolute external scale Z phase shift amount *3       | 0             |      | 89  | No use                                   | -             |      |     |                            |               |
|           | 28  | Special function selection                                               | 0                        |       | 59  | For manufacturer use                                         | 0             |      | 90  | No use                                   | -             |      |     |                            |               |
|           | 29  | No use                                                                   | -                        |       | 60  | 2nd damping depth                                            | 0             |      | 91  | No use                                   | -             |      |     |                            |               |
|           | 30  | For manufacturer use                                                     | 0                        |       | 61  | 1st resonance frequency                                      | 0             |      | 92  | No use                                   | -             |      |     |                            |               |

\* 1 Parameter with decimal point setup. Describe the decimal point value displayed on Panaterm. When checking the parameter file directly with text etc., the digits are shifted by the digits after the decimal point.  
Example) Pr 6.24 Load fluctuation correction filter Panaterm display: 0.53 Parameter file setup value: 53 Shift two decimal place digits \* 2 The maximum value of torque limit setup (Pr0.13, Pr 5.22, Pr 5.25, Pr 5.26) varies depending on the applicable motor.  
\* 3 Can not be used with [A6SE], [A6SG]. \* 4 Can not be used with [A6SE]. \* 5 Size A 1.1 , Size B-C 1.2 , Size D-G 1.7 , Size H E3/E4 1.6 , Size H F3/F4 1.7 , Size V 5B/5C 1.2 , Size V others 1.1

\* 1 Parameter with decimal point setup. Describe the decimal point value displayed on Panterm. When checking the parameter file directly with text etc., the digits are shifted by the digits after the decimal point.  
Example) Pr 6.24 Load fluctuation correction filter Panterm display: 0.53 Parameter file setup value: 53 Shift two decimal place digits \* 2 The maximum value of torque limit setup (Pr0.13, Pr 5.22, Pr 5.25, Pr 5.26) varies depending on the applicable motor.  
\* 3 Can not be used with [A6SE], [A6SG]. \* 4 Can not be used with [A6SE].

| MODEL | MINAS-A6 (SE/SG/SF) series common |
|-------|-----------------------------------|
|-------|-----------------------------------|

\* 1 Parameter with decimal point setup. Describe the decimal point value displayed on Panaterm. When checking the parameter file directly with text etc., the digits are shifted by the digits after the decimal point.  
Example) Pr 6.24 Load fluctuation correction filter Panaterm display: 0.53 Parameter file setup value: 53 Shift two decimal place digits \* 2 The maximum value of torque limit setup (Pr0.13, Pr 5.22, Pr 5.25, Pr 5.26) varies depending on the applicable motor.  
\* 3 Can not be used with [A6SE], [A6SG]. \* 4 Can not be used with [A6SE].

|           |       |                                   |
|-----------|-------|-----------------------------------|
| PARAMETER | MODEL | MINAS-A6 (SE/SG/SF) series common |
|-----------|-------|-----------------------------------|

| Cate | Pr.     | Parameter            | Default value | Cate | Pr. | Parameter            | Default value | Cate | Pr. | Parameter | Default value | Cate | Pr. | Parameter | Default value | Cate | Pr. | Parameter | Default value |
|------|---------|----------------------|---------------|------|-----|----------------------|---------------|------|-----|-----------|---------------|------|-----|-----------|---------------|------|-----|-----------|---------------|
| 9    | 0       | For manufacturer use | 1             | 9    | 31  | No use               | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 1<br>*1 | For manufacturer use | 0             |      | 32  | No use               | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 2<br>*1 | For manufacturer use | 0             |      | 33  | No use               | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 3       | For manufacturer use | 0             |      | 34  | No use               | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 4<br>*1 | For manufacturer use | 0             |      | 35  | No use               | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 5<br>*1 | For manufacturer use | 0             |      | 36  | No use               | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 6<br>*1 | For manufacturer use | 0             |      | 37  | No use               | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 7<br>*1 | For manufacturer use | 0             |      | 38  | No use               | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 8<br>*1 | For manufacturer use | 0             |      | 39  | No use               | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 9<br>*1 | For manufacturer use | 0             |      | 40  | No use               | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 10      | For manufacturer use | 0             |      | 41  | No use               | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 11      | For manufacturer use | 1             |      | 42  | No use               | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 12      | For manufacturer use | 80            |      | 43  | No use               | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 13      | For manufacturer use | 50            |      | 44  | No use               | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 14      | For manufacturer use | 10            |      | 45  | No use               | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 15      | No use               | -             |      | 46  | No use               | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 16      | No use               | -             |      | 47  | No use               | -             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 17      | For manufacturer use | 0             |      | 48  | For manufacturer use | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 18      | For manufacturer use | 0             |      | 49  | For manufacturer use | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 19      | For manufacturer use | 0             |      | 50  | For manufacturer use | 0             |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 20      | For manufacturer use | 0             |      |     |                      |               |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 21      | For manufacturer use | 0             |      |     |                      |               |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 22      | For manufacturer use | 200           |      |     |                      |               |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 23      | For manufacturer use | 50            |      |     |                      |               |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 24      | For manufacturer use | 100           |      |     |                      |               |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 25      | For manufacturer use | 40            |      |     |                      |               |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 26      | For manufacturer use | 40            |      |     |                      |               |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 27      | For manufacturer use | 1000          |      |     |                      |               |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 28      | For manufacturer use | 1.00          |      |     |                      |               |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 29      | For manufacturer use | 0             |      |     |                      |               |      |     |           |               |      |     |           |               |      |     |           |               |
|      | 30      | For manufacturer use | 0             |      |     |                      |               |      |     |           |               |      |     |           |               |      |     |           |               |

\* 1 Parameter with decimal point setup. Describe the decimal point value displayed on Panaterm. When checking the parameter file directly with text etc., the digits are shifted by the digits after the decimal point.  
Example) Pr 6.24 Load fluctuation correction filter Panaterm display: 0.53 Parameter file setup value: 53 Shift two decimal place digits    \* 2 The maximum value of torque limit setup (Pr0.13, Pr 5.22, Pr 5.25, Pr 5.26) varies depending on the applicable motor.  
\* 3 Can not be used with [A6SE], [A6SG].    \* 4 Can not be used with [A6SE].

|           |       |                                   |
|-----------|-------|-----------------------------------|
| PARAMETER | MODEL | MINAS-A6 (SE/SG/SF) series common |
|-----------|-------|-----------------------------------|

| Cate | Pr. | Parameter            | Default value | Cate | Pr. | Parameter            | Default value | Cate | Pr. | Parameter | Default value | Cate | Pr. | Parameter | Default value |
|------|-----|----------------------|---------------|------|-----|----------------------|---------------|------|-----|-----------|---------------|------|-----|-----------|---------------|
| 15   | 0   | For manufacturer use | 0             | 15   | 31  | For manufacturer use | 5             |      |     |           |               |      |     |           |               |
|      | 1   | No use               | -             |      | 32  | No use               | -             |      |     |           |               |      |     |           |               |
|      | 2   | No use               | -             |      | 33  | For manufacturer use | 0             |      |     |           |               |      |     |           |               |
|      | 3   | No use               | -             |      | 34  | For manufacturer use | 0             |      |     |           |               |      |     |           |               |
|      | 4   | No use               | -             |      | 35  | For manufacturer use | 0             |      |     |           |               |      |     |           |               |
|      | 5   | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 6   | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 7   | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 8   | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 9   | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 10  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 11  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 12  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 13  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 14  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 15  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 16  | For manufacturer use | 2             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 17  | For manufacturer use | 4             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 18  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 19  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 20  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 21  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 22  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 23  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 24  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 25  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 26  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 27  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 28  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 29  | No use               | -             |      |     |                      |               |      |     |           |               |      |     |           |               |
|      | 30  | For manufacturer use | 6             |      |     |                      |               |      |     |           |               |      |     |           |               |

\* 1 Parameter with decimal point setup. Describe the decimal point value displayed on Panaterm. When checking the parameter file directly with text etc., the digits are shifted by the digits after the decimal point.  
Example) Pr 6.24 Load fluctuation correction filter Panaterm display: 0.53 Parameter file setup value: 53 Shift two decimal place digits   \* 2 The maximum value of torque limit setup (Pr0.13, Pr 5.22, Pr 5.25, Pr 5.26) varies depending on the applicable motor.  
\* 3 Can not be used with [A6SE], [A6SG].   \* 4 Can not be used with [A6SE].

| MODEL | MINAS-A6 (SE/SG/SF) series common |
|-------|-----------------------------------|
|-------|-----------------------------------|

\* 1 Parameter with decimal point setup. Describe the decimal point value displayed on Panaterm. When checking the parameter file directly with text etc., the digits are shifted by the digits after the decimal point.  
Example) Pr 6.24 Load fluctuation correction filter Panaterm display: 0.53 Parameter file setup value: 53 Shift two decimal place digits

\* 2 The maximum value of torque limit setup (Pr0.13, Pr 5.22, Pr 5.25, Pr 5.26) varies depending on the applicable motor.

\* 3 Can not be used with [A6SE], [A6SG]. \* 4 Can not be used with [A6SE].