

! To Be Discontinued
Last time buy: March 31, 2020

**Compactness and High Reliability
Realized with Unique Polarized
Actuator Construction
Non-latching Type Also Available**

WA OPTICAL SWITCHES (AWAP)



RoHS compliant

FEATURES

- 1. Small size, Low height**
L: 31 mm × W: 16 mm × H: 9 mm L: 1.220 inch × W: .630 inch × H: .354 inch
- 2. Low Insertion Loss**
Achieved 1dB max. insertion loss (Typ. 0.5dB)
- 3. Non-latching and latching types available.**
- 4. Conforms to Telcordia GR-1221-core**
Everything is produced under one roof from internal mechanical relays to optical products. We ensure high reliability by harnessing our powerful production technology that has been cultivated over many years.

APPLICATIONS

- Optical ADM equipment
- Protection switching (WDM, CATV, FTTH)
- Optical measuring instrument

ORDERING INFORMATION

AWAP

WA Optical Switch

Switch type
0: 1 × 2
1: 2 × 2

Fiber type and wavelength		Wavelength		
		1310 nm	1550 nm	1310/1550 nm
Single mode (9/125/900)		0	1	2

Fiber type		Wavelength		
		850 nm	1310 nm	850/1310 nm
Multi mode (50/125/900)		3	4	5
Multi mode (62.5/125/900)		6	7	8

Operation type
0: Non-latching type
1: 1-coil latching type
2: 2-coil latching type

Connector type (For other connector types, please contact us.)

Connector type	SC/AdPC	MU/AdPC
	2	3

Nominal operating voltage
1: 3 VDC
6: 4.5 VDC
9: 5 VDC

Note: MU connector is Single mode only.

TYPES

1. 1 × 2 type (single mode)

Wavelength	Nominal operating voltage	Non-latching type		1-coil latching type		2-coil latching type	
		SC/AdPC connector	MU/AdPC connector	SC/AdPC connector	MU/AdPC connector	SC/AdPC connector	MU/AdPC connector
1310±20nm	3V	AWAP00021	AWAP00031	AWAP00121	AWAP00131	AWAP00221	AWAP00231
	4.5V	AWAP00026	AWAP00036	AWAP00126	AWAP00136	AWAP00226	AWAP00236
	5V	AWAP00029	AWAP00039	AWAP00129	AWAP00139	AWAP00229	AWAP00239
1550±20nm	3V	AWAP01021	AWAP01031	AWAP01121	AWAP01131	AWAP01221	AWAP01231
	4.5V	AWAP01026	AWAP01036	AWAP01126	AWAP01136	AWAP01226	AWAP01236
	5V	AWAP01029	AWAP01039	AWAP01129	AWAP01139	AWAP01229	AWAP01239
1310/1550nm	3V	AWAP02021	AWAP02031	AWAP02121	AWAP02131	AWAP02221	AWAP02231
	4.5V	AWAP02026	AWAP02036	AWAP02126	AWAP02136	AWAP02226	AWAP02236
	5V	AWAP02029	AWAP02039	AWAP02129	AWAP02139	AWAP02229	AWAP02239

Standard packing; Inner carton: 1 pcs., Outer case: 1 pcs.

2. 1 × 2 type (multi mode)

Fiber type	Wavelength	Nominal operating voltage	Non-latching type	1-coil latching type	2-coil latching type
			SC/AdPC connector	SC/AdPC connector	SC/AdPC connector
Multi mode (50/125/900)	850±20nm	3V	AWAP03021	AWAP03121	AWAP03221
		4.5V	AWAP03026	AWAP03126	AWAP03226
		5V	AWAP03029	AWAP03129	AWAP03229
	1310±20nm	3V	AWAP04021	AWAP04121	AWAP04221
		4.5V	AWAP04026	AWAP04126	AWAP04226
		5V	AWAP04029	AWAP04129	AWAP04229
	850/1310nm	3V	AWAP05021	AWAP05121	AWAP05221
		4.5V	AWAP05026	AWAP05126	AWAP05226
		5V	AWAP05029	AWAP05129	AWAP05229
Multi mode (62.5/125/900)	850±20nm	3V	AWAP06021	AWAP06121	AWAP06221
		4.5V	AWAP06026	AWAP06126	AWAP06226
		5V	AWAP06029	AWAP06129	AWAP06229
	1310±20nm	3V	AWAP07021	AWAP07121	AWAP07221
		4.5V	AWAP07026	AWAP07126	AWAP07226
		5V	AWAP07029	AWAP07129	AWAP07229
	850/1310nm	3V	AWAP08021	AWAP08121	AWAP08221
		4.5V	AWAP08026	AWAP08126	AWAP08226
		5V	AWAP08029	AWAP08129	AWAP08229

Standard packing; Inner carton: 1 pcs., Outer case: 1 pcs.

3. 2 × 2 type (single mode)

Wavelength	Nominal operating voltage	Non-latching type		1-coil latching type		2-coil latching type	
		SC/AdPC connector	MU/AdPC connector	SC/AdPC connector	MU/AdPC connector	SC/AdPC connector	MU/AdPC connector
1310±20nm	3V	AWAP10021	AWAP10031	AWAP10121	AWAP10131	AWAP10221	AWAP10231
	4.5V	AWAP10026	AWAP10036	AWAP10126	AWAP10136	AWAP10226	AWAP10236
	5V	AWAP10029	AWAP10039	AWAP10129	AWAP10139	AWAP10229	AWAP10239
1550±20nm	3V	AWAP11021	AWAP11031	AWAP11121	AWAP11131	AWAP11221	AWAP11231
	4.5V	AWAP11026	AWAP11036	AWAP11126	AWAP11136	AWAP11226	AWAP11236
	5V	AWAP11029	AWAP11039	AWAP11129	AWAP11139	AWAP11229	AWAP11239
1310/1550nm	3V	AWAP12021	AWAP12031	AWAP12121	AWAP12131	AWAP12221	AWAP12231
	4.5V	AWAP12026	AWAP12036	AWAP12126	AWAP12136	AWAP12226	AWAP12236
	5V	AWAP12029	AWAP12039	AWAP12129	AWAP12139	AWAP12229	AWAP12239

Standard packing; Inner carton: 1 pcs., Outer case: 1 pcs.

4. 2 × 2 type (multi mode)

Fiber type	Wavelength	Nominal operating voltage	Non-latching type	1-coil latching type	2-coil latching type
			SC/AdPC connector	SC/AdPC connector	SC/AdPC connector
Multi mode (50/125/900)	850±20nm	3V	AWAP13021	AWAP13121	AWAP13221
		4.5V	AWAP13026	AWAP13126	AWAP13226
		5V	AWAP13029	AWAP13129	AWAP13229
	1310±20nm	3V	AWAP14021	AWAP14121	AWAP14221
		4.5V	AWAP14026	AWAP14126	AWAP14226
		5V	AWAP14029	AWAP14129	AWAP14229
	850/1310nm	3V	AWAP15021	AWAP15121	AWAP15221
		4.5V	AWAP15026	AWAP15126	AWAP15226
		5V	AWAP15029	AWAP15129	AWAP15229
Multi mode (62.5/125/900)	850±20nm	3V	AWAP16021	AWAP16121	AWAP16221
		4.5V	AWAP16026	AWAP16126	AWAP16226
		5V	AWAP16029	AWAP16129	AWAP16229
	1310±20nm	3V	AWAP17021	AWAP17121	AWAP17221
		4.5V	AWAP17026	AWAP17126	AWAP17226
		5V	AWAP17029	AWAP17129	AWAP17229
	850/1310nm	3V	AWAP18021	AWAP18121	AWAP18221
		4.5V	AWAP18026	AWAP18126	AWAP18226
		5V	AWAP18029	AWAP18129	AWAP18229

Standard packing; Inner carton: 1 pcs., Outer case: 1 pcs.
Note: For other connector types, please contact us.

RATING


1. Coil data (at 20°C 68°F)

Drive type	Nominal operating voltage	Nominal operating current (±10%)	Coil resistance (±10%)	Nominal operating power	Max. applied voltage
Non-latching type	3 V DC	83.3 mA	36Ω	250 mW	130% V DC of the nominal operating voltage
	4.5 V DC	55.5 mA	81Ω		
	5 V DC	50.0 mA	100Ω		
1-coil latching type	3 V DC	50.0 mA	60Ω	150 mW	
	4.5 V DC	33.3 mA	135Ω		
	5 V DC	30.0 mA	166.7Ω		
2-coil latching type	3 V DC	66.7 mA	45Ω	200 mW	
	4.5 V DC	44.4 mA	101.3Ω		
	5 V DC	40.0 mA	125Ω		

2. Specifications

Item	Specifications		
	Single mode	Multi mode	
Optical characteristics	Insertion loss*1	Max. 1.0 dB	
	Isolation	Min. 60 dB	
	Return loss*1	Min. 50 dB	
	P.D.L.*1	Max. 0.1 dB	
Optical input power	Max. 100 mW (20 dBm)		
Expected life	Mechanical life		
Mechanical characteristics	Min. 10 ⁷ (at 20°C 68°F, at 180 cpm)		
	Vibration resistance	Functional	10 to 55 Hz at double amplitude of 0.75 mm (Optical power fluctuation: Max. 1 dB)
		Destructive	10 to 55 Hz at double amplitude of 1.52 mm
	Shock resistance (Half-wave pulse of sine wave: 11 ms)	Functional	Non-latching type: Min. 100 m/s ² (Optical power fluctuation: 1 dB or less) Latching type: Min. 200 m/s ² (Optical power fluctuation: 1 dB or less)
Destructive		Min. 500 m/s ²	
Electrical characteristics	Switching time (at 20°C 68°F)*2		
Non-latching type: Max. 15 ms (Nominal applied operating voltage) Latching type: Max. 10 ms (Nominal applied operating voltage)			
Fiber tensile strength			
450 g, Tension rate: 0.4 mm/sec, 1 min.			
Fiber flexural tensile strength			
230 g, 5 sec., Tension direction 90° (perpendicular with fiber)			
Conditions	Conditions for operation, transport and storage		
Ambient temperature -40 to +70°C -40 to +158°F, Humidity 5 to 85% R.H. (Not freezing and condensing at low temperature)			
Unit weight	Approx. 11 g .388 oz (Not including connector)		

Notes: 1. Without connectors' loss. Insertion loss is approx. 0.2 dB per connector.
Return loss at connector parts is approx. 50 dB.
2. Oscilloscope waveform of switching characteristic.

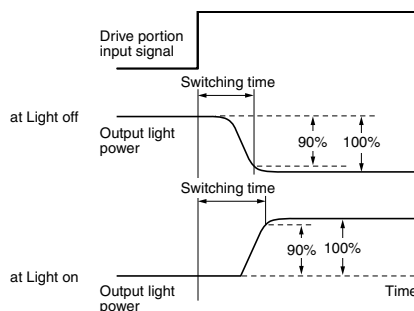


DIMENSIONS (mm inch)

The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://industrial.panasonic.com/ac/e/>


1. 1 × 2 type

CAD Data

External dimensions

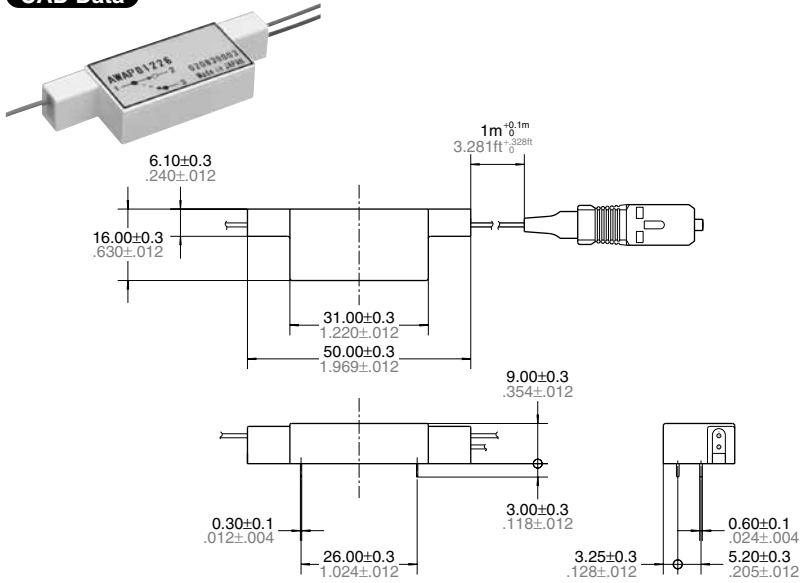


Optical signal I/O and coil impress direction indication diagram
1 × 2, Non-latching type

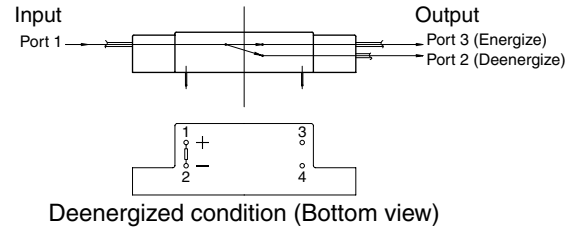


Deenergized condition (Bottom view)

1 × 2, 1-coil latching type

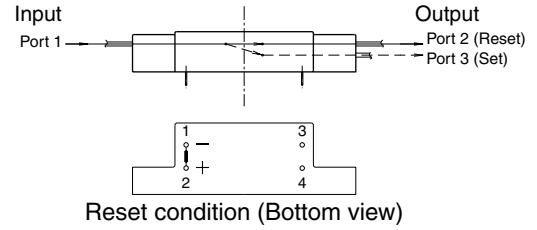

Reset condition (Bottom view)

1 × 2, 2-coil latching type

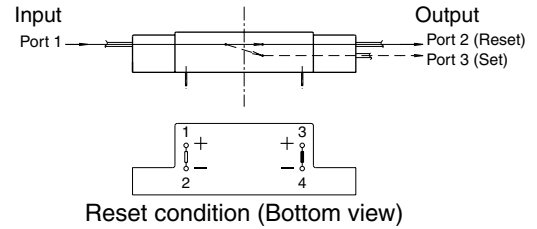


Reset condition (Bottom view)


2. 2 × 2 type

CAD Data

External dimensions

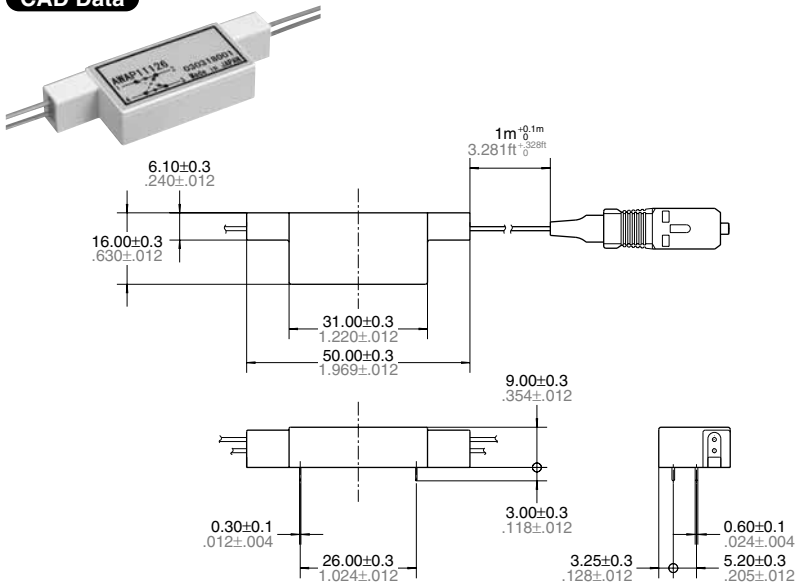


Optical signal I/O and coil impress direction indication diagram
2 × 2, Non-latching type

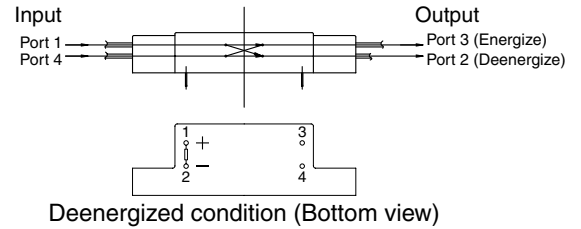


Deenergized condition (Bottom view)

2 × 2, 1-coil latching type

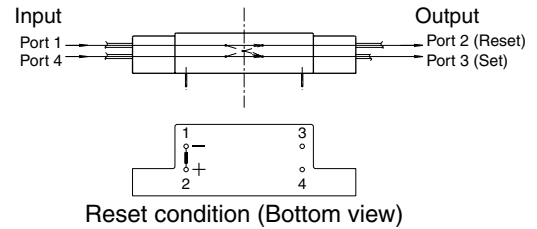

Reset condition (Bottom view)

2 × 2, 2-coil latching type

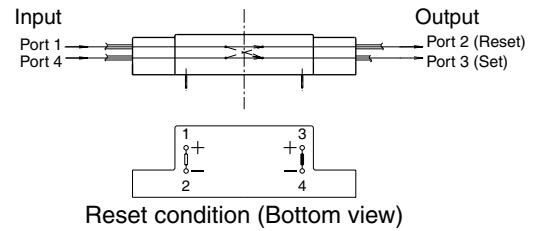

Reset condition (Bottom view)

Reset (Deenergize)	Port 1 → Port 2 Port 4 → Port 3
Set (Energize)	Port 1 → Port 3 Port 4 → Port 2

PC board pattern

(Tolerance: $\pm 0.1 \pm 0.004$)



Nominal operating voltage applied method

	Terminal No.	Non-latching type	1- coil latching type	2- coil latching type
Set Energize	1	+V	+V	+V
	2	GND	GND	GND
	3	-	-	-
	4	-	-	-
Reset Deenergize	1	-	GND	-
	2	-	+V	-
	3	-	-	+V
	4	-	-	GND

NOTES

1. Operation, transport and storage conditions

1) Temperature:

-40 to +70°C -40 to +158°F


2) Humidity: 5 to 85% RH

(Avoid freezing and condensation.)

The humidity range varies with the temperature. Use within the range indicated in the graph below.

3) Atmospheric pressure: 86 to 106 kPa

Temperature and humidity range for usage, transport, and storage

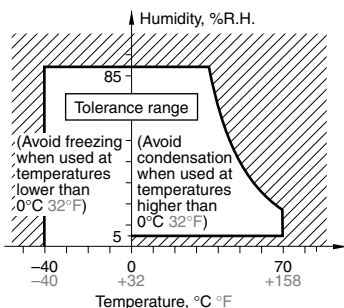

2. Solder and cleaning conditions

1) Adhere to the conditions below when soldering this switch.

Solder iron tip temperature:

400°C 752°F min.

Soldering iron: 60 to 100 W

Soldering time: within 5 seconds

The effect on the switch will differ depending on the type of PC board used.

For this reason, please verify using the actual PC board to be worked on.

2) This switch cannot be washed.

3. Precautions for use

1) Since this switch is polarized, reversing the coil + and - terminals will cause reverse operation. Be sure to connect following the attached product specification diagram.

2) Keep the ripple rate of the nominal coil voltage below 5%.

3) Avoid exceeding the specification ranges such as those for coil nominal voltage, contact rating and optical input power. Exceeding specifications can cause abnormal heating or deterioration of performance.

4) For fiber, avoid bending to a radius smaller than 30 mm 1.181 inch as doing so can cause breakage.

5) If a switch has been subjected to a strong shock such as dropping, do not use it.

6) (Only latching type) Considering the possible change in ambient temperature and other conditions, it is recommended that the coil impress set and reset pulse width be at the nominal operation voltage and at least 20 ms to make certain of operation.

7) (Only latching type) This switch is shipped from the factory in the reset state. A shock to the switch during shipping or installation may cause it to change to the set state. Therefore, it is recommended that the switch be used in a circuit which initializes it to the required state (set or reset) whenever the power is turned on.

For Cautions for Use, see Relay Technical Information.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic[®]

©Panasonic Corporation 2019