


Packing specifications

◇ Dimension of carrier tape

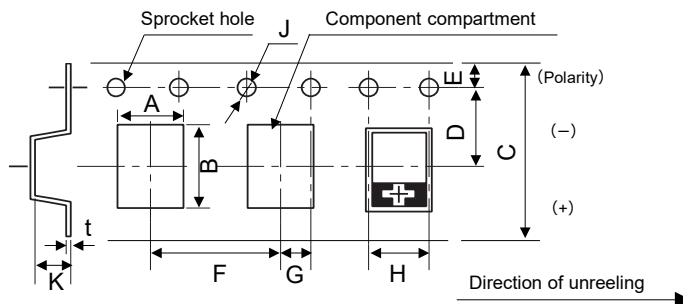


Unit : mm

Size code	A±0.2	B±0.2	C±0.3	D±0.1	E±0.1	F±0.1	G±0.1	H±0.1	J $\begin{smallmatrix} +0.1 \\ -0 \end{smallmatrix}$	K±0.1	t±0.1
B1	3.2	3.8	8.0	3.5	1.75	4.0	2.0	4.0	ø1.5	1.4	0.25
B1S	3.25	3.9	8.0	3.5	1.75	4.0	2.0	4.0	ø1.5	1.7	0.25
B2	3.3	3.8	8.0	3.5	1.75	4.0	2.0	4.0	ø1.5	2.1	0.25
B2S	3.25	4.0	8.0	3.5	1.75	4.0	2.0	4.0	ø1.5	2.1	0.25
D15	4.5	7.5	12.0	5.5	1.75	8.0	2.0	4.0	ø1.5	2.4	0.3
D15S	4.7	7.8	12.0	5.5	1.75	8.0	2.0	4.0	ø1.5	1.7	0.3
D2E	4.5	7.5	12.0	5.5	1.75	8.0	2.0	4.0	ø1.5	2.4	0.3
D2	4.5	7.5	12.0	5.5	1.75	8.0	2.0	4.0	ø1.5	2.4	0.3
D2S	4.5	7.8	12.1	5.5	1.75	8.0	2.0	4.0	ø1.5	2.4	0.3
D3L	4.5	7.7	12.0	5.5	1.75	8.0	2.0	4.0	ø1.5	3.2	0.3
D4	4.5	7.7	12.0	5.5	1.75	8.0	2.0	4.0	ø1.5	4.2	0.3

- Dimension A and B are the measure of compartment's inside bottom.
- The (+) Polarity of the chip is placed on right side towards the unreeling direction.
- Dimension of the topcover tape.
Thickness of cover tape: 62±10 µm, Width of cover tape : 9.5±0.2 mm 5.5±0.2 mm (ø180)

◇ Reel dimension

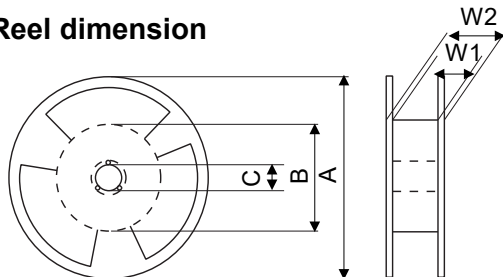

Unit : mm

A	B	C	W1	W2
ø330±2	ø80±2	ø13.0±0.2	13.5±0.5	17.5±1.0
ø180 $\begin{smallmatrix} 0 \\ -3 \end{smallmatrix}$	ø60±2	ø13.0±0.2	9.0±0.5	11.4±1.0

◇ Minimum packing quantity and weight

〈ø180〉


Size code	Qty. (pcs./Reel)	Typical weight (g)
B1	3000	200
B1S	2500	200
B2, B2S	2000	200

〈ø330〉

Size code	Qty. (pcs./Reel)	Typical weight (g)
D15	3000	1000
D15S	4000	1000
D2E, D2, D2S	3000	1000
D3L	2500	1100
D4	2000	1200

※ Small order quantity (500 pcs/reel) is available with TPE, TPF and TQC series.
Please contact our sales representative if you prefer it.

◇ Dimension of packing case



Unit : mm

Reel size	ø180	ø330
a	90	120
b	240	360
c	240	360

◇ Units per packing case

Size code	Pieces/case	Size code	Pieces/case
B1	15000	D15	15000
B1S	12500	D15S	20000
B2, B2S	10000	D2E, D2, D2S	15000
		D3L	12500
		D4	10000